



Customer information packet

ECP84308T-5

40HP, 1190RPM, 3PH, 60HZ, 364T, A36062M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	364T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	40.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV NEMA PREMIUM NEMA_PREMIUM UR CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	6-60
Current @ Voltage	39.500 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3A
Heater Indicator	No Heater
High Voltage Full Load Amps	39.5 a
Insulation Class	F

Part detail


Revision	R
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG0511
Layout	617428-603
Eff. date	08-26-2024
CD Diagram	416820-036
Poles	06
Leads	3#6
Proprietary	False
Created date	11-27-2018

Inverter Code	Inverter Ready
IP Rating	IP56
KVA Code	G
Lifting Lugs	No Lifting Lugs
Max Speed	1800 rpm
Motor Lead Quantity/Wire Size	3 @ 6 AWG
Motor Standards	NEMA
Motor Type	A36062M
Mounting Arrangement	F1
No Load Current	14.2 a
Number of Poles	6
Overall Length	33.49 IN
Power Factor	80
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Phase Seq-Std Rot (CCWODE)
Shaft Slinger Indicator	No Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None


Nameplate


NP4388																
CAT #	ECP84308T-5						FR	364T			IP56					
SPEC	A36-6000-0511						ENCL	TEFC			DES	B				
HZ	60	PH	3	CL	F	HP	40	SF	1.15	PF	80	%	CODE	G		
VOLTS	575					AMPS	39.5									
RPM	1190		MAX RPM		1800		SER									
NEMA NOM. EFF	94.1	%		RATING		40C AMB-CONT										
GUAR MIN. EFF	93	%		BRG DE		6313			BRG ODE		6313					
CL I DIV 2 GRPS A,B,C,D				CL I ZONE 2 GRPS						IIA,IIB,IIC			TEMP T		3-200	C
CT HZ	6-60		VT HZ		0-60											
CHP HZ	60-90		INV TEMP CL				200	C								
								MTR WT		922	LBS					

NP4333									
CAT #	ECP84308T-5		ROTOR BARS		55				
SPEC	A36-6000-0511		STATOR SLOTS		72				
SER			MAX CORR KVAR		12				
GREASE	POLYREX EM								
ABMA DE BRG	65BC03J30X		ODE	65BC03J30X					
SPACE HEATER LEADS H1-H2:									
TIE LIKE NUMBERS									
TOGETHER									
MAX. SPACE HEATER TEMP.		C	V		A		W		

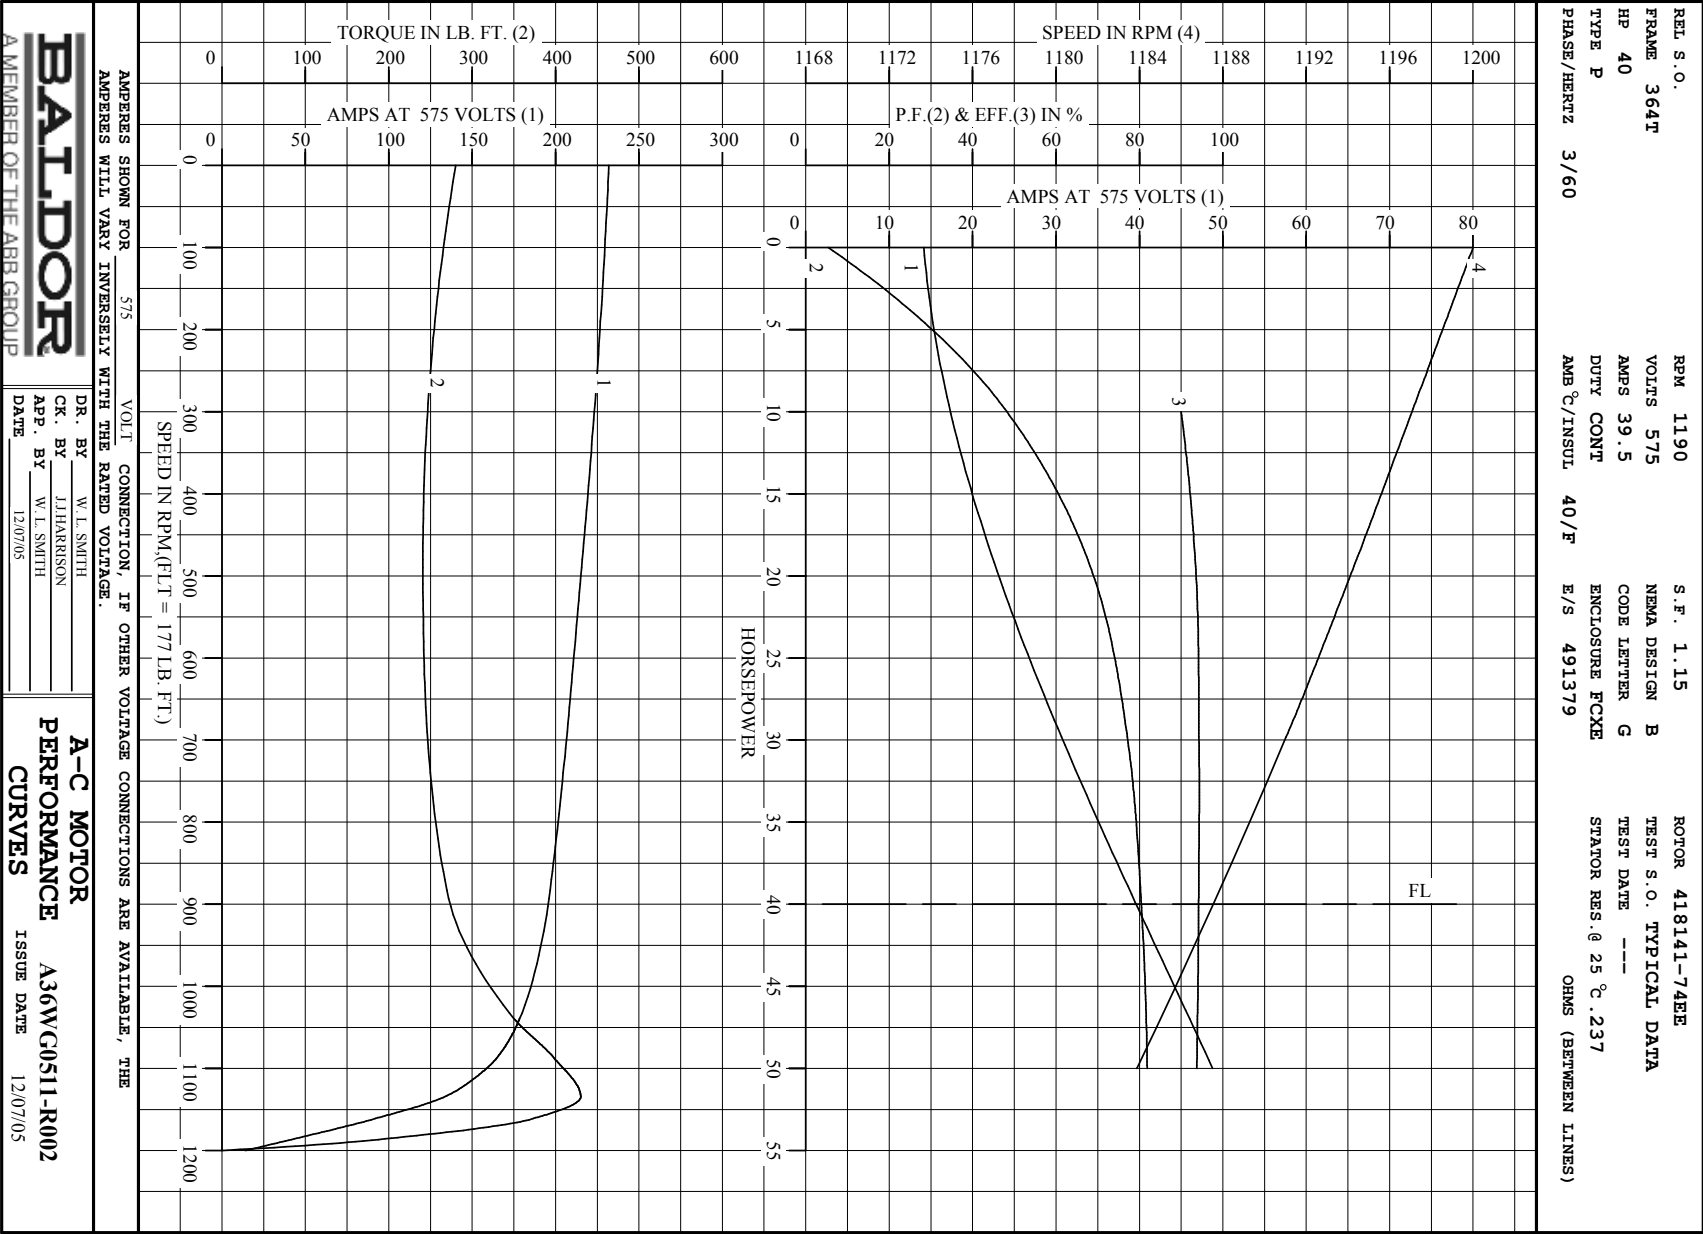


REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	364T	40	P	3/60	1190	575
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
39.5	CONT	40/F	1.15	B	G	FCXE
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
491379	418141-74EE	---	---	.237		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	14.2	1200	5.41	0	
1/4	10.0	17.3	1197	48.3	90.0	
2/4	20.0	23.2	1194	69.0	93.6	
3/4	30.0	30.8	1191	77.2	94.3	
4/4	40.0	39.5	1188	80.5	94.2	
5/4	50.0	48.8	1184	81.9	93.7	
SPEED TORQUE						
LOCKED ROTOR	0		158	280	232	
PULL UP	480		136	241	216	
BREAKDOWN	1135		243	430	133	
FULL LOAD	1188		100	177	39.5	
AMPERES SHOWN FOR 575. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA						
BALDOR A MEMBER OF THE ABB GROUP		DR. BY W. L. SMITH CK. BY J. J. HARRISON APP. BY W. L. SMITH DATE 12/07/05		A-C MOTOR PERFORMANCE DATA A36WG0511-R002 ISSUE DATE 12/07/05		

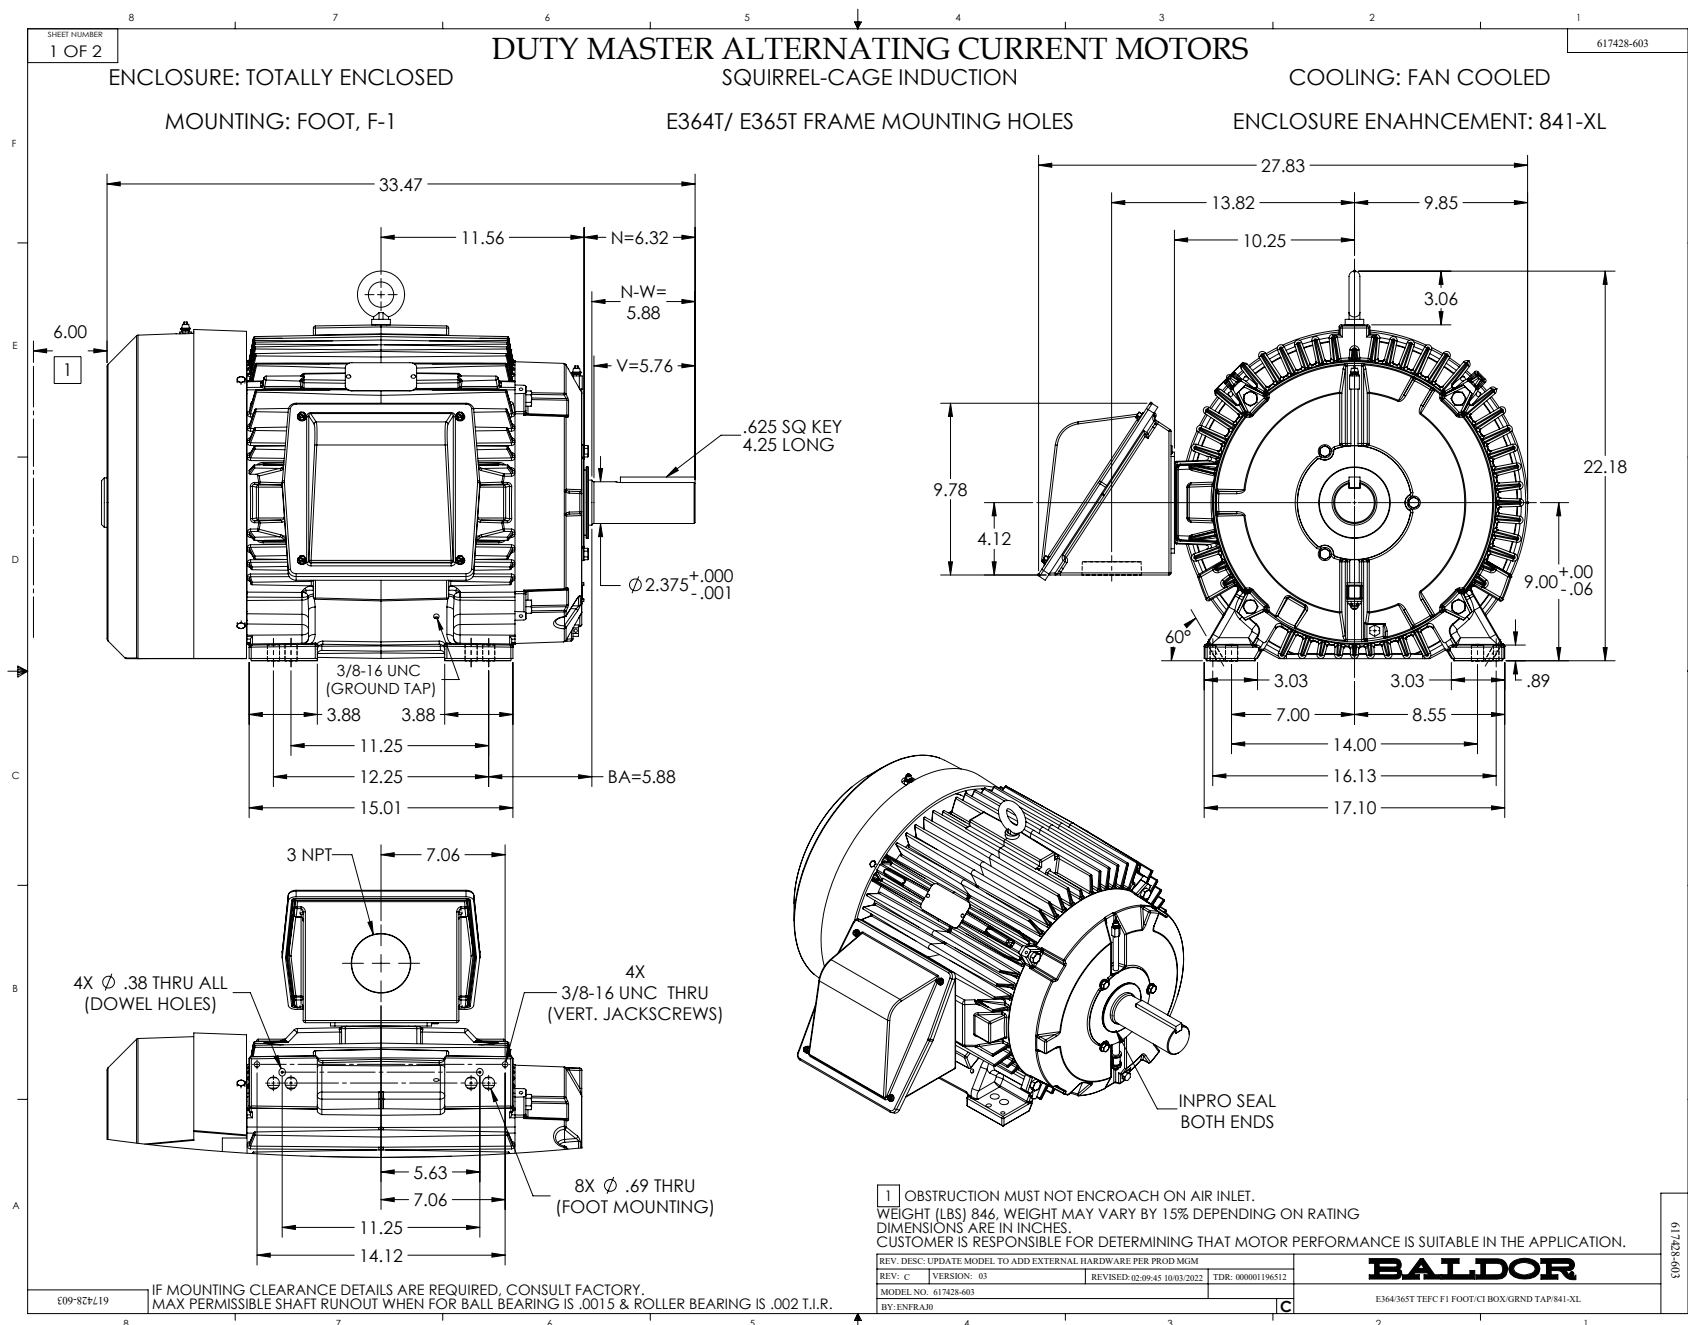

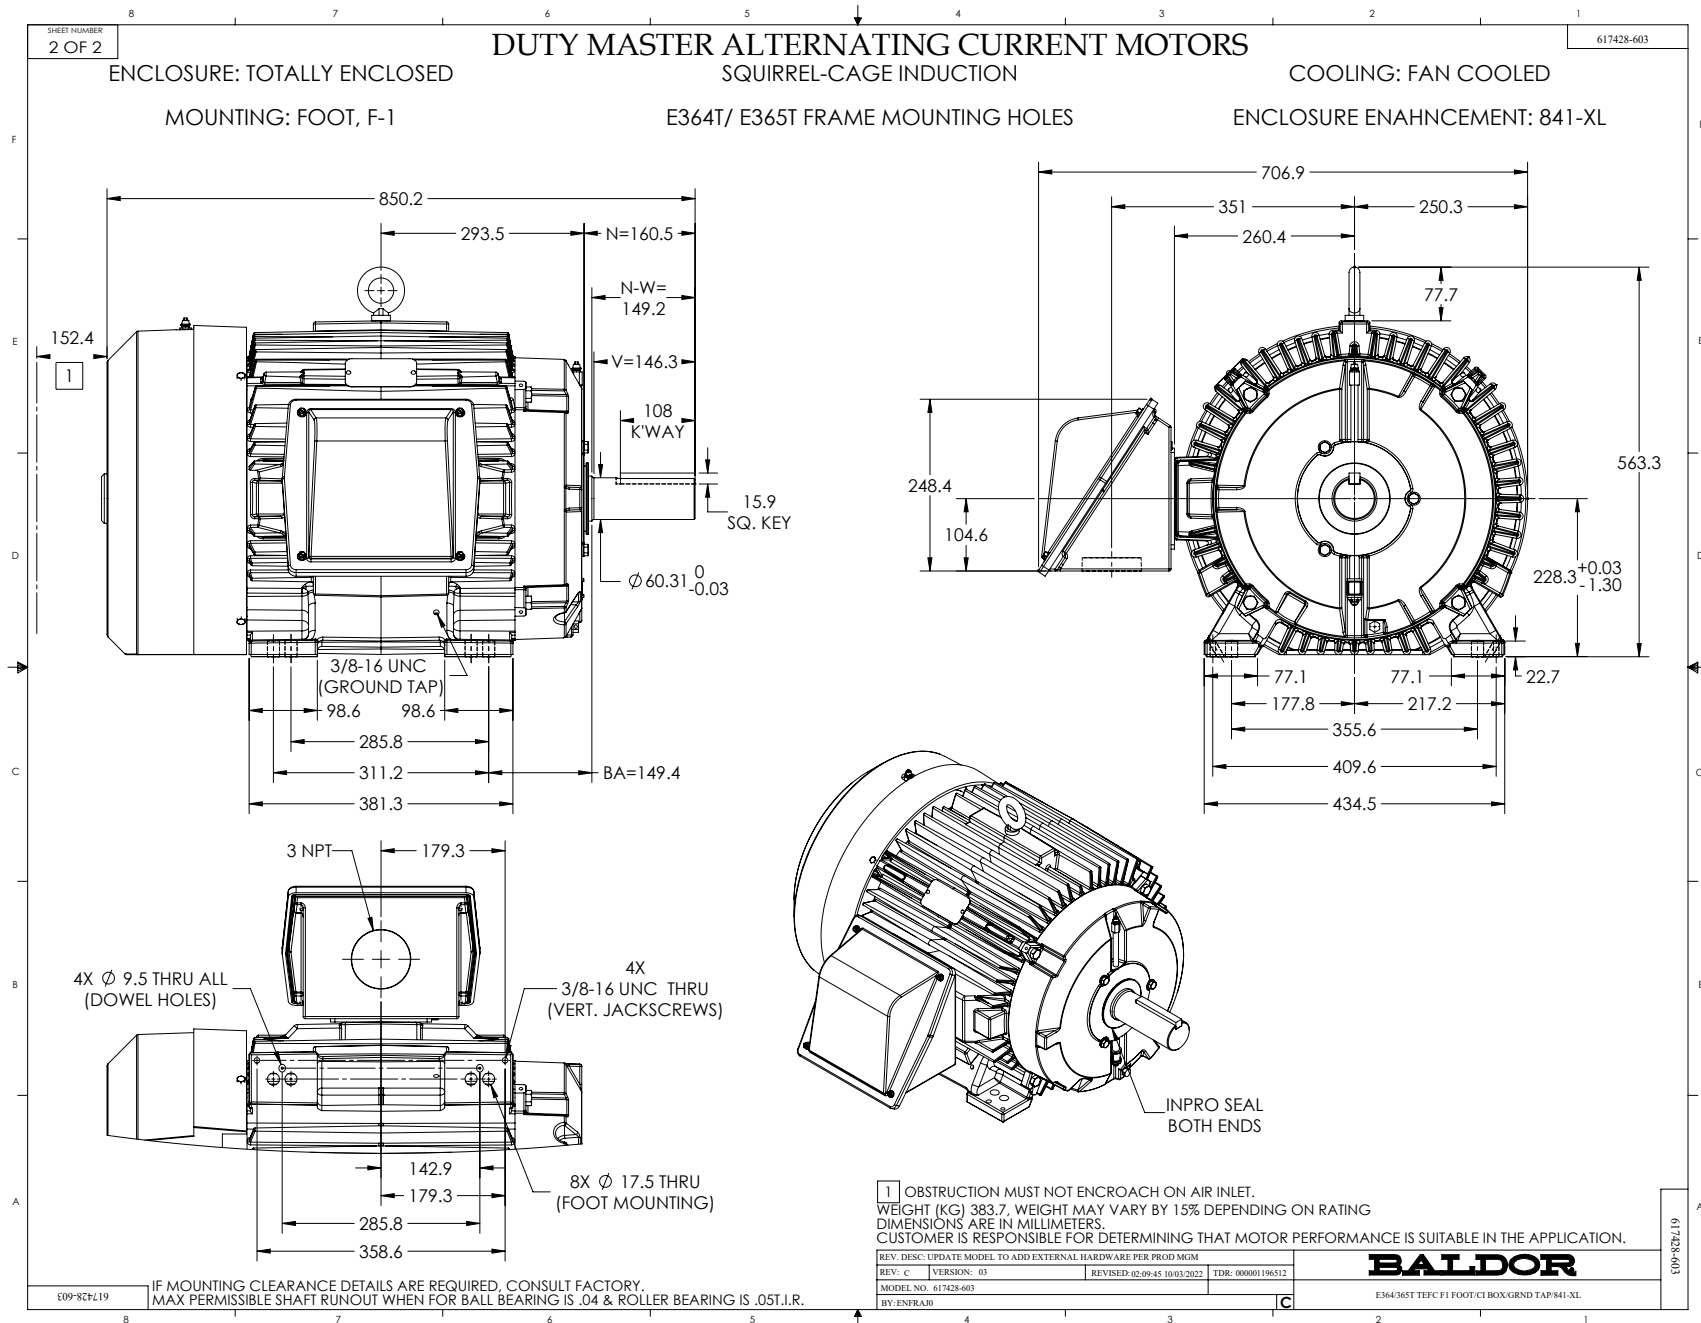

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

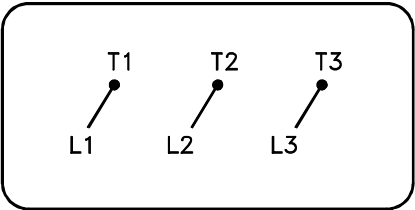

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1