



Customer information packet

ECP84413T-5

150HP, 3570RPM, 3PH, 60HZ, 445TS, A4478M, TEFC

Class - CLI GP A,B,C,D

Division - Division II

Specifications

Enclosure	TEFC
Frame	445TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	CL I GP A,B,C,D
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	150.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CCSA US UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	10-60
Current @ Voltage	131.000 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	131.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 1 AWG

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG4880
Layout	617434-659
Eff. date	12-10-2025
CD Diagram	416820-036
Poles	02
Leads	3#1
Proprietary	False
Created date	03-14-2022

Motor Standards	None
Motor Type	A4478M
Mounting Arrangement	F1
No Load Current	28.0 a
Number of Poles	2
Overall Length	41.22 IN
Power Factor	90
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3570 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP4566															
CAT NO	ECP84413T-5			SPEC NO.		A44-0000-4880									
HP	150	AMPS		131		VOLTS		575		DESIGN		B			
FRAME SIZE	445TS	RPM		3570		HZ		60	AMB		40	SF	1.15		
D.E. BRG.DATA	6313		O.D.E. BRG.DATA			6313		PH		3	DUTY		CONT	INSUL.CLASS	
D.E. BRG.	65BC03J30X			TYPE		ENCL		TEFC		CODE		G			
O.D.E. BRG.	65BC03J30X			POWER FACTOR				90		NEMA-NOM-EFFICIENCY				95	
3/4 LOAD EFF.	95.7	IP	56	MAX CORR KVAR				20		GUARANTEED EFFICIENCY				94.1	
TEMP CODE	T3	TEMP =		200											
CHP HZ	60-75	CT HZ	10-60		VT HZ		0-60								
INVERTER-TEMP-CODE	T3														
SER.NO.				MOTOR WEIGHT											


000613007EX				
CAT NO	ECP84413T-5	SPEC NO.	A44-0000-4880	
NO. ROTOR BARS	40	GREASE TYPE	POLYREX EM	
NO. SLOTS	48	NL AMPS AT RATED VOLTAGE		28
5 YEAR WARRANTY		WINDING RES @25 C	0.045	OHMS
MFG. DATE		SER.NO		


REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	445TS	150	P	3/60	3570	575
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
131	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
498934	418143-8BE	---	---	.0457		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	27.7	3600	6.89	0	
1/4	37.5	47.4	3593	63.9	92.9	
2/4	75.1	72.2	3585	81.7	95.3	
3/4	113	100	3578	87.8	95.7	
4/4	150	131	3570	89.9	95.6	
5/4	187	163	3562	90.4	95.2	
SPEED TORQUE						
LOCKED ROTOR	0		138	304	865	
PULL UP	288		110	242	797	
BREAKDOWN	3461		280	618	442	
FULL LOAD	3570		100	221	131	


AMPERES SHOWN FOR 575. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE

REMARKS: CALCULATED DATA
NEMA NOMINAL EFFICIENCY = 95.0 PCT.

BALDOR A MEMBER OF THE ABB GROUP	DR. BY G. R. WEBB	A-C MOTOR PERFORMANCE DATA A44WG4880-R001 ISSUE DATE 03/11/13
	CK. BY W. L. SMITH	
	APP. BY W. L. SMITH	
	DATE 03/11/13	

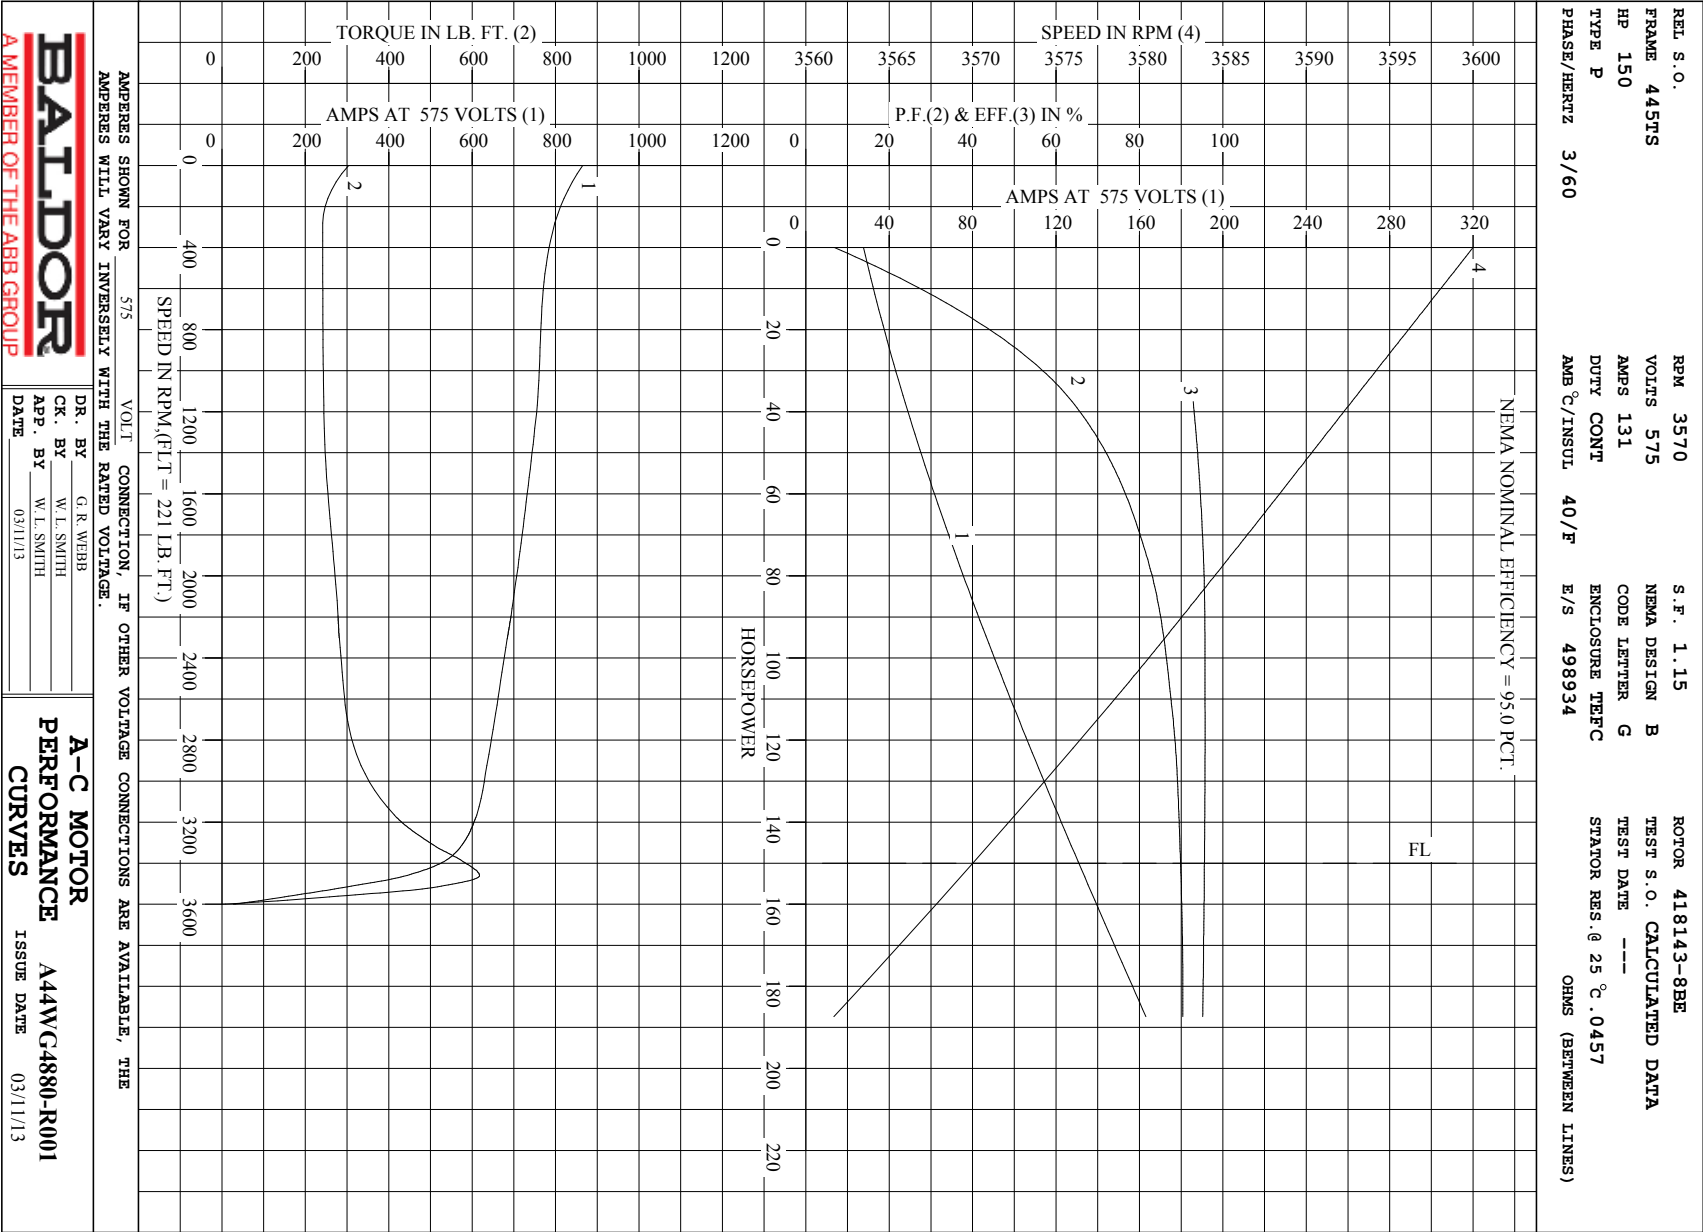

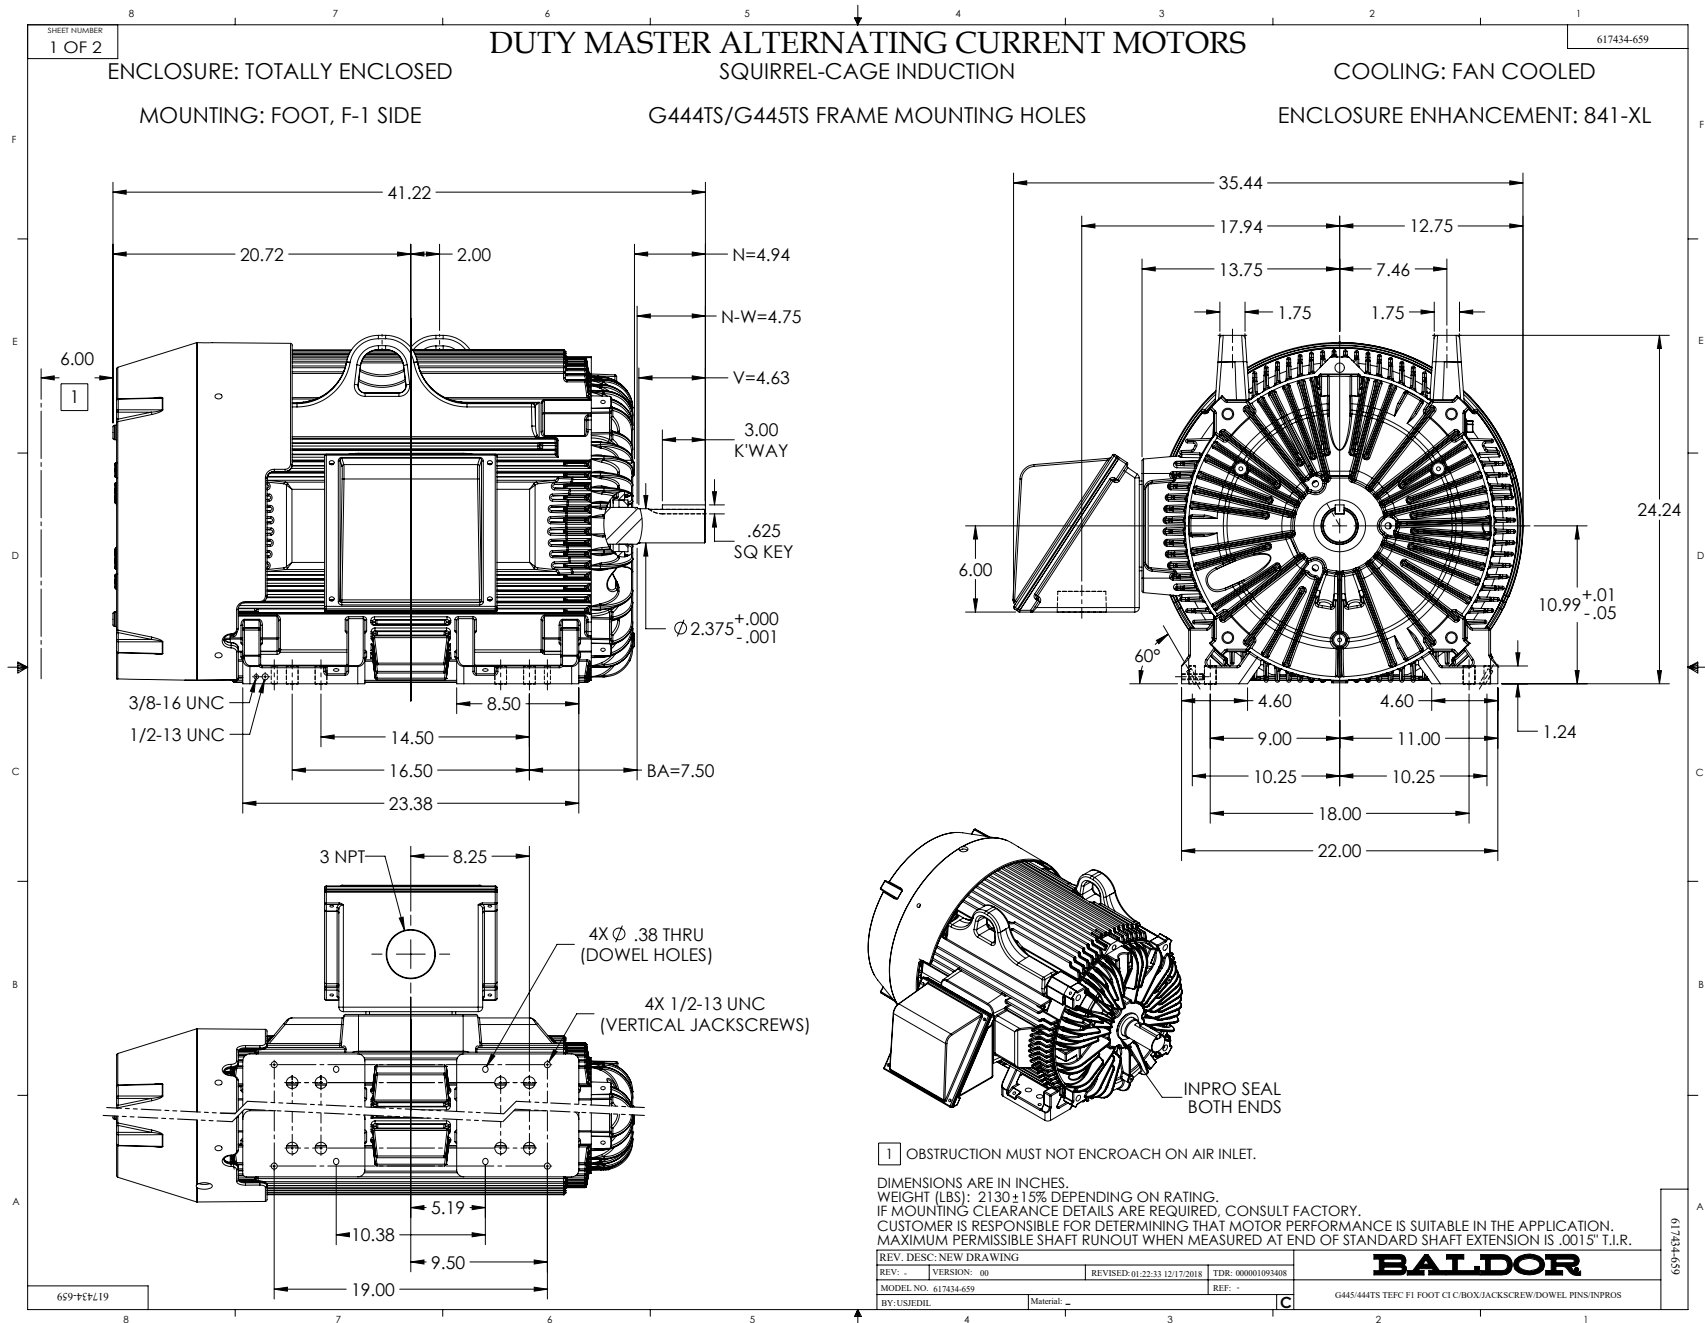

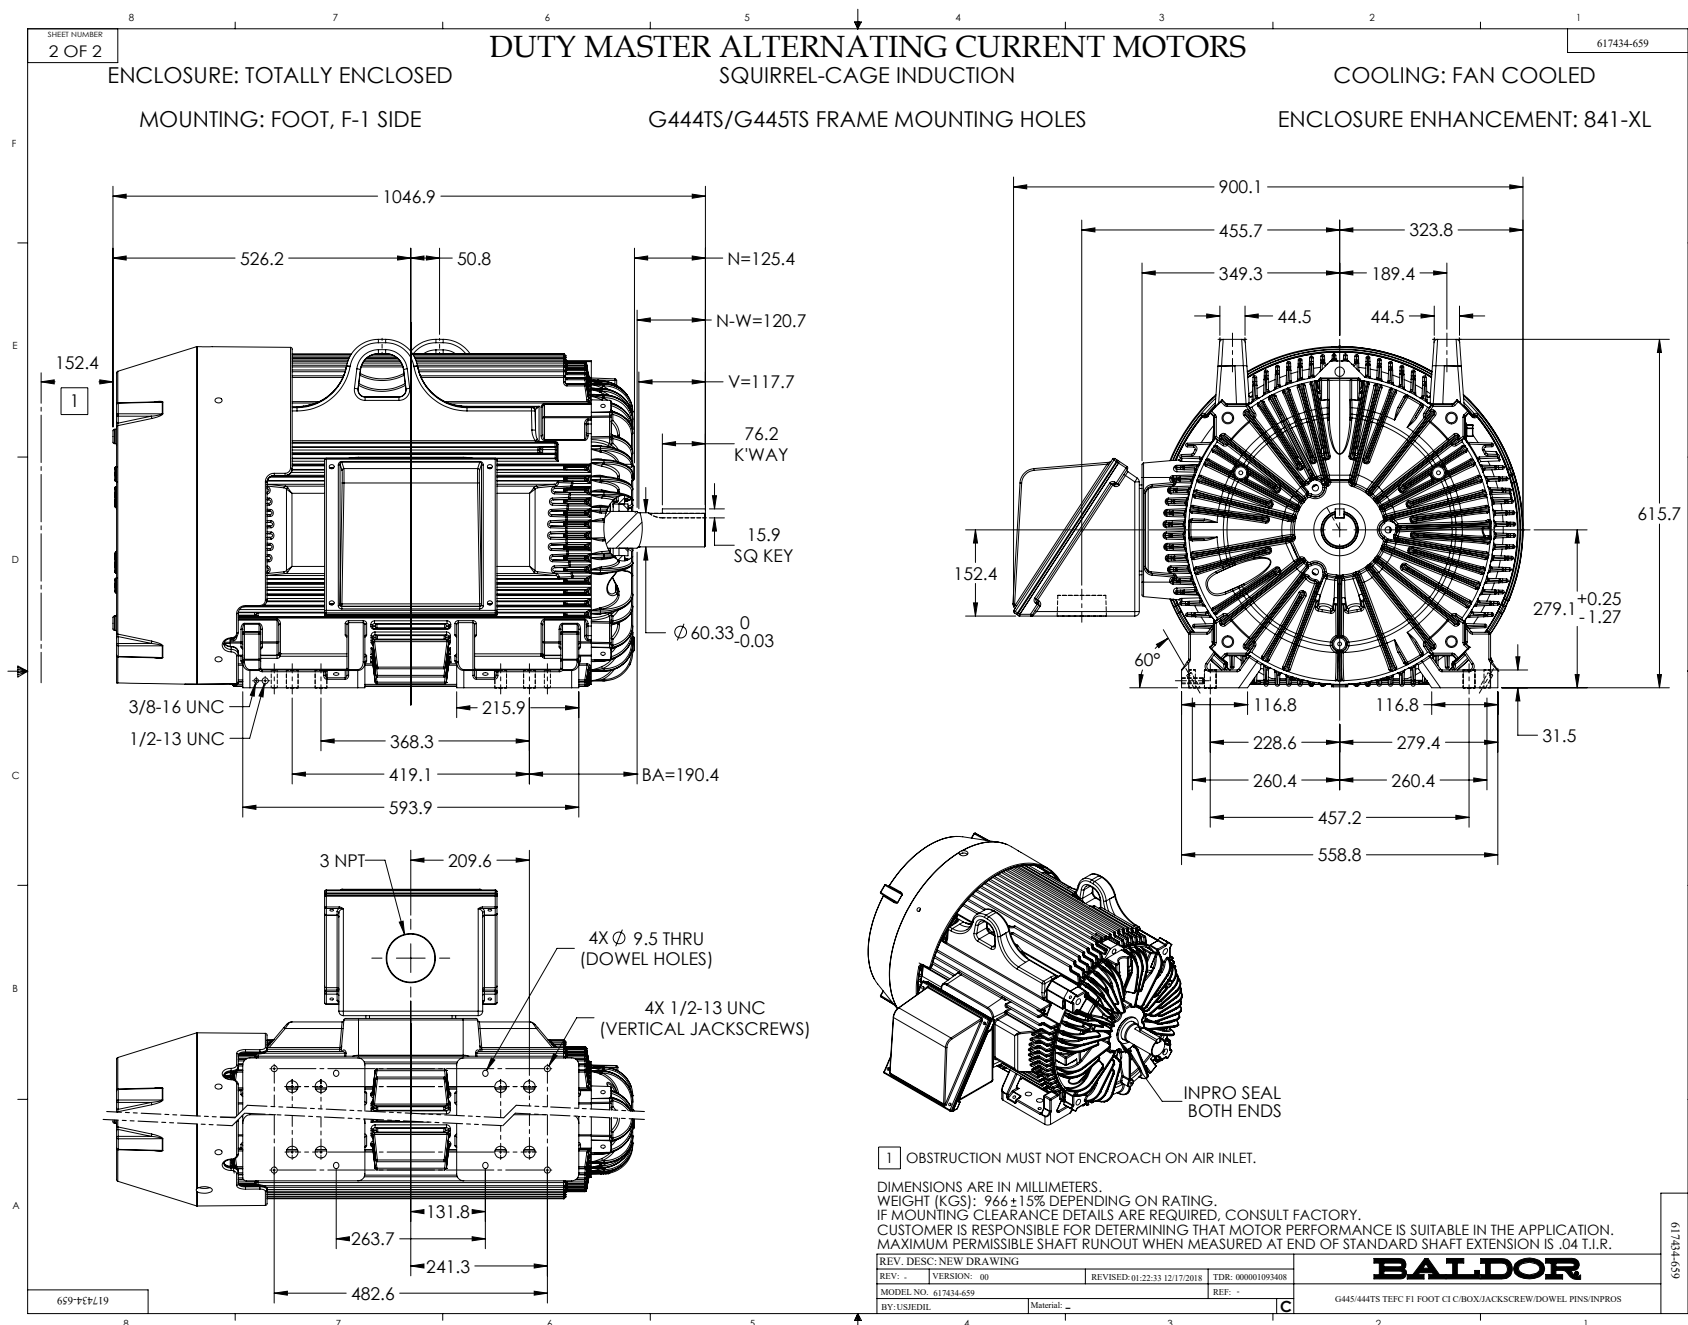

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED



(N.P. 1575-BA)

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1

416820-036