



Customer information packet

ECP844306T-4

300HP, 1190RPM, 3PH, 60HZ, L449T, TEFC, F1

Class - None

Division - Division II

Specifications

Enclosure	TEFC
Frame	L449T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Division II
Motor Letter Type	Three Phase
Output @ Frequency	300.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Constant Torque Speed Range	30-60
Current @ Voltage	340.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.8 %
Enclosure Modification	841
Feedback Device	NO FEEDBACK
Frame Prefix	L
Haz Area Temp Code	T3
Heater Indicator	No Heater
High Voltage Full Load Amps	340.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	IP56
KVA Code	G

Part detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG4970
Layout	617434-820
Eff. date	03-15-2024
CD Diagram	416820-036
Poles	06
Leads	3#2/0 (02 per group)
Proprietary	False
Created date	08-20-2019

Motor Lead Quantity/Wire Size	6 @ 2/0 AWG
Motor Standards	NEMA
Motor Type	A44208M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	60.47 IN
Power Factor	86
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None


Nameplate

NP2496L	
MOBIL POLYREX EM	


NP4566


CAT NO	ECP844306T-4		SPEC NO.		A44-8813-4970							
HP	300	AMPS	340		VOLTS		460		DESIGN		B	
FRAME SIZE	L449T	RPM	1190	HZ	60	AMB	40	SF	1.00			
D.E. BRG.DATA	6222	O.D.E. BRG.DATA			6318		PH	3	DUTY	CONT	INSUL.CLASS	F
D.E. BRG.	110BC02J30X		TYPE	ENCL	TEFC	CODE	G					
O.D.E. BRG.	90BC03J30X		POWER FACTOR			86		NEMA-NOM-EFFICIENCY			95.8	
3/4 LOAD EFF.	96.3	IP	56	MAX CORR KVAR			62.2	GUARANTEED EFFICIENCY			95	
TEMP CODE	T3	TEMP =	200									
CHP HZ	60-90	CT HZ	30-60	VT HZ	0-60							
INVERTER-TEMP-CODE	T3											
SER.NO.				MOTOR WEIGHT								


REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	L449T	300	P	3/60	1190	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
340	CONT	40/F	1.00	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
401936	418143-087-SE	---	---	.0136		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER % FACTOR	EFFICIENCY %	
NO LOAD	0	87.9	1200	4.08	0	
1/4	75.1	120	1197	62.1	94.5	
2/4	150	181	1195	80.8	96.2	
3/4	225	257	1192	85.2	96.3	
4/4	300	340	1189	85.9	96.0	
5/4	375	427	1186	86.1	95.5	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	171	2269	2227		
PULL UP	500	134	1769	1971		
BREAKDOWN	1148	250	3309	1248		
FULL LOAD	1189	100	1324	340		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA CALCULATED DATA XE MOTOR NEMA NOM EFF 95.8 PCT GUAR MIN EFF 95 PCT						
BALDOR			DR. BY CR. BY APP. BY DATE			
			CD T. KEIATI T. KEIATI 11/08/2013			
A MEMBER OF THE ABB GROUP			A-C MOTOR PERFORMANCE DATA A44WG4970-R001 ISSUE DATE 08/20/19			

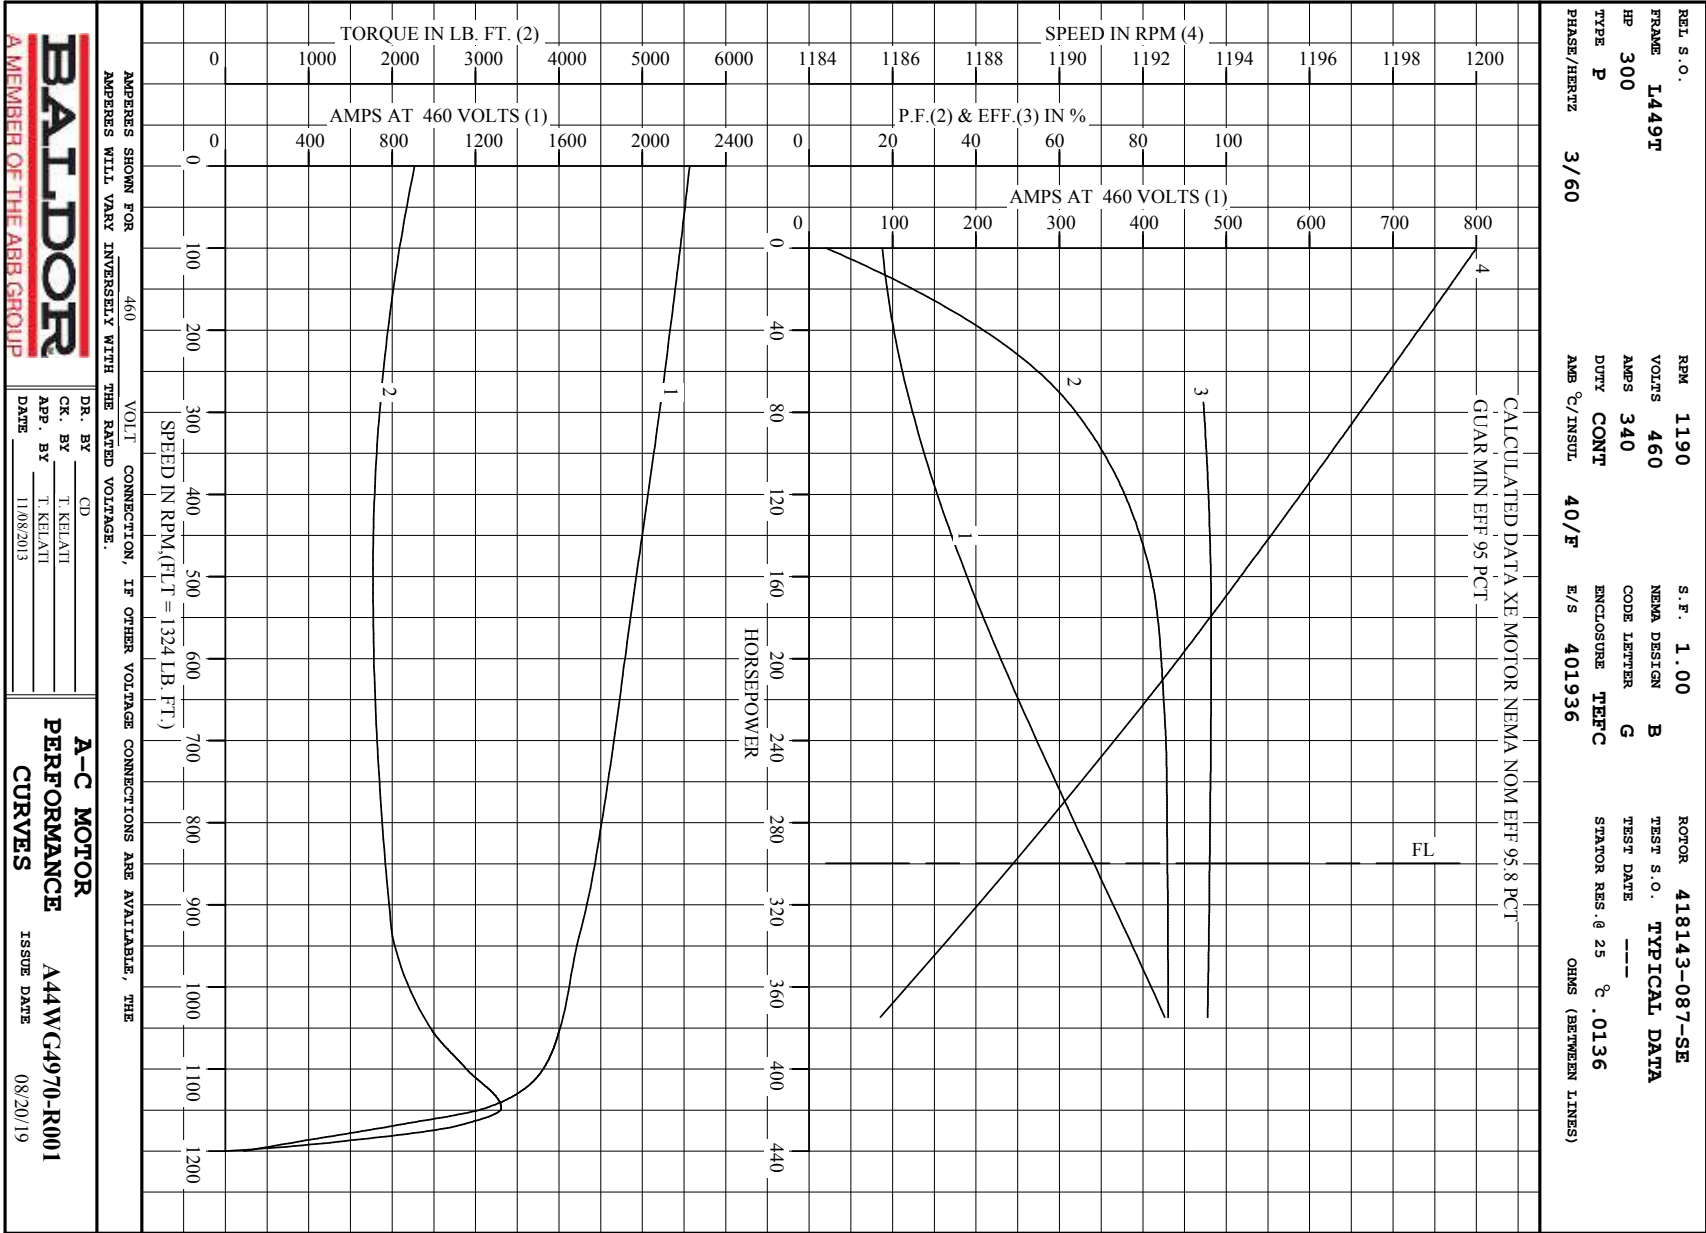

Printed on 8/20/19 14:26 @ bengap01.baldor.com

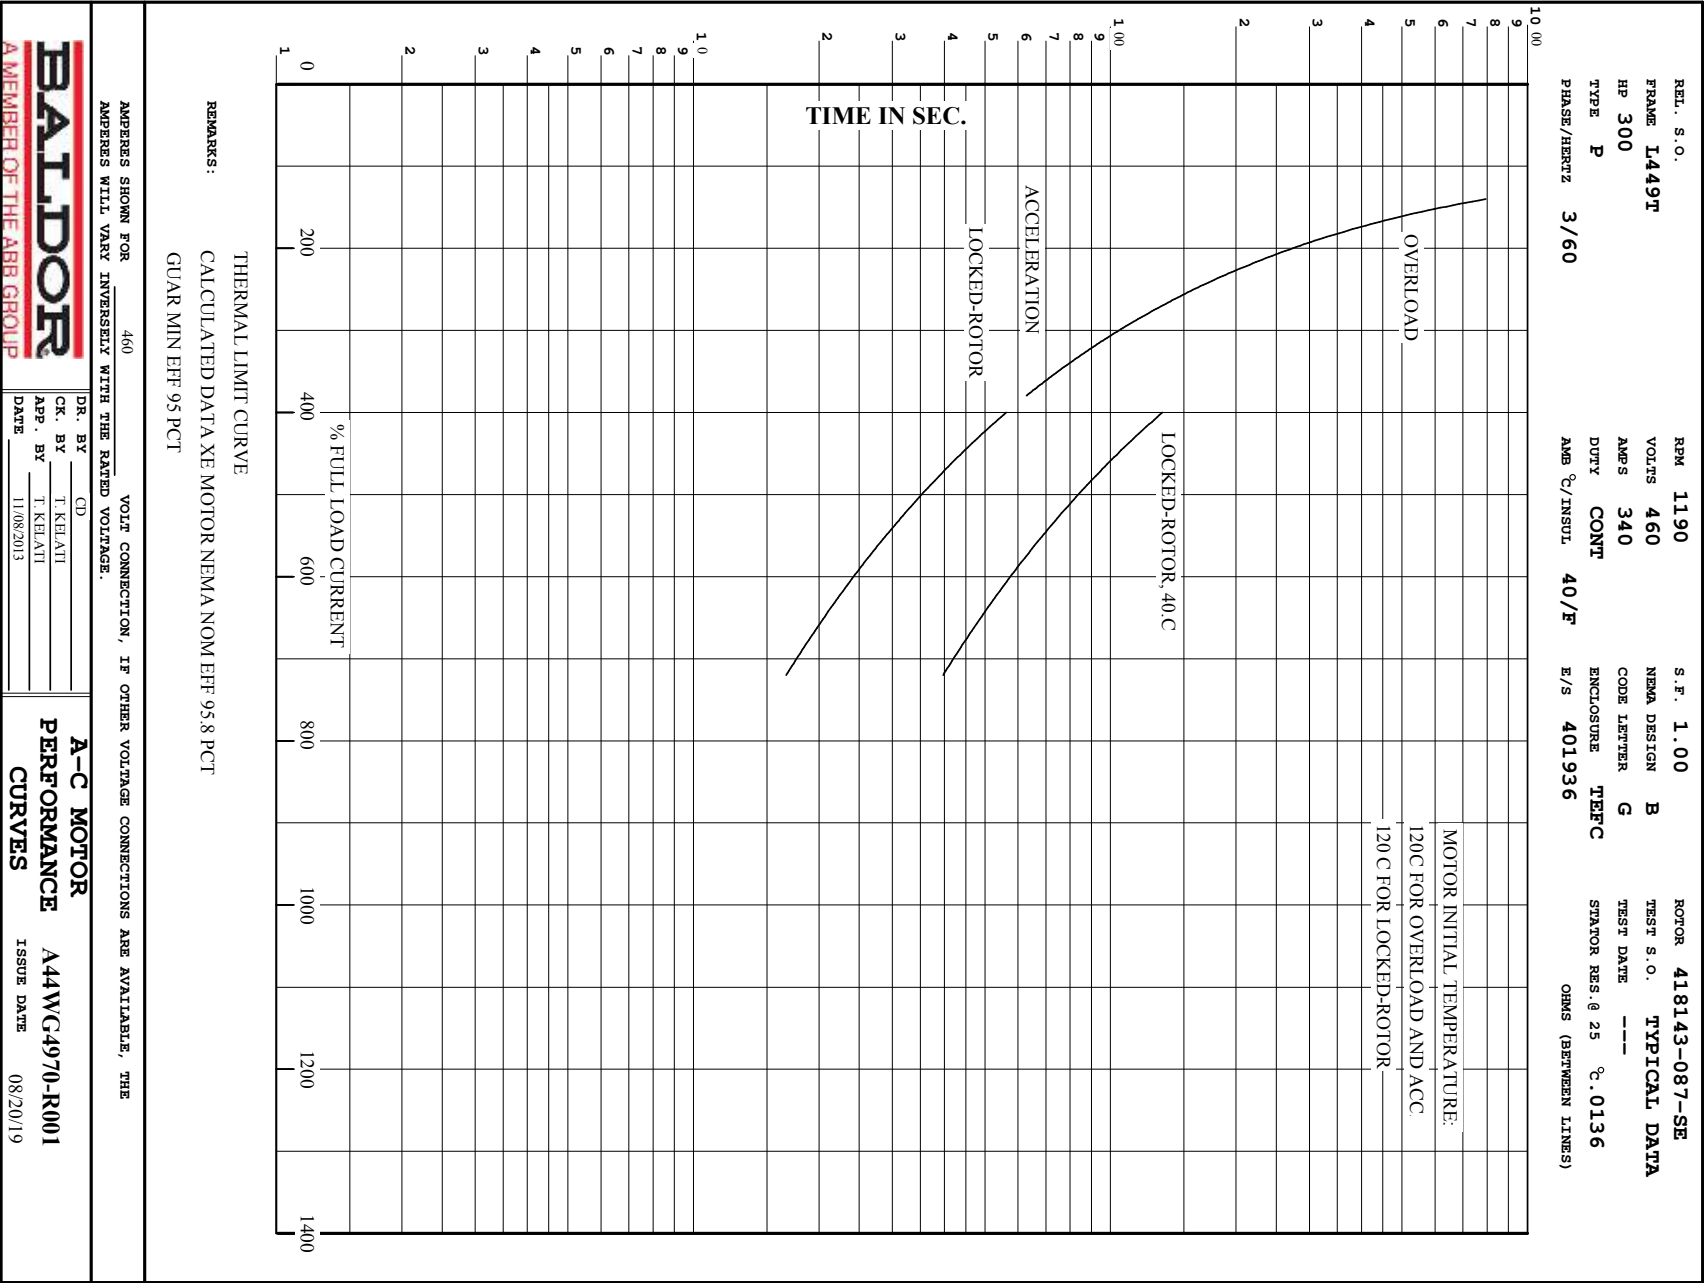

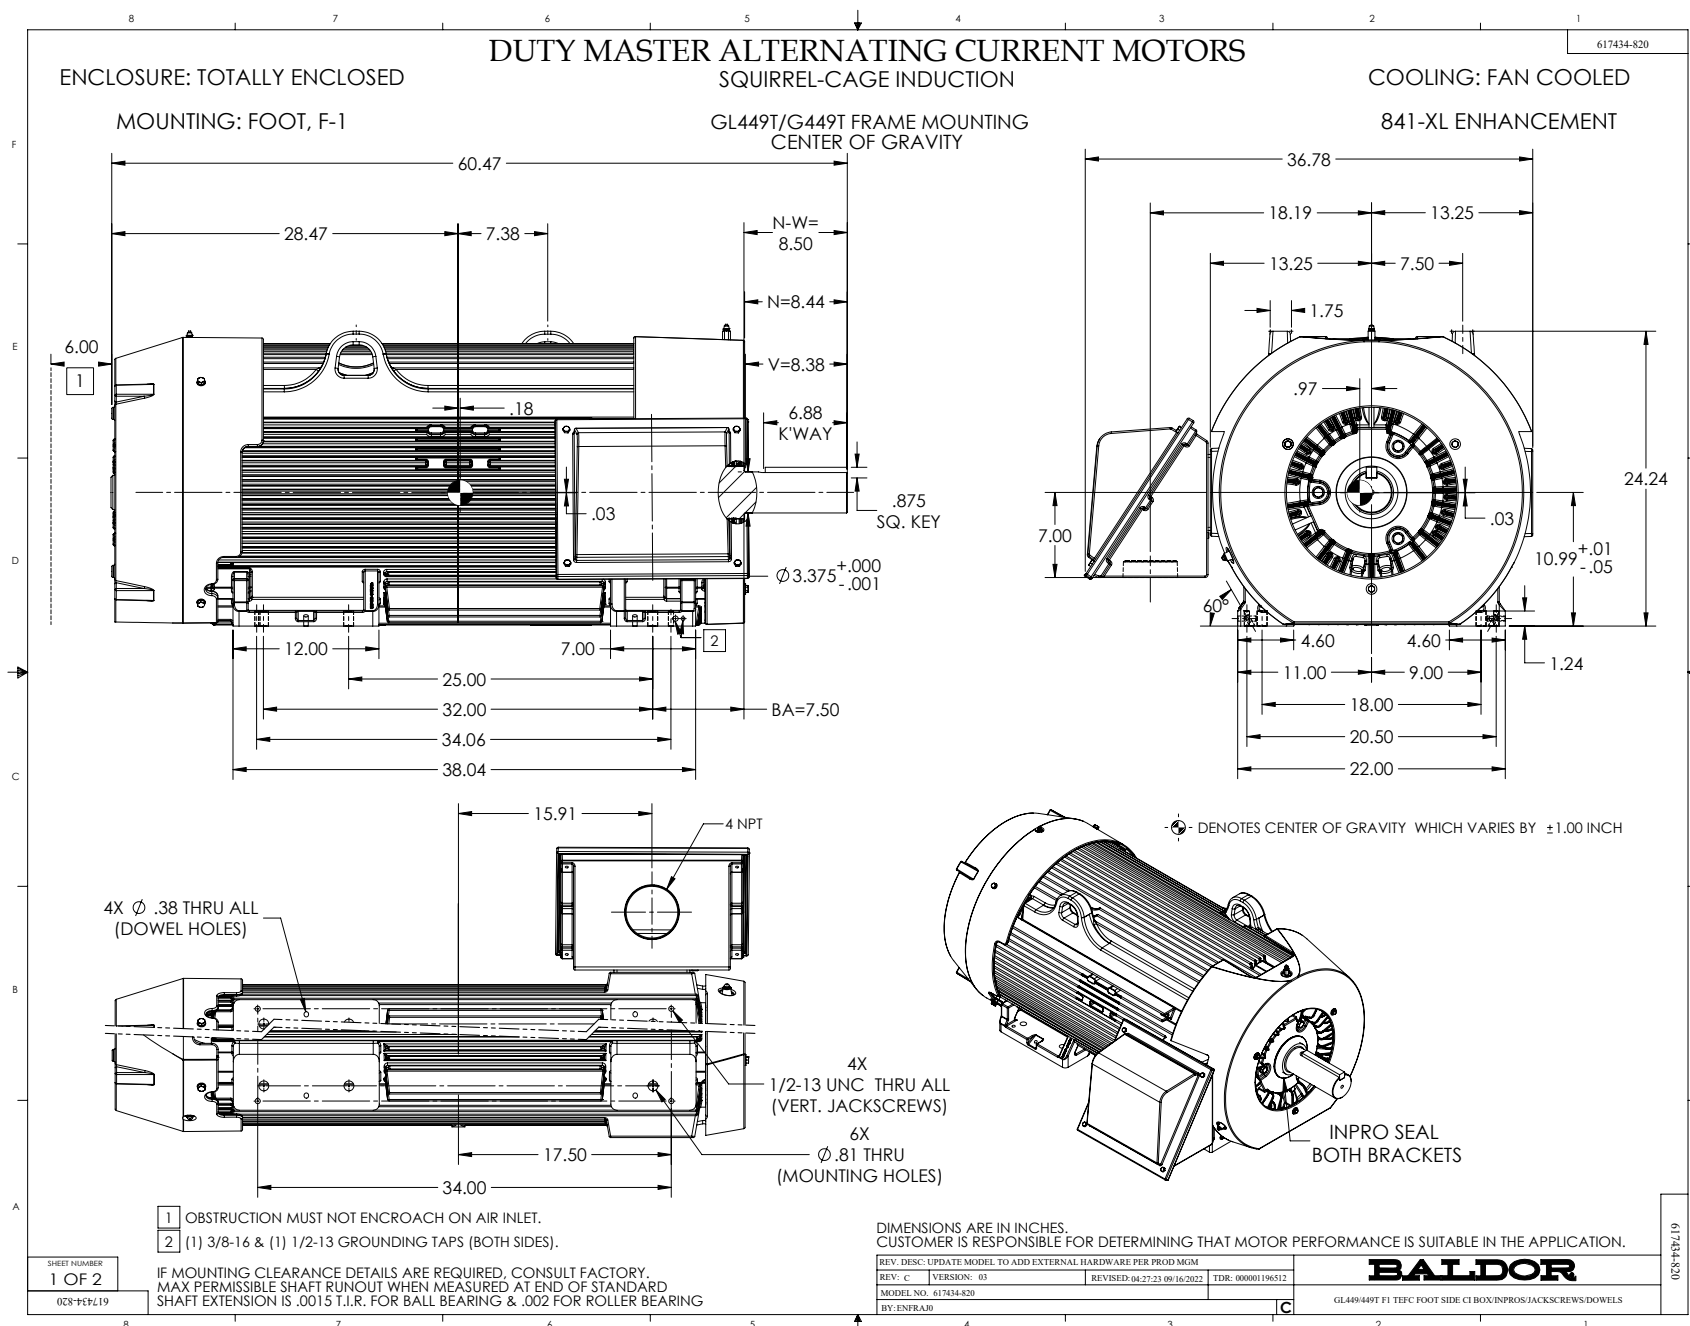

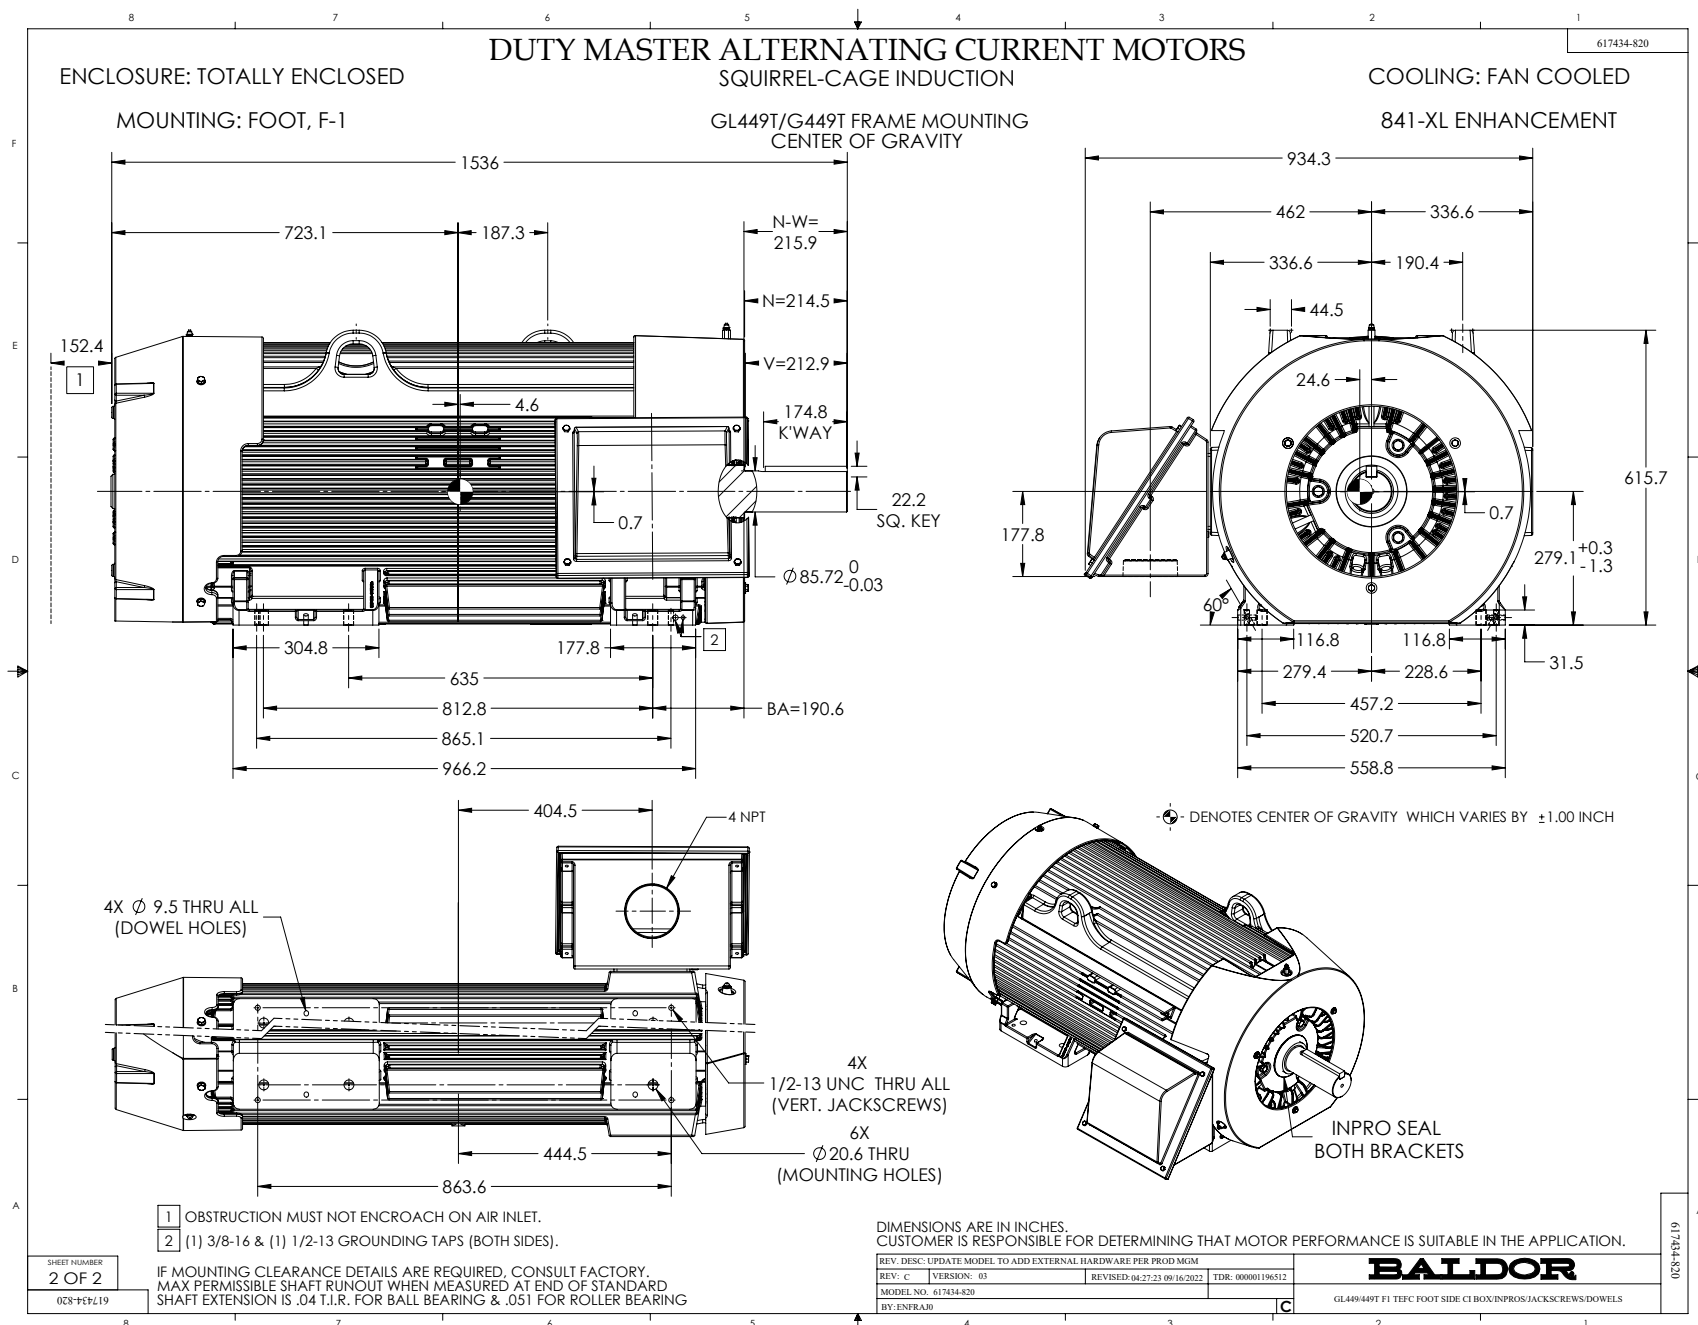

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED



(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225			BALDOR CONN DIAG - STANDARD 3 LEAD SH 1 of 1
REV. LTR: -	VERSION: 00	TDR: 000000538207	
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010	
MTL: -		BY: RAGRA	