



Customer information packet

ECR91506TR-4

150HP, 1190RPM, 3PH, 60HZ, 447T, A44112M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	447T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	150.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Mobil SHC 220 (Athens Only)
Constant Torque Speed Range	10-60
Current @ Voltage	180.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.8 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	180.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	No Lifting Lugs
Max Speed	3000 rpm
Motor Lead Quantity/Wire Size	6 @ 2 AWG

Part detail

Revision	H
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG5186
Layout	617427-355
Eff. date	04-08-2021
CD Diagram	416820-036
Poles	06
Leads	3#2 (02 per group)
Proprietary	False
Created date	02-06-2015


Motor Standards	NEMA
Motor Type	A44112M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	48.24 IN
Power Factor	82
Product Family	Crusher / Chipper
Pulley End Bearing Type	Roller
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

000613007PV

CAT NO	ECR91506TR-4			SPEC NO.		P44G1811						
HP	150	AMPS	180	VOLTS		460		DESIGN	A			
RPM	1190	RPM MAX	3000	HZ	60	AMB	40	SF	1.15			
D.E. BRG.DATA	NU222		O.D.E. BRG.DATA		6318		PH	3	DUTY	CONT	INSUL.CLASS	F
FRAME	447T	I.P.	55	TYPE	P	ENCL	TEFC	CODE	H			
POWER FACTOR	82	3/4 LOAD EFF.		95.7		NEMA NOM EFFICIENCY				95.8		
CHP HZ	60-90	CT HZ	10-60	VT HZ	6-60							
SER.NO.				MOTOR WEIGHT		2459						

NP2496L	
MOBIL SHC -220 GREASE	

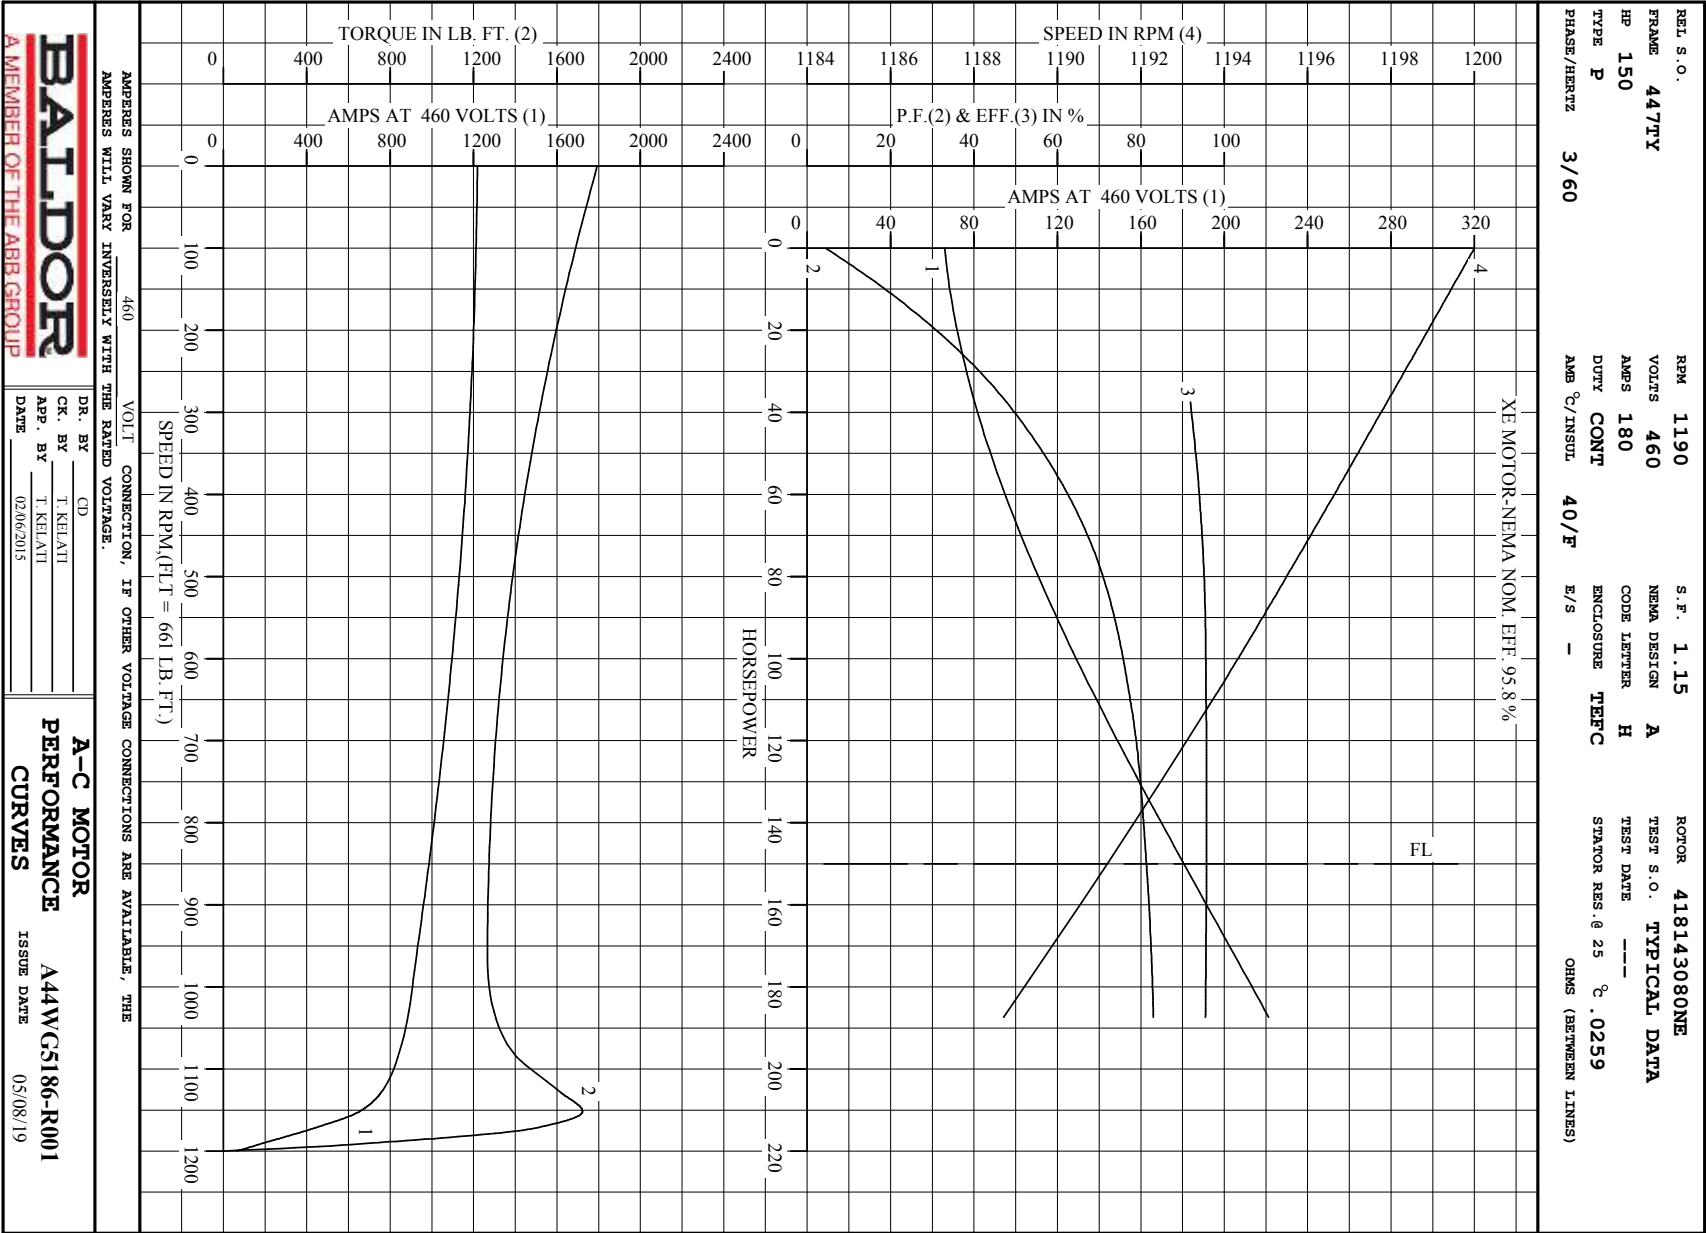

Printed on 5/8/19 10:26 @ bangap01.baldor.com

REL. S.O. 447TY
FRAME 447TY
HP 150
TYPE P
PHASE/HERTZ 3/60

RPM 1190
VOLTS 460
AMPS 180
DUTY CONT
AMB °C/INSUL 40/F
E/S -

S.F. 1.15
NEMA DESIGN A
CODE LETTER H
ENCLOSURE TEFC
E/S -

ROTOR 418143080NE
TEST S.O. TYPICAL DATA
TEST DATE ---
STATOR RES @ 25 °C. 0.259
OHMS (BETWEEN LINES)

10.00
9
8
7
6
5
4
3
2
1

OVERLOAD
LOCKED-ROTOR, 40 C
LOCKED-ROTOR
ACCELERATION

1.00
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0

TIME IN SEC.

0 200 400 600 800 1000 1200 1400

% FULL LOAD CURRENT

1.0
0.9
0.8
0.7
0.6
0.5
0.4
0.3
0.2
0.1
0

THERMAL LIMIT CURVE

REMARKS: XE MOTOR-NEMA NOM. EFF. 95.8 %

AMPERES SHOWN FOR 460
AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE

DR. BY T. KELATI
CK. BY T. KELATI
APP. BY T. KELATI
DATE 02/06/2015

A-C MOTOR
PERFORMANCE CURVES
A44WG5186-R001
ISSUE DATE 05/08/19

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION


ENCLOSURE: TOTALLY ENCLOSED

FRAME G447T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 445T FRAME MOUNTING HOLES

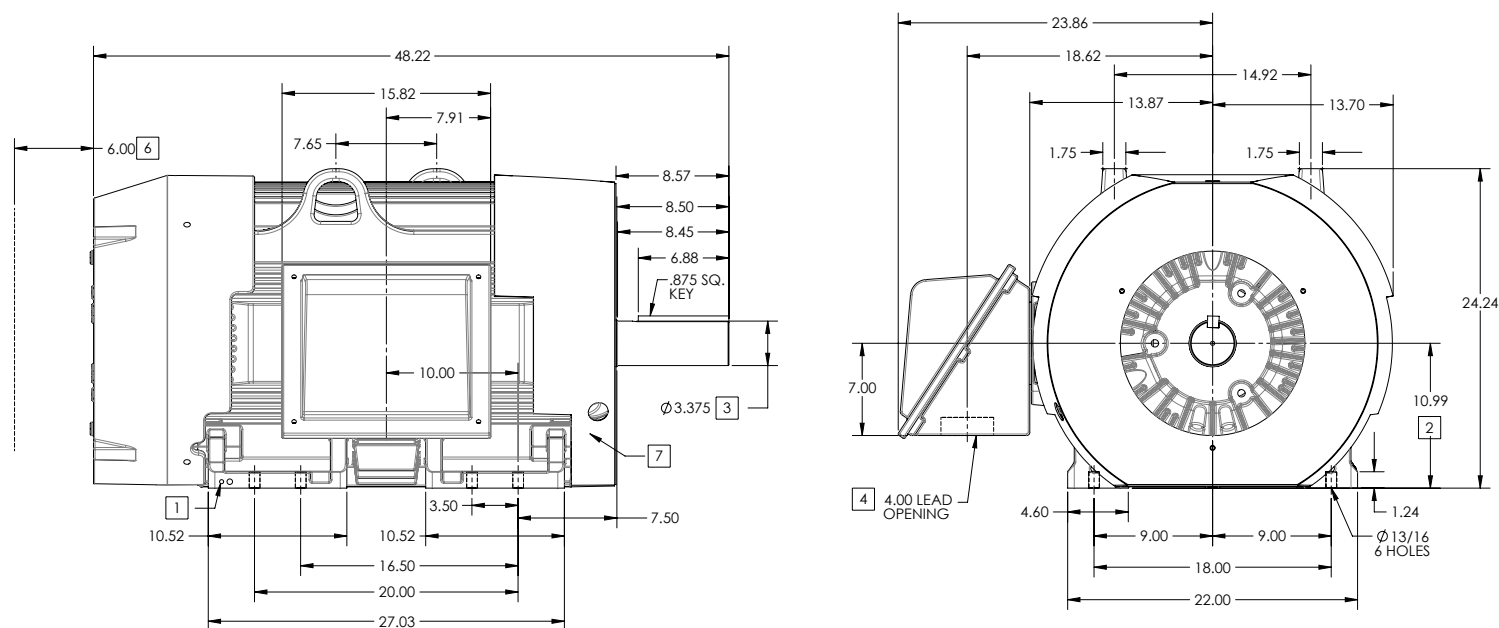

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES $\pm .00, -.06$
3. VARIES $\pm .000, -.001$
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET.
7. AIR DEFLECTOR INSTALLED WHEN REQUIRED.

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .003" T.I.R. TO 5 INCH DIA.

5 WEIGHT (LBS): 2515

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN INCHES; SEE SHEET 2 FOR DIMENSIONS IN MILLIMETERS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
1 OF 2
SS5-1747-119

REV. DESC: NEW ISSUE	VERSION: 00	REVISED: 04/29/05 (02/09/2015)	TDR: 000000884510
MODEL NO. 617427-355	REF:		
BY: RAGGDM	Material:		

BALDOR

G447T/445T STD FOOTED SIDE/CENTER C/B WITH AIR DEFLECTOR

617427-355

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION



ENCLOSURE: TOTALLY ENCLOSED

FRAME G447T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 445T FRAME MOUNTING HOLES

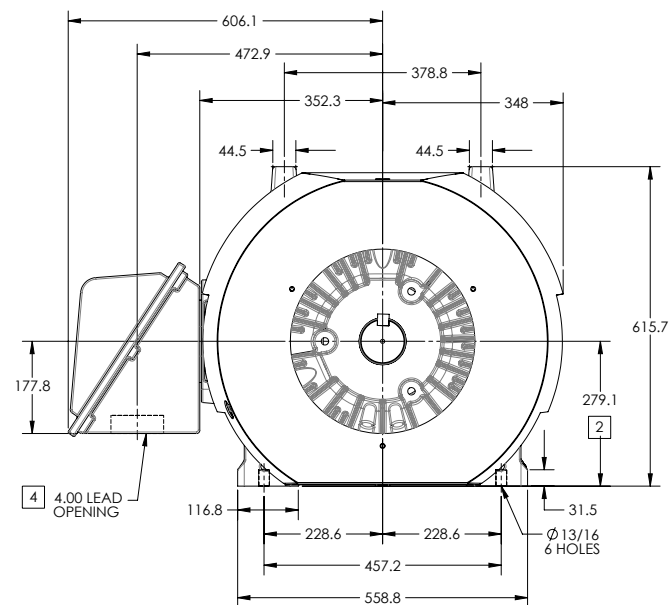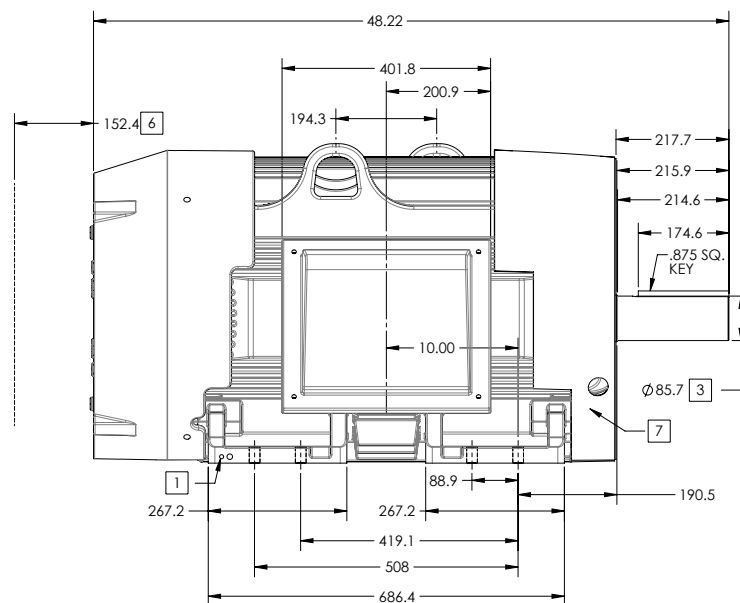

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES $\pm .00$, $-.06$
3. VARIES $\pm .000$, $-.001$
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NO ENCROACH ON AIR INLET.
7. AIR DEFLECTOR INSTALLED WHEN REQUIRED.

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .08 MM T.I.R. TO 127 MM DIA.

5 WEIGHT (KGS): 1140

DRIVE END AIR DEFLECTOR IS ONLY INCLUDED WHEN NECESSARY.

DIMENSIONS ARE IN MILLIMETERS; SEE SHEET 1 FOR DIMENSIONS IN INCHES

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.


REV. DESC: NEW ISSUE			
REV: -	VERSION: 00	REVISED: 04/29/05 (02/09/2015)	TDR: 000000884510
MODEL NO. 617427-355		REF:	
BY: RAGGDM	Material:		

BALDOR

G447T/445T STD FOOTED SIDE/CENTER C/B WITH AIR DEFLECTOR

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

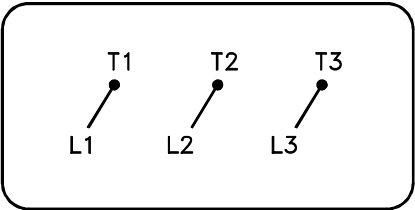

(N.P. 1575-BA)

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682	REVISED: 11: 54: 06 04/30/2010	
MTL: -	BY: RAGRA	

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1

416820-036