



Customer information packet

ECR9156T

15HP, 1175RPM, 3PH, 60HZ, 284T, 1068M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	284T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSA US CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	19.400 A @ 460.0 V 38.800 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features

Part detail

Revision	R
Type	AC
Mech. spec.	10J907
Base	
Status	PRD/A
Elec. spec.	10WGZ350
Layout	10LYJ907
Eff. date	08-01-2023
CD Diagram	CD0180
Poles	06
Leads	9#12
Proprietary	False
Created date	01-08-2015

Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	19.4 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	1800 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1068M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	28.00 IN
Power Factor	78
Product Family	Super-E Chemical Processing
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1175 rpm
Speed Code	Single Speed
Starting Method	Direct on line

Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3293

CAT.NO.	ECR9156T		P/N					ENCLOSURE		TEFC				
SPEC.	10J907Z350G1		CC	010A	FRAME		284T		S/N					
HP	15		CLASS		F	HZ	60	DES	A					
RPM	1175	RPM MAX	1800		PH		3	KVA-CODE		H				
VOLT	230/460				I.P.		55							
AMP	38.8/19.4		SER.F.		1.25		PF	78	ODE BRG		6311	DE BRG	6312	
RATING	40C AMB-CONT		NEMA-NOM-EFF				91.7	GREASE		POLYREX EM				
HTR-VOLTS	HTR-AMPS		HTR-WATTS			INV.TYPE								
	SFA 48/24													
			C HP FR		60		C HP TO		90					
			CT HZ FROM				6		CT HZ TO		60			
			MOTOR WEIGHT				491		VT HZ FROM		6		VT HZ TO	60

AC Induction Motor Performance Data

Record # 48598

Typical performance - not guaranteed values

Winding: 10WGZ350-R001			Type: 1068M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		15	Full Load Torque		66.4 LB-FT			
Volts		230/460	Start Configuration		direct on line			
Full Load Amps		38.8/19.4	Breakdown Torque		183 LB-FT			
R.P.M.		1175	Pull-up Torque		138 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		162 LB-FT		
NEMA Design Code		A	KVA Code	H	Starting Current		128 A	
Service Factor (S.F.)		1.25	No-load Current		8.23 A			
NEMA Nom. Eff.		91.7	Power Factor		78	Line-line Res. @ 25°C		0.566 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		41°C	
S.F. Amps		48/24	Temp. Rise @ S.F. Load		56°C			
			Locked-rotor Power Factor		29.1			
			Rotor inertia		8.33 LB-FT2			

Load Characteristics 460 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	43	64	74	78	80	80	81
Efficiency	87.3	91.5	92.4	92.3	91.2	90.5	90.9
Speed	1195	1191	1186	1182	1176	1170	1170
Line amperes	9.33	12	15.4	19.4	24	29	23.9


ABB Motors and Mechanical Inc.


WINDING # 10WGZ350

Typical performance - not guaranteed values.

15 HP 3 PH 60 HZ 1175 RPM 460 V 1068M

TORQUES (LB-FT): PO=183 PU=138 LR=162 LRA=128

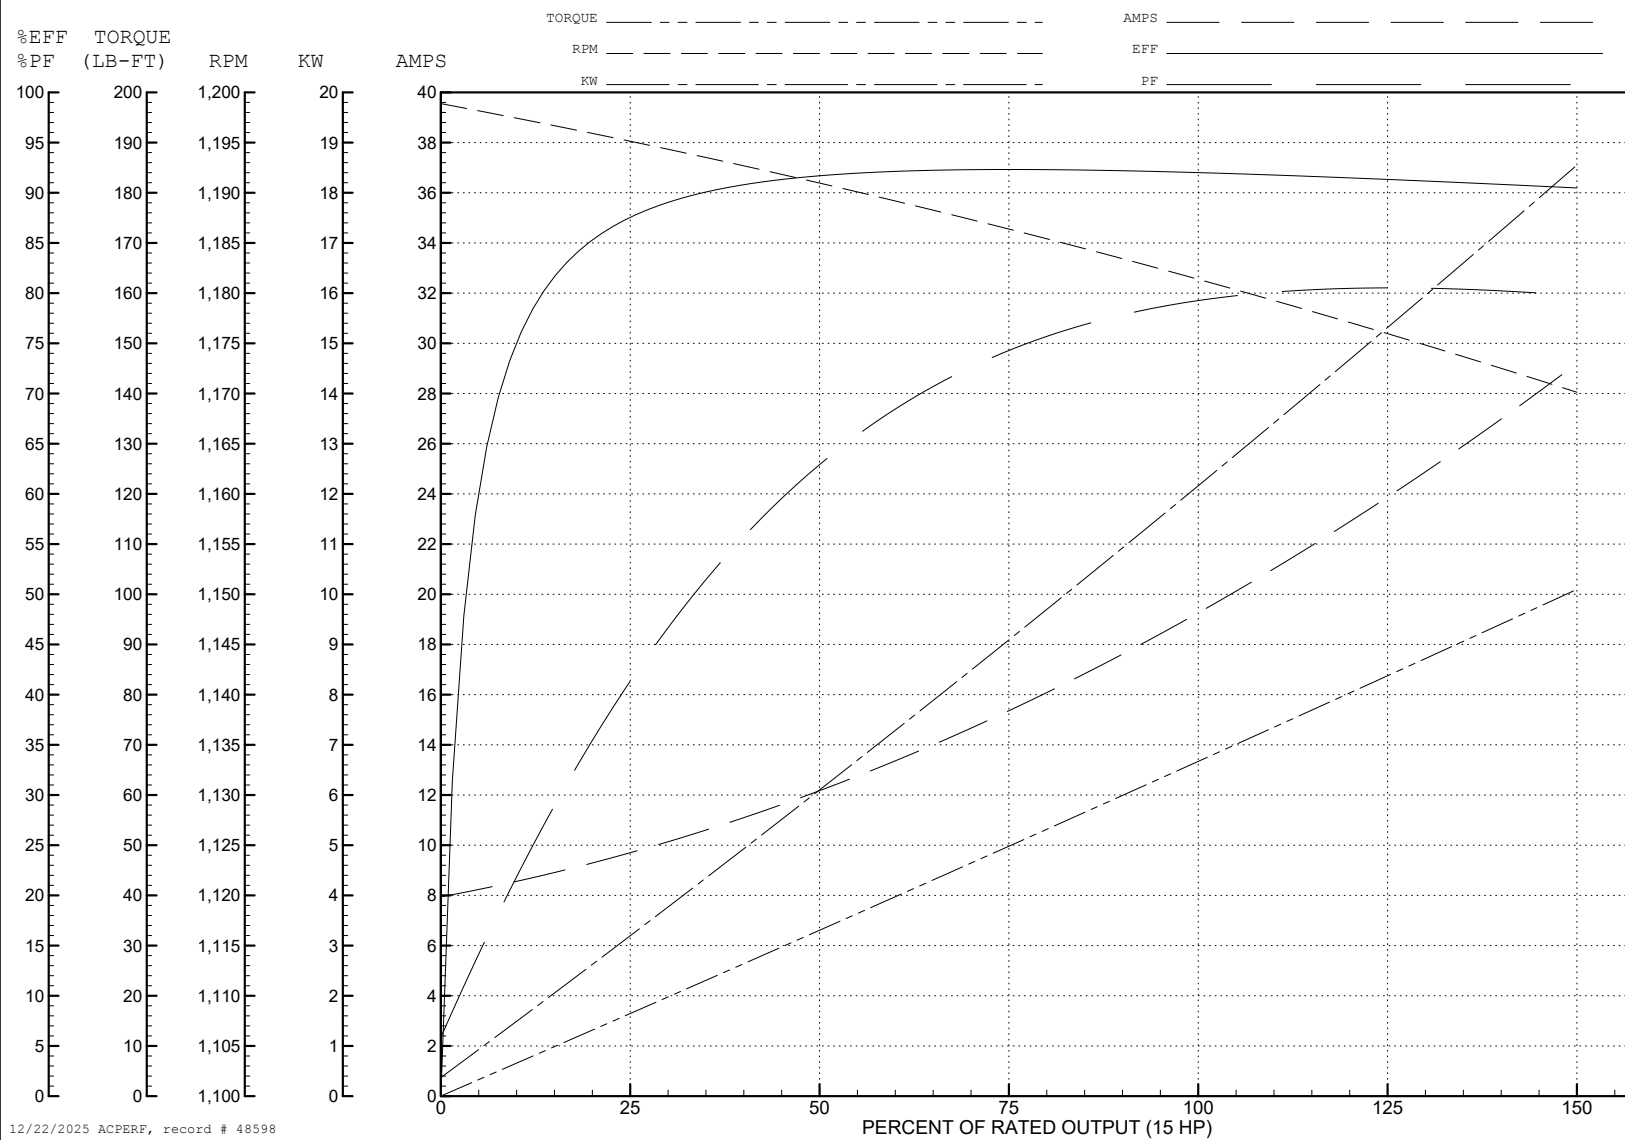

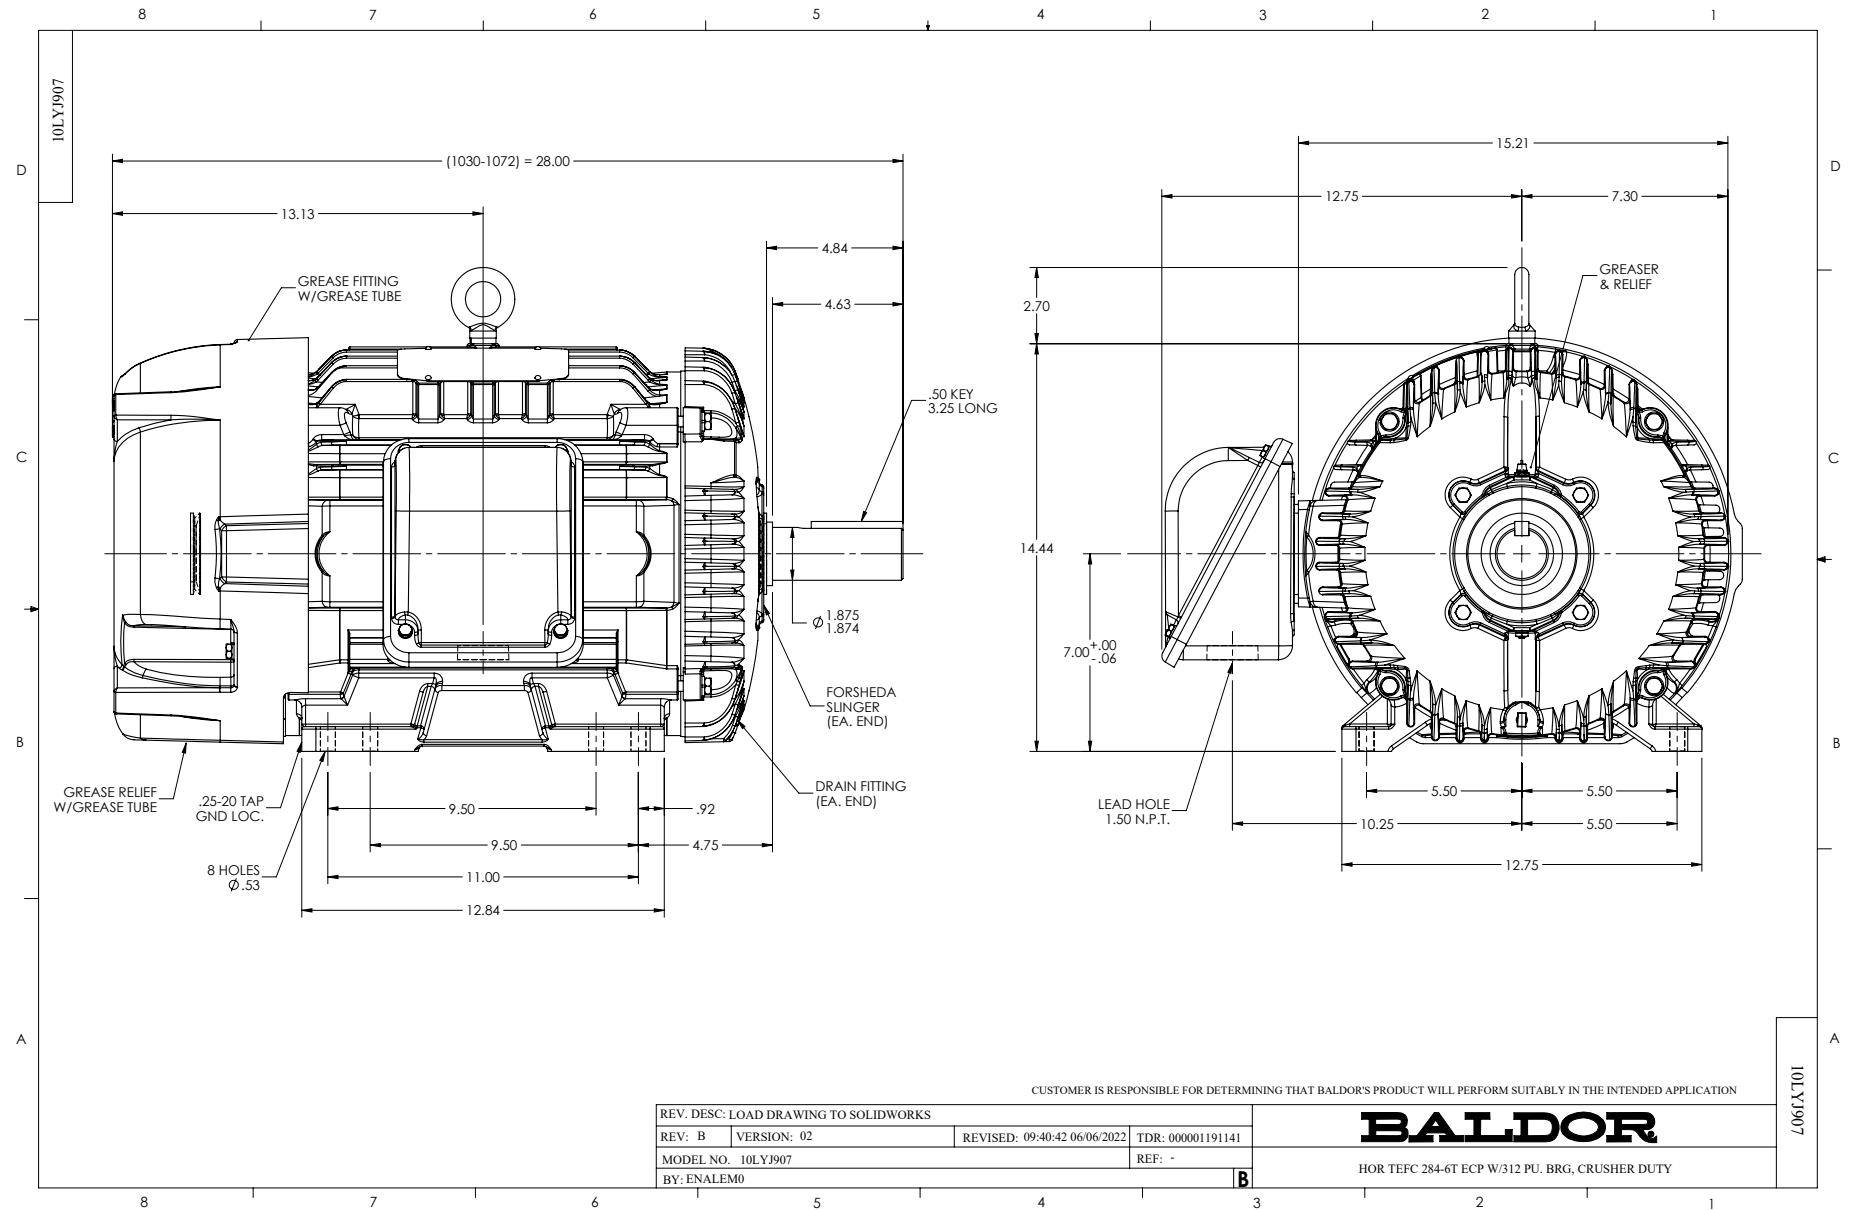

CD0180

LOW VOLTAGE
(2D)HIGH VOLTAGE
(1D)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10:25:29 02/19/2019

BY: ENBRIRO

MTL: —



BALDOR - RELIANCE®

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1