

BALDOR® • RELIANCE®

Customer information packet

ECR9604TR

60HP, 1785RPM, 3PH, 60HZ, 364T, A3662M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	364T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Mobil SHC 220 (Athens Only)
Constant Torque Speed Range	6-60
Current @ Voltage	71.000 A @ 460.0 V 142.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	71.0 a
Insulation Class	F
Inverter Code	Inverter Ready

Part detail


Revision	Q
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A36WG4074
Layout	617428-034
Eff. date	02-13-2025
CD Diagram	416820-002
Poles	04
Leads	3#4,6#6
Proprietary	False
Created date	02-03-2015

KVA Code	H
Lifting Lugs	No Lifting Lugs
Max Speed	2700 rpm
Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A3662M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	33.49 IN
Power Factor	83
Product Family	Crusher / Chipper
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.25
Shaft Diameter	2.374 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate



NP3980LUA

CAT #	ECR9604TR			SER				CC	010A	
SPEC	P36G3503			RATING	40C AMB-CONT					
Hz	VOLTS		AMPS	RPM	HP	CODE	SF	DES	PF	NEMA NOM. EFF
60	230/460		142/71	1785	60	H	1.25	A	83 %	95 %
	-								%	%
PH	3	CL	F	MAX CORR KVAR	17.3					
BRG	DE	NU313	ODE	6313	ENCL	TEFC	FR	364T		55
GREASE		MOBIL SHC 220			MTR WT		892	LBS		
USABLE AT		50HZ 50HP 190/380V 144/72A			SF1.0					
INV READY		1.0 SF VPWM	CT	10-60	Hz	6:1	VT	0-60	Hz	1000:1
MAX RPM		2700	SFA 178/89						CHP	60-90 Hz
										1.5:1

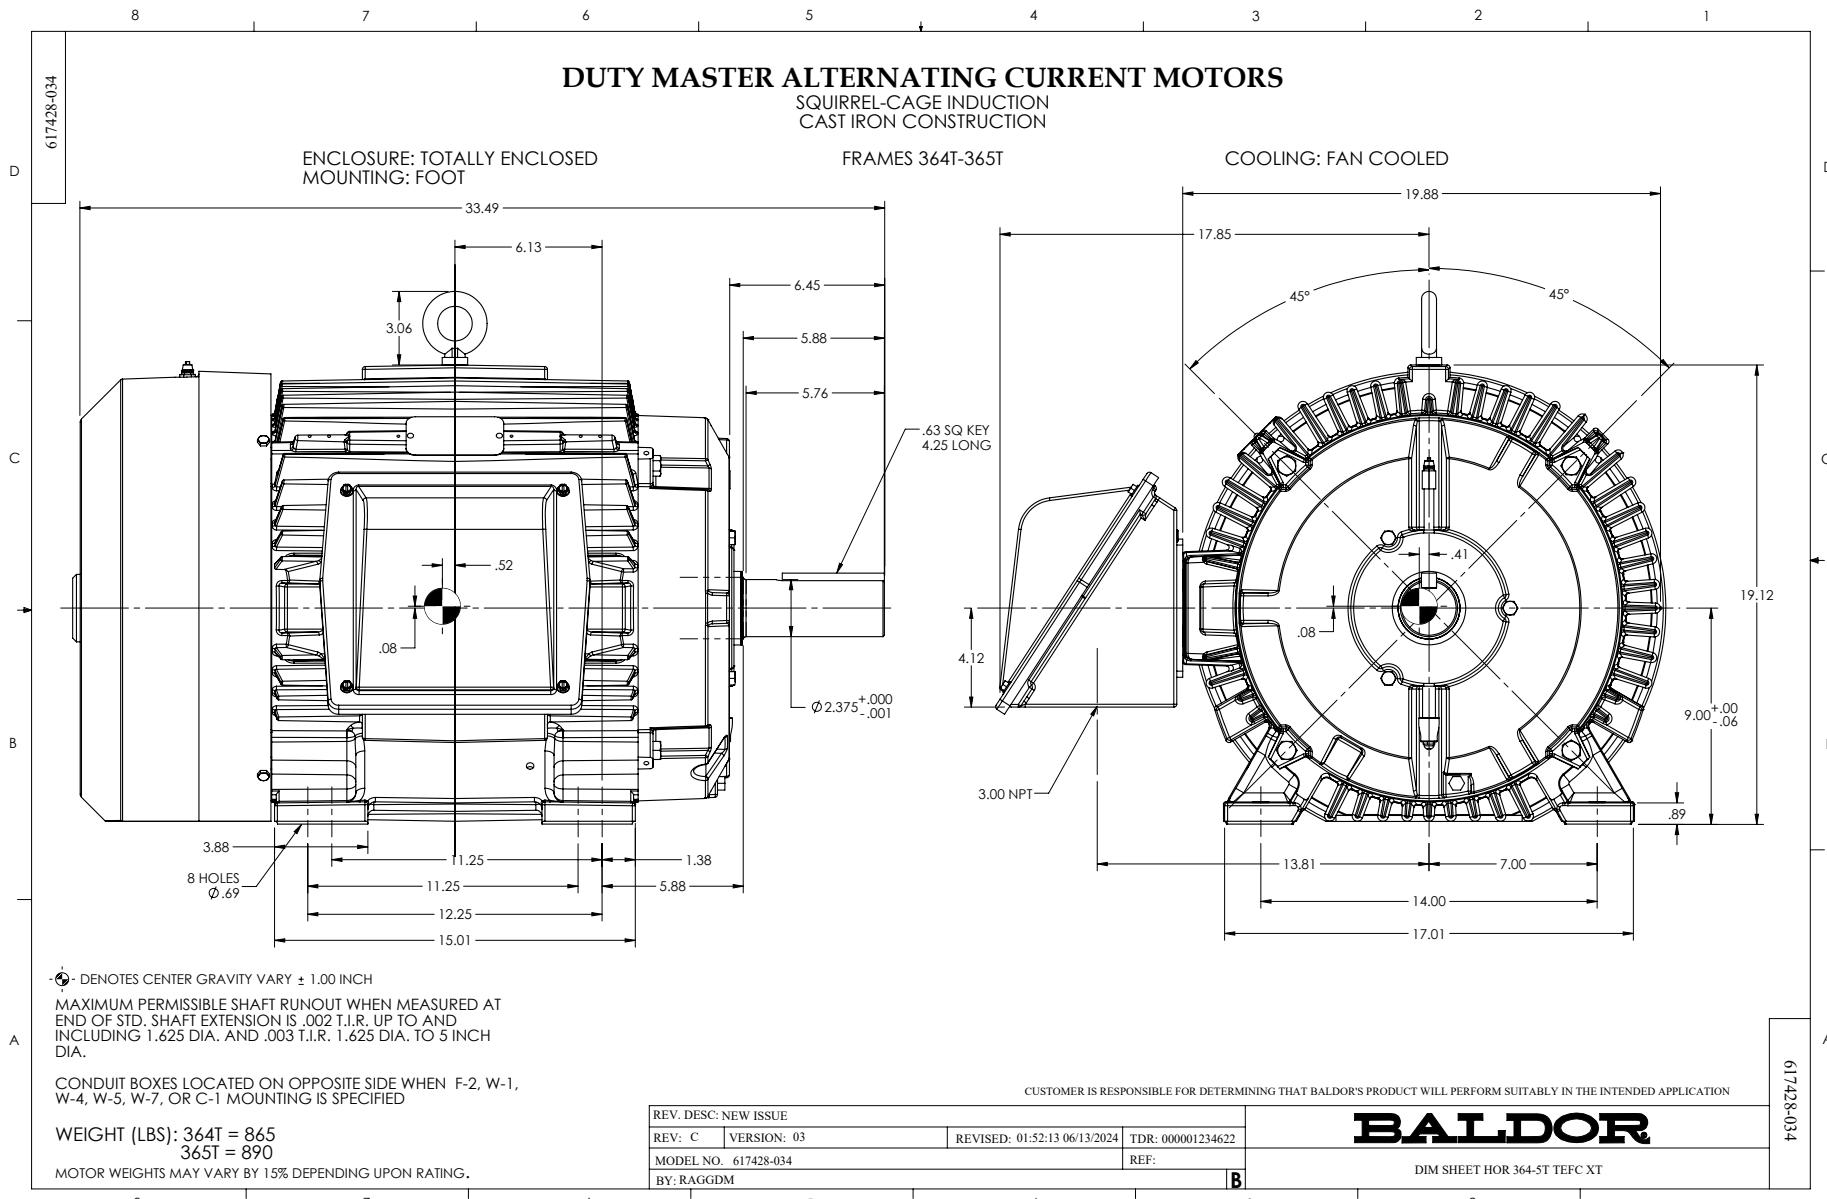

416820-002

A-C METER
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

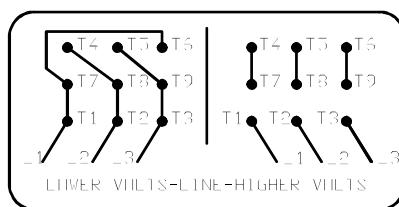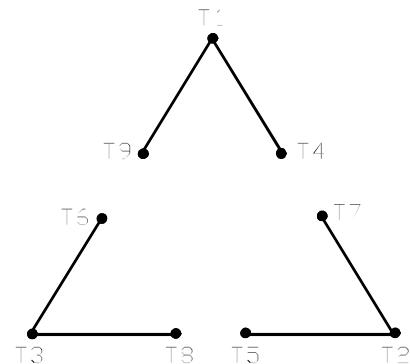

< N. P. 1575-B >

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE

REV. LTR: A

VERSION: 01

TDR: 000001009382

FILE: \MGA\00000\661

REVISED: 02:46:19 02/13/2020

BY: MGHMTT

MTL: -

BALDOR - RELIANCE®

CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED

SH 1 of 1

416820-002