



Customer information packet

ECR9608TR

60HP, 900RPM, 3PH, 60HZ, 405T, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	405T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	900 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Mobil SHC 220 (Athens Only)
Constant Torque Speed Range	10-60
Current @ Voltage	186.000 A @ 230.0 V 93.200 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	92.4 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	93.2 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Max Speed	3000 rpm

Part detail

Revision	G
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG5134
Layout	617429-501
Eff. date	03-16-2021
CD Diagram	416820-002
Poles	08
Leads	3#4,6#6
Proprietary	False
Created date	05-07-2015

Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A4064M
Mounting Arrangement	F1
Number of Poles	8
Overall Length	38.20 IN
Power Factor	65
Product Family	Crusher / Chipper
Pulley End Bearing Type	Roller
Pulley Face Code	Standard
Service Factor	1.25
Shaft Diameter	2.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	885 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate


000613007PV

CAT NO	ECR9608TR				SPEC NO.				P40G1707					
HP	60	AMPS	186/93.2			VOLTS		230/460		DESIGN	A			
RPM	885	RPM MAX	3000		HZ	60	AMB	40	SF	1.25				
D.E. BRG.DATA	NU316		O.D.E. BRG.DATA				6316		PH	3	DUTY	CONT	INSUL.CLASS	F
FRAME	405T	I.P.	55	TYPE	P	ENCL	TEFC	CODE	H					
POWER FACTOR	65	3/4 LOAD EFF.				92.4		NEMA NOM EFFICIENCY				92.4		
CHP HZ	60-90	CT HZ	10-60		VT HZ	6-60								
SER.NO.					MOTOR WEIGHT				1420					
1.25SF AMPS= 218/109														

NP2496L	
MOBIL SHC -220 GREASE	

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	404T	60	P	3/60	885	460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
93.2	CONT	40/F	1.25	A	H	TEFC
E/S	ROTOR		TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)	
405134	418142071UE		---	---	.0965	
PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER % FACTOR	% EFFICIENCY	
NO LOAD	0	51.1	900	4.11	0	
1/4	15.0	55.8	897	29.3	86.2	
2/4	30.0	64.3	894	47.9	91.2	
3/4	45.0	76.9	890	59.3	92.4	
4/4	60.0	93.2	887	65.2	92.4	
5/4	75.0	113	882	67.5	91.9	
SPEED TORQUE						
	RPM	% FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	286	1015	508		
PULL UP	630	236	838	395		
BREAKDOWN	832	274	975	281		
FULL LOAD	887	100	355	93.2		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: CALCULATED DATA						
			DR. BY E.J. CHRISTIAN CR. BY T.G. KELATI APP. BY T.G. KELATI DATE 08/14/15			
A MEMBER OF THE ABB GROUP			A-C MOTOR PERFORMANCE DATA A40WG5134-R001 ISSUE DATE 08/14/15			

REL. S. O.		RPM	885	S. F.	1.25	ROTOR	418142071UE
FRAME	404T	VOLTS	460	NEMA DESIGN	A	TEST S. O.	CALCULATED DATA
HP	60	AMPS	93.2	CODE LETTER	H	TEST DATE	---
TYPE	P	DUTY	CONT	ENCLOSURE	TEFC	STATOR RES. @ 25 °C	.0965
PHASE/HERTZ	3/60	AMB °C/INSUL	40/F	E/S	405134	OHMS (BETWEEN LINES)	

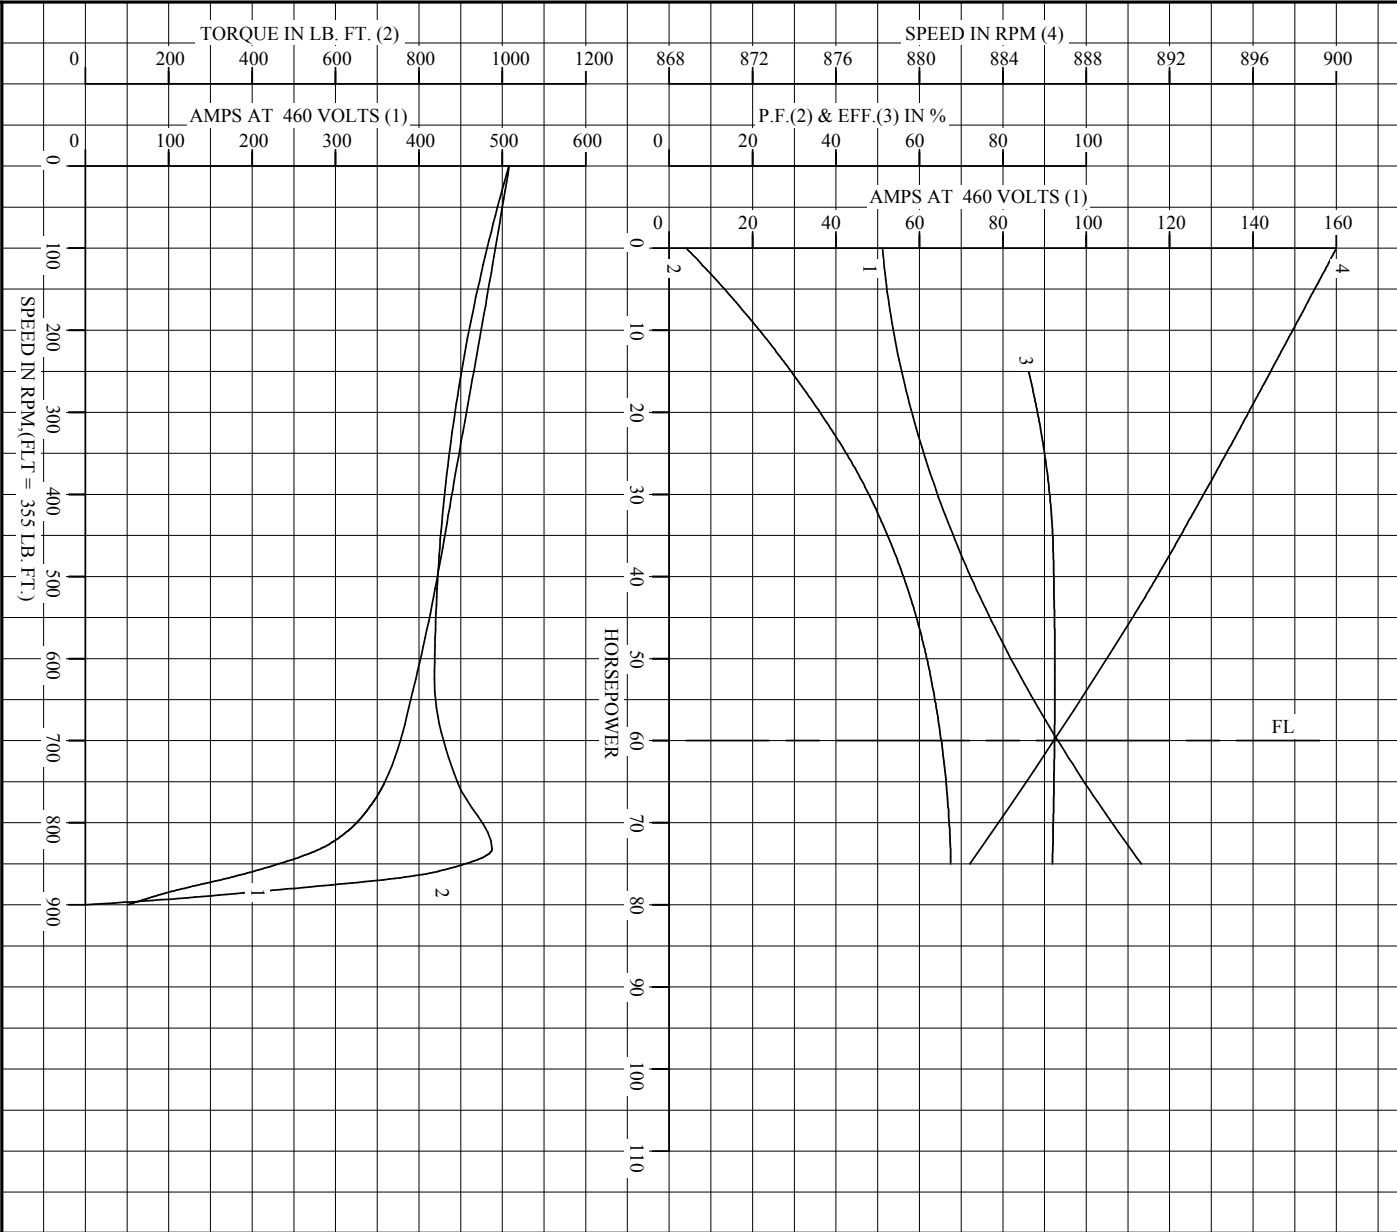

AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR
A MEMBER OF THE ABB GROUP

DR. BY E. CHRISTIAN
CK. BY T. KELATI
APP. BY T. KELATI
DATE 08/14/15

A-C MOTOR
PERFORMANCE
CURVES
A40WG5134-R001
ISSUE DATE 08/14/15

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION

ENCLOSURE: TOTALLY ENCLOSED



FRAME G405T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 404T FRAME MOUNTING HOLES

XT/ECP SEVERE DUTY ENCLOSURE

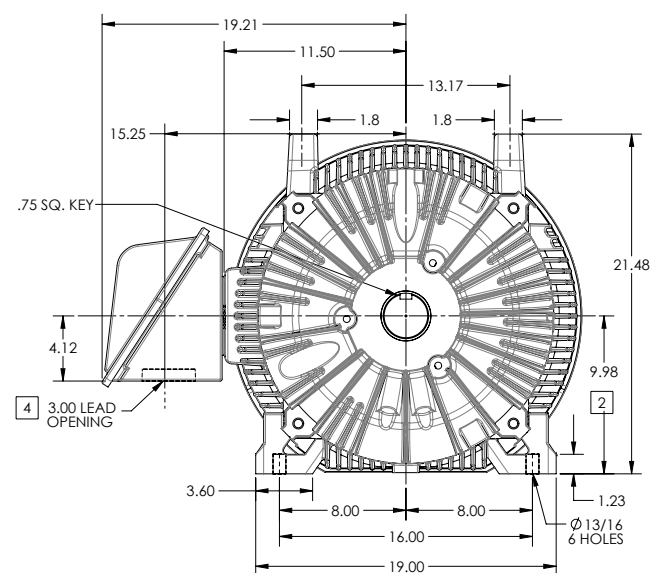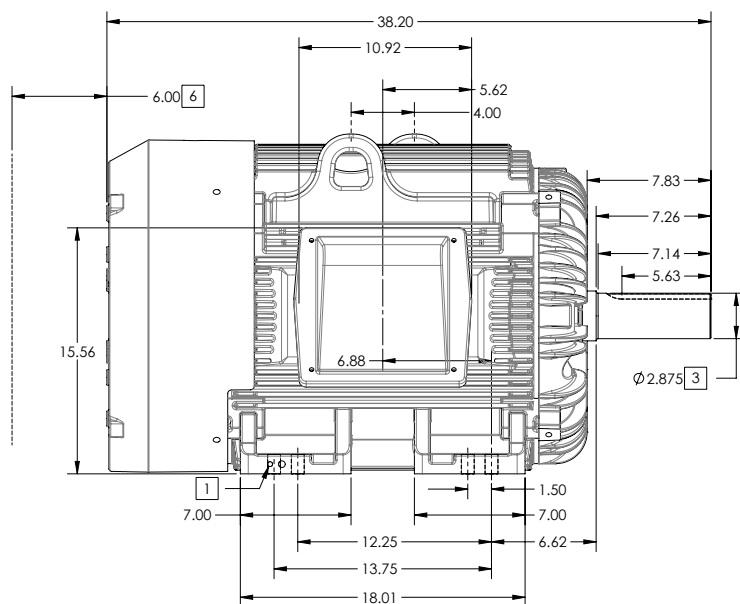

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +.00, -.06
3. VARIES +.000, -.001
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .003" T.I.R. TO 5 INCH DIA.

[5] WEIGHT (LBS): 1370

DIMENSIONS ARE IN INCHES; SEE SHEET 2 FOR DIMENSIONS IN MILLIMETERS

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
1 OF 2

105-627219

REV. DESC: CHANGE BA FROM 6.76 TO 6.62

REV: B VERSION: 02

REVISED: 01-11-16 04/14/2014

TDR: 000000848770

MODEL NO. 617429-501

REF:

BY: MGH/MZ2

Material:

BALDOR

G405T/404T STD - FOOTED - XT/ECP SEVERE DUTY ENCLOSURE

617429-501

DUTY MASTER ALTERNATING CURRENT MOTORS

SQUIRREL-CAGE INDUCTION

ENCLOSURE: TOTALLY ENCLOSED



FRAME G405T ABOVE NEMA RATINGS

COOLING: FAN COOLED

MOUNTING: FOOT

INCLUDES 404T FRAME MOUNTING HOLES

XT/ECP SEVERE DUTY ENCLOSURE

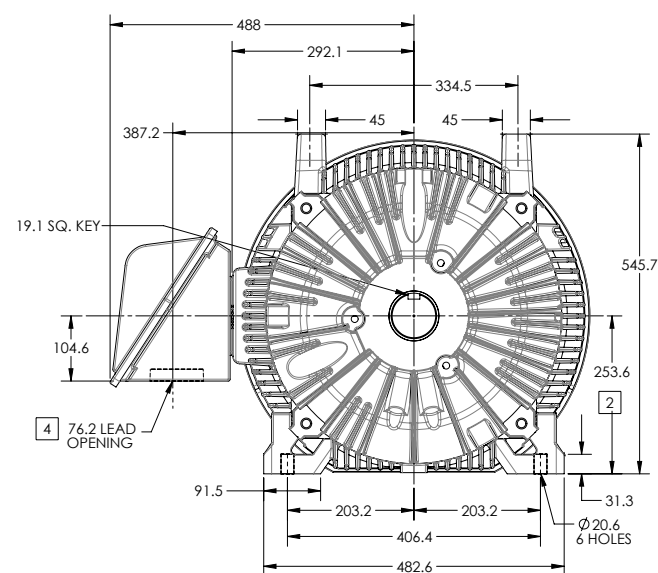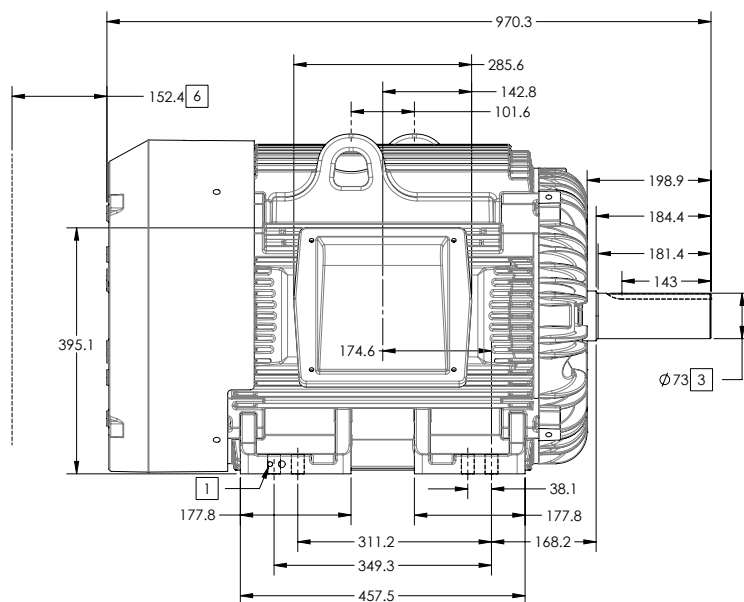

1. GROUND HOLES QTY 1 1/2-13 TAP; QTY 1 3/8-16 TAP
2. VARIES +0,-1.5
3. VARIES +00,-.03
4. ON STANDARD MOTORS THIS IS CONDUIT SIZE. ON XT AND CORROSION PROOF MOTOR THIS IS PIPE TAP.
5. MOTOR WEIGHTS MAY VARY BY 15% DEPENDING ON RATING.
6. OBSTRUCTION MUST NOT ENCR OACH ON AIR INLET

CONDUIT BOX LOCATED ON OPPOSITE SIDE WHEN F-2.
IF MOUNTING CLEARANCE DETAILS ARE REQUIRED, CONSULT FACTORY.
MAXIMUM PERMISSIBLE SHAFT RUNOUT WHEN MEASURED AT END OF
STANDARD SHAFT EXTENSION IS .08 MM T.I.R. TO 127 MM DIA.

[5] WEIGHT (KGS): 630

DIMENSIONS ARE IN MILLIMETERS; SEE SHEET 1 FOR DIMENSIONS IN INCHES

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.

SHEET NUMBER
2 OF 2

105-627219

REV. DESC: CHANGE BA FROM 6.76 TO 6.62

REV: B VERSION: 02

REVISED: 01-11-16 04/14/2014

TDR: 000000848770

MODEL NO. 617429-501

REF:

BY: MGHUMZ2

Material:

BALDOR

G405T/404T STD - FOOTED - XT/ECP SEVERE DUTY ENCLOSURE

617429-501

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED



(N.P. 1575-B)

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: -		

BALDOR - RELIANCE®

CONN DIAG - STANDARD 9 LEAD, DELTA-CONNECTED
SH 1 of 1

416820-002