



---

# Customer information packet

## ECS101A3K4EF4

4KW, 1500RPM, 3PH, 50HZ, D112S, 3632B, TEFC, B3

Class - None

Division - Not Applicable

## Specifications

|                                |                                |
|--------------------------------|--------------------------------|
| Enclosure                      | TEFC                           |
| Frame                          | D112S                          |
| Frame Material                 | Steel                          |
| Frequency                      | 50.00 Hz                       |
| Haz Area Class and Group       | None                           |
| Haz Area Division              | Not Applicable                 |
| Motor Letter Type              | Brushless Wound Field PM Rotor |
| Output @ Frequency             | 4.000 KW @ 50 HZ               |
| Phase                          | 3                              |
| Synchronous Speed @ Frequency  | 1500 RPM @ 50 HZ               |
| Voltage @ Frequency            | 380.0 V @ 50 HZ                |
| Agency Approvals               | WEEE<br>UKCA<br>CULUS<br>CE    |
| Ambient Temperature            | 40 °C                          |
| Auxiliary Box                  | NO AUXILLARY BOX               |
| Auxiliary Box Lead Termination | None                           |
| Base Indicator                 | Rigid                          |
| Bearing Grease Type            | Polyrex EM (-20F +300F)        |
| Blower                         | None                           |
| Constant Torque Speed Range    | 5                              |
| Current @ Voltage              | 6.800 A @ 380.0 V              |
| Design Code                    | B                              |
| Drip Cover                     | No Drip Cover                  |
| Duty Rating                    | S1                             |
| Efficiency @ 100% Load         | 91.6 %                         |
| Electrically Isolated Bearing  | Not Electrically Isolated      |
| Feedback Device                | NO FEEDBACK                    |
| Frame Prefix                   | D                              |
| Heater Indicator               | No Heater                      |
| High Voltage Full Load Amps    | 6.8 a                          |

## Part detail

|              |                     |
|--------------|---------------------|
| Revision     | D                   |
| Type         | AC                  |
| Mech. spec.  |                     |
| Base         |                     |
| Status       | PRD/A               |
| Elec. spec.  | 36WGA0022           |
| Layout       | 36LYT346            |
| Eff. date    | 11-15-2024          |
| CD Diagram   | CD0006B03           |
| Poles        | 04                  |
| Leads        | 3#12 15" LONG LEADS |
| Proprietary  | False               |
| Created date | 01-11-2023          |

|                            |                       |
|----------------------------|-----------------------|
| Insulation Class           | F                     |
| Inverter Code              | Inverter Duty         |
| Lifting Lugs               | Standard Lifting Lugs |
| Locked Bearing Indicator   | Locked Bearing        |
| Motor Lead Termination     | Flying Leads          |
| Motor Standards            | IEC                   |
| Motor Type                 | 3632B                 |
| Mounting Arrangement       | B3                    |
| Number of Poles            | 4                     |
| Overall Length             | 21.87 IN              |
| Power Factor               | 97                    |
| Product Family             | General Purpose       |
| Pulley Face Code           | Standard              |
| Rodent Screen              | None                  |
| Service Factor             | 1.00                  |
| Shaft Diameter             | 1.103 IN              |
| Shaft Ground Indicator     | Shaft Grounding       |
| Shaft Rotation             | Reversible            |
| Speed                      | 1500 rpm              |
| Speed Code                 | Single Speed          |
| Starting Method            | INVERTER SPECIAL      |
| Thermal Device - Bearing   | None                  |
| Thermal Device - Winding   | None                  |
| Vibration Sensor Indicator | No Vibration Sensor   |
| Winding Thermal 1          | None                  |
| Winding Thermal 2          | None                  |

**Nameplate**

| NP3978A00 |           |              |   |    |    |     |
|-----------|-----------|--------------|---|----|----|-----|
| PART NO.  | ECIN4A9P5 |              |   |    |    |     |
| U1        | 400       | PH           | 3 | HZ | 50 |     |
| I1        | 8         | W/EXT. CHOKE |   |    |    | 6.8 |
| SERIAL #  |           |              |   |    |    |     |

## NP3968B01A01

|             |               |            |      |           |           |          |      |     |  |  |
|-------------|---------------|------------|------|-----------|-----------|----------|------|-----|--|--|
| CAT.NO.     | ECS101A3K4EF4 |            |      |           |           |          |      |     |  |  |
| SPEC.       | 36-0000-3643  |            |      |           |           | YR       |      |     |  |  |
| FRAME       | D112S         |            |      | IP        | 55        | WT.      | 97   |     |  |  |
| KW          | 4             | HZ         | 50   | PH        | 3         | DUTY-IPM | S1   |     |  |  |
| INS CL      | F             | CLASS RISE |      |           |           | AMB-C    | 40   |     |  |  |
| EFF. CL     | IE5           | EFF        | 91.6 |           |           | COSØ     | 97   |     |  |  |
| VOLTS       | 380           |            |      | FLA       | 6.8       |          |      |     |  |  |
| 1/MIN       | 1500          |            |      |           | 1/MIN MAX |          | 3000 |     |  |  |
| BEMF (V)    | 210           |            |      | RS (OHMS) |           |          | 3.3  |     |  |  |
| LD (MH)     | 54            |            |      |           | LQ (MH)   |          |      | 191 |  |  |
| VPWM        | CP =          | 50         | TO   |           | 100       |          |      |     |  |  |
| CT          | 5             | TO         | 50   | VT        | 1         | TO       | 50   |     |  |  |
| MATCHED INV | ECIN4A9P5     |            |      |           |           |          |      |     |  |  |
| DE          | 6206          |            |      | ODE       | 6205      |          |      |     |  |  |
| SERIAL #    |               |            |      |           |           |          |      |     |  |  |

|          |          |          |                |            |           |       |                  |
|----------|----------|----------|----------------|------------|-----------|-------|------------------|
| Volts    | 190/380  | Max RPM  | 3000           | Conn Diag. | CD0005A25 | Leads | 9                |
| Amps     | 13.6/6.8 | Max Amps |                | Cs Diagram | CS0576    | BEMF  | 105/210          |
| KW       | 4        | VFD#     | ACS380-040S-09 |            |           | LD    | 13.5/54.0        |
| RPM      | 1500     | S.F.     | 1.00           |            |           | LQ    | 47.8/191.0       |
| Phase/Hz | 3/50     | Rating   | 40C AMB-S1     |            |           | Rs    | 3.3231 Meas. L-L |

60034-2-3 Motor Performance at Standardized Operating Points

|    | RPM  | % Speed | LB-FT | % Torque | KW  | Efficiency | Loss (% FL) | Watts Loss (W) |
|----|------|---------|-------|----------|-----|------------|-------------|----------------|
| P1 | 1350 | 90%     | 18.8  | 100%     | 4.8 | 90.4       | 9.48%       | 383            |
| P2 | 750  | 50%     | 18.8  | 100%     | 2.7 | 86.5       | 7.72%       | 312            |
| P3 | 375  | 25%     | 18.8  | 100%     | 1.3 | 78.3       | 6.87%       | 278            |
| P4 | 1350 | 90%     | 9.4   | 50%      | 2.4 | 92.4       | 3.67%       | 149            |
| P5 | 750  | 50%     | 9.4   | 50%      | 1.3 | 89.2       | 2.98%       | 121            |
| P6 | 750  | 50%     | 4.7   | 25%      | 0.7 | 89.8       | 1.40%       | 57             |
| P7 | 375  | 25%     | 4.7   | 25%      | 0.3 | 84.7       | 1.12%       | 45             |


61800-9-2 PDS Performance at Reference Operating Points

|    | RPM  | % Speed | LB-FT | % Torque | KW  | System Efficiency | Loss (% FL) | Watts Loss (W) |
|----|------|---------|-------|----------|-----|-------------------|-------------|----------------|
| P1 | 1500 | 100%    | 18.8  | 100%     | 5.4 | 87.9              | 13.58%      | 549            |
| P2 | 750  | 50%     | 18.8  | 100%     | 2.7 | 84.1              | 9.35%       | 378            |
| P3 | 255  | 17%     | 18.8  | 100%     | 0.9 | 67.7              | 8.02%       | 324            |
| P4 | 1500 | 100%    | 9.4   | 50%      | 2.7 | 91.1              | 4.85%       | 196            |
| P5 | 750  | 50%     | 9.4   | 50%      | 1.3 | 86.1              | 3.99%       | 162            |
| P6 | 255  | 17%     | 9.4   | 50%      | 0.5 | 71.8              | 3.30%       | 133            |
| P7 | 750  | 50%     | 4.7   | 25%      | 0.7 | 85.2              | 2.14%       | 87             |
| P8 | 255  | 17%     | 4.7   | 25%      | 0.2 | 71.1              | 1.71%       | 69             |


Points not taken in certified order.

|                          |                                                                                       |                                    |                                                   |
|--------------------------|---------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------|
| <b>BALDOR • RELIANCE</b> | DR By: <u>R &amp; D</u><br>CK By: <u>USGAHL</u><br>APP By:<br>Date: <u>04/09/2025</u> | <b>AC MOTOR PERFORMANCE CURVES</b> | <b>36WGA0020</b><br>36-0000-3634<br>Test - 112234 |
|--------------------------|---------------------------------------------------------------------------------------|------------------------------------|---------------------------------------------------|


|          |          |          |                |            |           |       |                 |
|----------|----------|----------|----------------|------------|-----------|-------|-----------------|
| Volts    | 190/380  | Max RPM  | 3000           | Conn Diag. | CD0005A25 | Leads | 9               |
| Amps     | 13.6/6.8 | Max Amps |                | Cs Diagram | CS0576    | BEMF  | 105/210         |
| KW       | 4        | VFD #    | ACS380-040S-09 |            |           | LD    | 13.5/54.0       |
| RPM      | 1500     | S.F.     | 1.00           |            |           | LQ    | 47.8/191.0      |
| Phase/Hz | 3/50     | Rating   | 40C AMB-S1     |            |           | Rs    | 3.3231 Meas L-L |

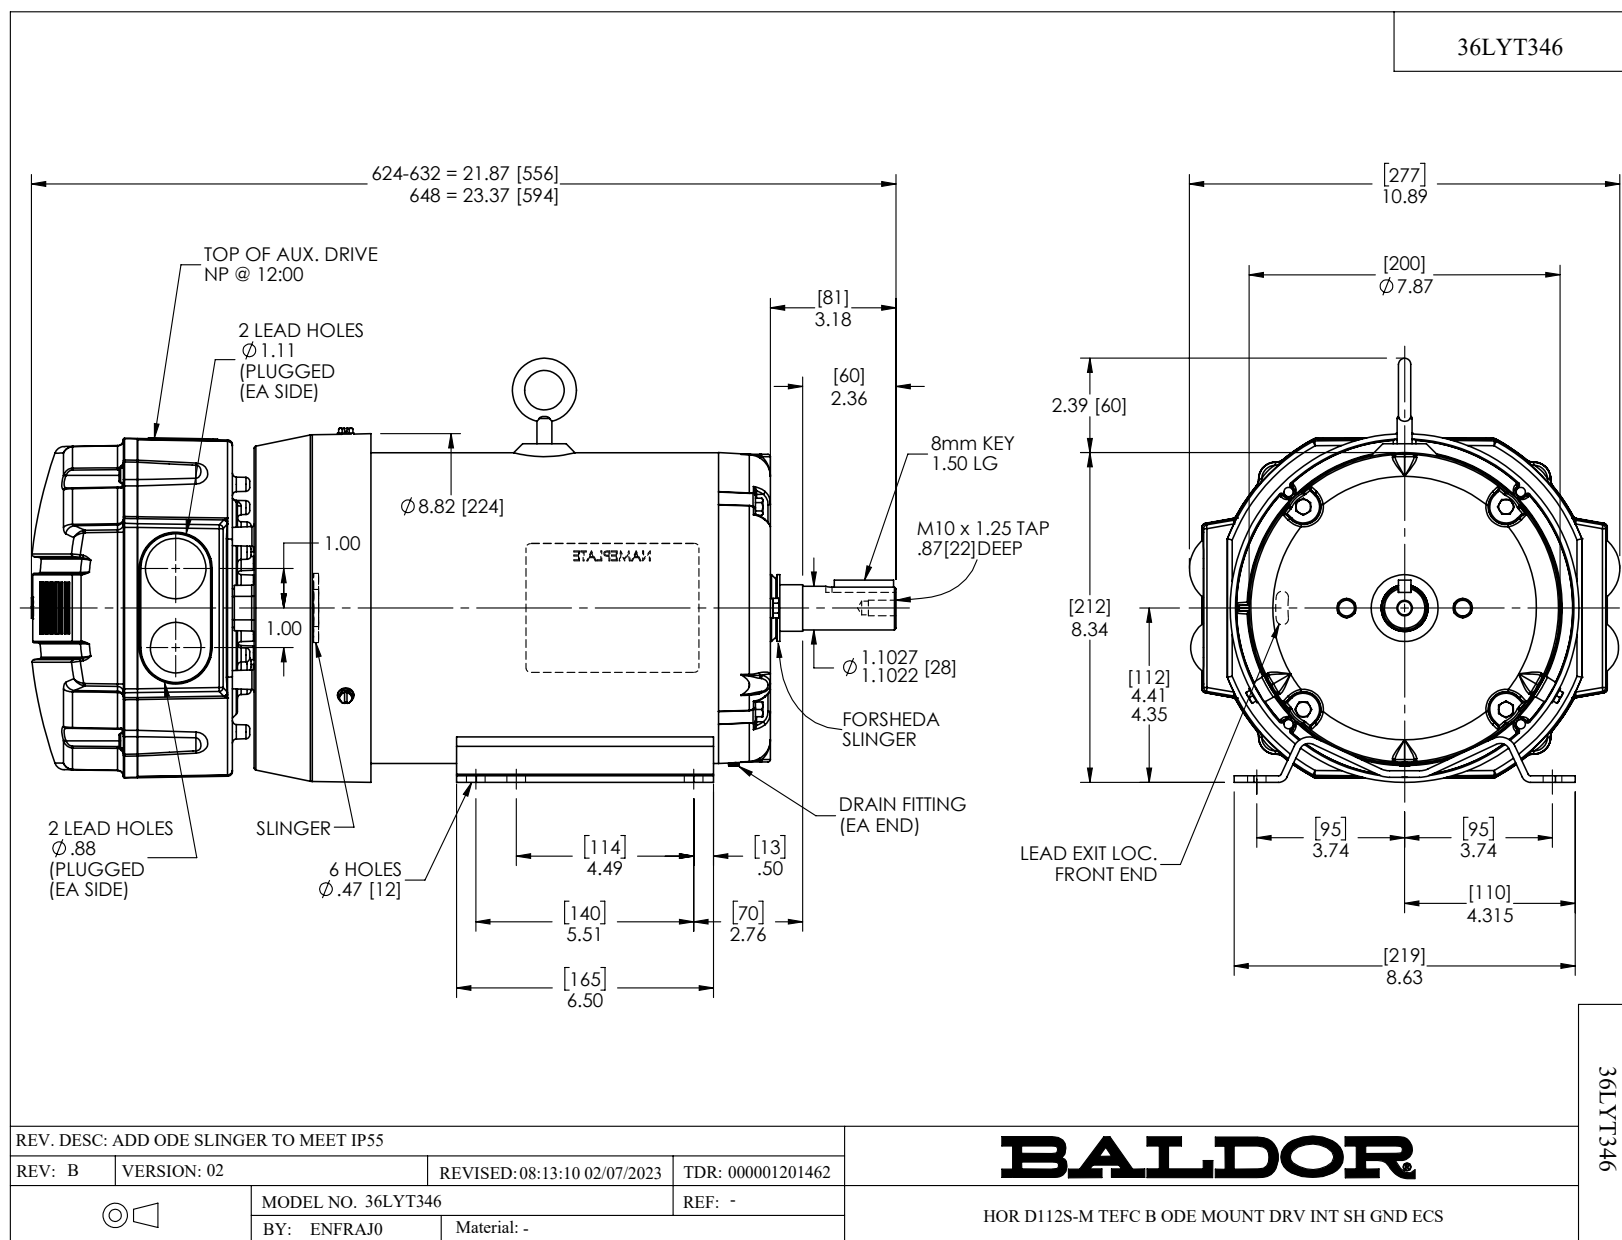

36CB3502A00

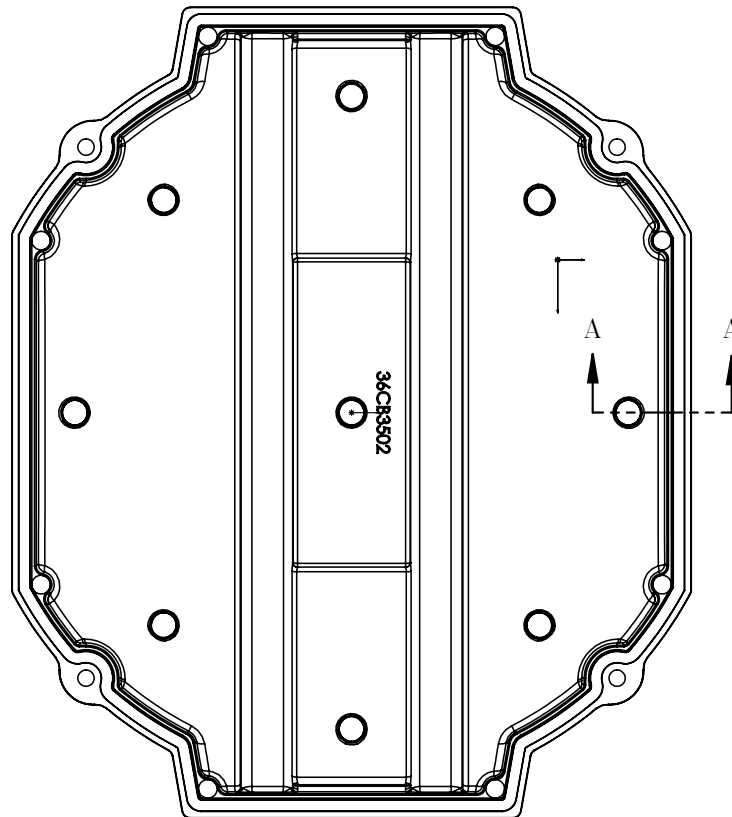

MATERIAL: RAMPF, RAKU-PUR 32-3280-51L

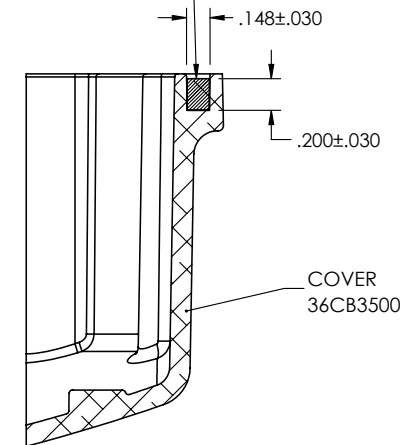

SECTION A-A

REV. DESC: NEW

REV: -

VERSION: 00

REVISED: 09:16:43 01/15/2020

TDR: 000001129989



MODEL NO. 36CB3502A00

REF: -

BY: ENMARS0

Material: -

BALDOR - RELIANCE®

36 FRAME ODE ECM ALUMINUM COVER WITH FOAM SEAL

36CB3502A00

