



---

# Customer information packet

## ECS101M0K11FE4

11KW, 1500RPM, 3PH, 50HZ, D132D, 3760B, TEFC, B

Class - None

Division - Not Applicable

## Specifications

|                                |                                          |
|--------------------------------|------------------------------------------|
| Enclosure                      | TEFC                                     |
| Frame                          | D132D                                    |
| Frame Material                 | Steel                                    |
| Frequency                      | 50.00 Hz                                 |
| Haz Area Class and Group       | None                                     |
| Haz Area Division              | Not Applicable                           |
| Motor Letter Type              | Brushless Wound Field PM Rotor           |
| Output @ Frequency             | 11.000 KW @ 50 HZ                        |
| Phase                          | 3                                        |
| Synchronous Speed @ Frequency  | 1500 RPM @ 50 HZ                         |
| Voltage @ Frequency            | 190.0 V @ 50 HZ<br>380.0 V @ 50 HZ       |
| Agency Approvals               | CE<br>WEEE<br>UKCA<br>CULUS              |
| Ambient Temperature            | 40 °C                                    |
| Auxiliary Box                  | NO AUXILLARY BOX                         |
| Auxiliary Box Lead Termination | None                                     |
| Base Indicator                 | Rigid                                    |
| Bearing Grease Type            | Polyrex EM (-20F +300F)                  |
| Blower                         | None                                     |
| Constant Torque Speed Range    | 5                                        |
| Current @ Voltage              | 23.400 A @ 380.0 V<br>46.800 A @ 190.0 V |
| Design Code                    | B                                        |
| Drip Cover                     | No Drip Cover                            |
| Duty Rating                    | S1                                       |
| Efficiency @ 100% Load         | 94.2 %                                   |
| Electrically Isolated Bearing  | Not Electrically Isolated                |
| Feedback Device                | NO FEEDBACK                              |
| Frame Prefix                   | D                                        |

## Part detail

|              |            |
|--------------|------------|
| Revision     | G          |
| Type         | AC         |
| Mech. spec.  |            |
| Base         |            |
| Status       | PRD/A      |
| Elec. spec.  | 37WGA0018  |
| Layout       | 37LYT621   |
| Eff. date    | 09-09-2024 |
| CD Diagram   | CD0005A25  |
| Poles        | 04         |
| Leads        | 9#12       |
| Proprietary  | False      |
| Created date | 01-11-2023 |

|                             |                       |
|-----------------------------|-----------------------|
| Heater Indicator            | No Heater             |
| High Voltage Full Load Amps | 23.4 a                |
| Insulation Class            | F                     |
| Inverter Code               | Inverter Duty         |
| Lifting Lugs                | Standard Lifting Lugs |
| Locked Bearing Indicator    | Locked Bearing        |
| Motor Lead Termination      | Terminal Block        |
| Motor Standards             | IEC                   |
| Motor Type                  | 3760B                 |
| Mounting Arrangement        | B5                    |
| Number of Poles             | 4                     |
| Overall Length              | 21.69 IN              |
| Power Factor                | 82                    |
| Product Family              | General Purpose       |
| Pulley Face Code            | D-Flange              |
| Rodent Screen               | None                  |
| Service Factor              | 1.00                  |
| Shaft Diameter              | 1.497 IN              |
| Shaft Ground Indicator      | Shaft Grounding       |
| Shaft Rotation              | Reversible            |
| Speed                       | 1500 rpm              |
| Speed Code                  | Single Speed          |
| Starting Method             | INVERTER SPECIAL      |
| Thermal Device - Bearing    | None                  |
| Thermal Device - Winding    | None                  |
| Vibration Sensor Indicator  | No Vibration Sensor   |
| Winding Thermal 1           | None                  |
| Winding Thermal 2           | None                  |

## Nameplate

| NP3968B01A01 |                |            |    |      |           |             |     |             |  |    |  |
|--------------|----------------|------------|----|------|-----------|-------------|-----|-------------|--|----|--|
| CAT.NO.      | ECS101MOK11FE4 |            |    |      |           |             |     |             |  |    |  |
| SPEC.        | 37-0000-0493   |            |    |      |           | YR          |     |             |  |    |  |
| FRAME        | D132D          |            | IP |      | 55        | WT.         |     | 256         |  |    |  |
| KW           | 11             | HZ         |    | 50   | PH        |             | 3   | DUTY-IPM    |  | S1 |  |
| INS CL       | F              | CLASS RISE |    |      |           | AMB-C       |     | 40          |  |    |  |
| EFF. CL      | IE5            | EFF        |    | 94.2 |           | COSØ        |     | 82          |  |    |  |
| VOLTS        | 190/380        |            |    | FLA  |           | 47.74/23.87 |     |             |  |    |  |
| 1/MIN        | 1500           |            |    |      | 1/MIN MAX |             |     | 3000        |  |    |  |
| BEMF (V)     | 98/196         |            |    |      | RS (OHMS) |             |     | 0.12/0.50   |  |    |  |
| LD (MH)      | 3.39/13.46     |            |    |      | LQ (MH)   |             |     | 10.59/42.17 |  |    |  |
| VPWM         | CP =           |            | 50 |      | TO        |             | 100 |             |  |    |  |
| CT           | 5              | TO         |    | 50   | VT        |             | 1   | TO          |  | 50 |  |
| MATCHED INV  |                |            |    |      |           |             |     |             |  |    |  |
| DE           | 6208           |            |    | ODE  |           | 6206        |     |             |  |    |  |
| SERIAL #     |                |            |    |      |           |             |     |             |  |    |  |

|          |             |          |                |            |           |       |           |
|----------|-------------|----------|----------------|------------|-----------|-------|-----------|
| Volts    | 190/380     | Max RPM  | 3000           | Conn Diag. | CD0005A25 | Leads | 9         |
| Amps     | 47.74/23.87 | Max Amps |                | Cs Diagram | CS0576    | BEMF  | 0         |
| KW       | 11          | VFD#     | ACS380-040S-03 |            |           | LD    | 0         |
| RPM      | 1500        | S.F.     | 1.00           |            |           | LQ    | 0         |
| Phase/Hz | 3/50        | Rating   | 40C AMB-S1     |            |           | Rs    | 0.4931    |
|          |             |          |                |            |           |       | Meas. L-L |

60034-2-3 Motor Performance at Standardized Operating Points

|    | RPM  | % Speed | LB-FT | % Torque | KW   | Efficiency | Loss (% FL) | Watts Loss (W) |
|----|------|---------|-------|----------|------|------------|-------------|----------------|
| P1 | 1350 | 90%     | 51.6  | 100%     | 13.3 | 94.5       | 5.23%       | 575            |
| P2 | 750  | 50%     | 51.6  | 100%     | 7.4  | 92.2       | 4.25%       | 468            |
| P3 | 375  | 25%     | 51.6  | 100%     | 3.7  | 87.4       | 3.62%       | 399            |
| P4 | 1350 | 90%     | 25.8  | 50%      | 6.6  | 95.1       | 2.33%       | 256            |
| P5 | 750  | 50%     | 25.8  | 50%      | 3.7  | 93.6       | 1.73%       | 190            |
| P6 | 750  | 50%     | 12.9  | 25%      | 1.8  | 93.6       | 0.85%       | 94             |
| P7 | 375  | 25%     | 12.9  | 25%      | 0.9  | 91.2       | 0.60%       | 66             |

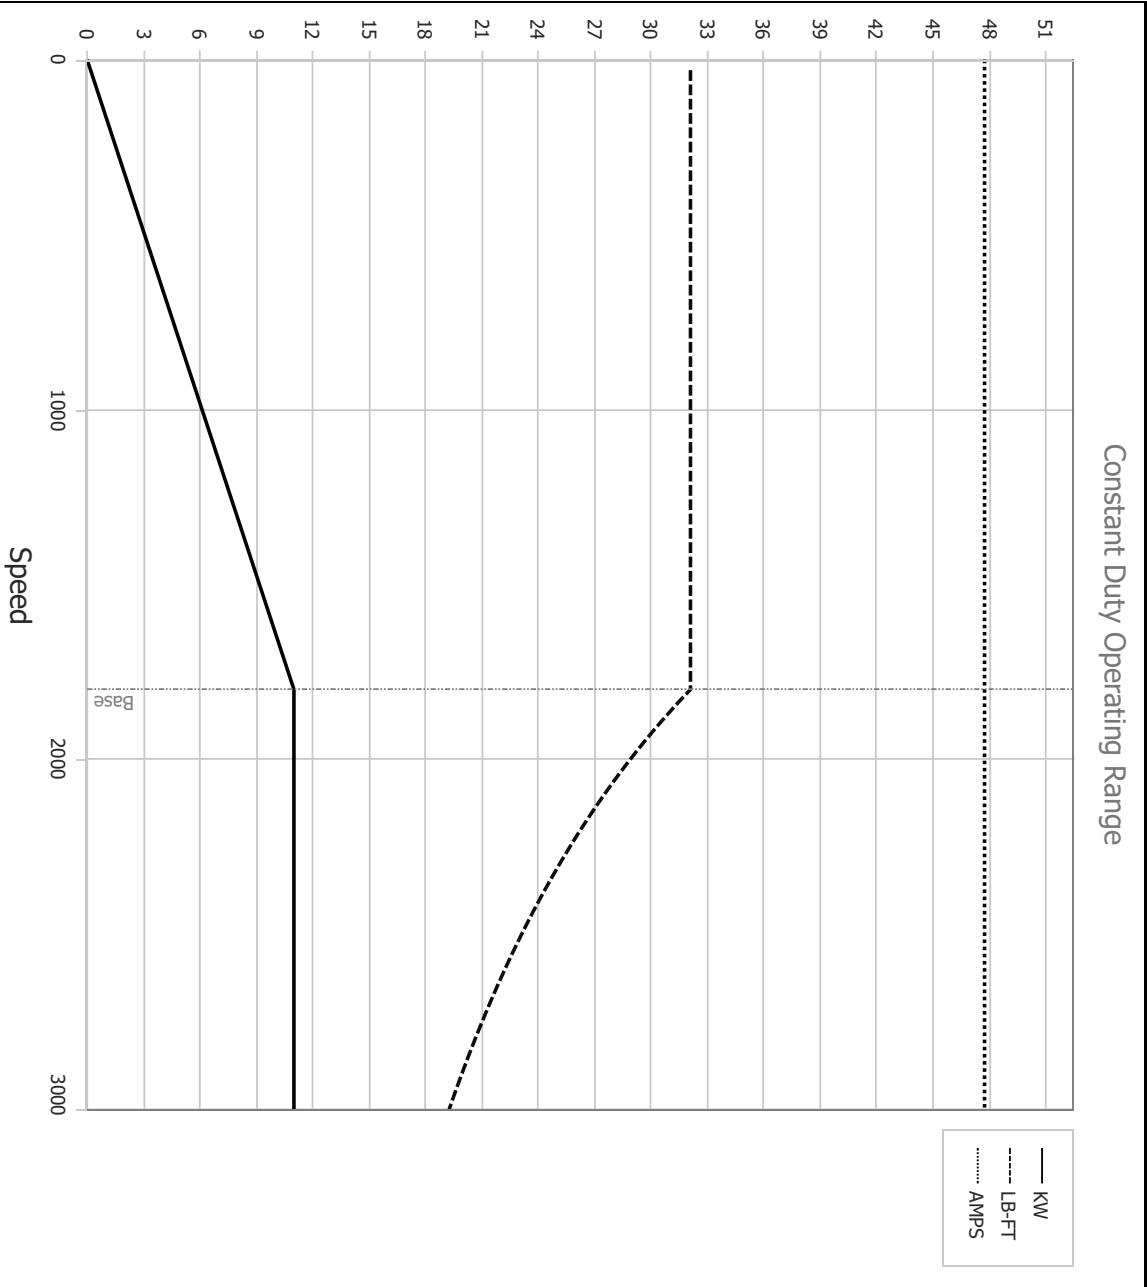
61800-9-2 PDS Performance at Reference Operating Points

|    | RPM  | % Speed | LB-FT | % Torque | KW   | System Efficiency | Loss (% FL) | Watts Loss (W) |
|----|------|---------|-------|----------|------|-------------------|-------------|----------------|
| P1 | 1500 | 100%    | 51.6  | 100%     | 14.7 | 93.2              | 7.29%       | 802            |
| P2 | 750  | 50%     | 51.6  | 100%     | 7.4  | 89.0              | 6.19%       | 681            |
| P3 | 255  | 17%     | 51.6  | 100%     | 2.5  | 76.5              | 5.21%       | 573            |
| P4 | 1500 | 100%    | 25.8  | 50%      | 7.4  | 93.3              | 3.62%       | 398            |
| P5 | 750  | 50%     | 25.8  | 50%      | 3.7  | 89.8              | 2.84%       | 313            |
| P6 | 255  | 17%     | 25.8  | 50%      | 1.3  | 78.8              | 2.29%       | 252            |
| P7 | 750  | 50%     | 12.9  | 25%      | 1.8  | 88.5              | 1.62%       | 178            |
| P8 | 255  | 17%     | 12.9  | 25%      | 0.6  | 77.1              | 1.26%       | 139            |


Points not taken in certified order.

|                          |         |                                            |                                    |                                                   |
|--------------------------|---------|--------------------------------------------|------------------------------------|---------------------------------------------------|
| <b>BALDOR • RELIANCE</b> | DR By:  | <u>R &amp; D</u>                           | <b>AC MOTOR PERFORMANCE CURVES</b> | <b>37WGA0018</b><br>37-0000-0489<br>Test - 111409 |
|                          | CK By:  | <u>USTOSAN</u>                             |                                    |                                                   |
|                          | App By: | <u>USJAROB1</u><br>Date: <u>10/11/2024</u> |                                    |                                                   |




|          |             |          |                |            |           |       |                 |
|----------|-------------|----------|----------------|------------|-----------|-------|-----------------|
| Volts    | 190/380     | Max RPM  | 3000           | Conn Diag. | CD0005A25 | Leads | 9               |
| Amps     | 47.74/23.87 | Max Amps |                | Cs Diagram | CS0576    | BEMF  | 0               |
| KW       | 11          | VFD #    | ACS380-040S-03 |            |           | LD    | 0               |
| RPM      | 1500        | S.F.     | 1.00           |            |           | LQ    | 0               |
| Phase/Hz | 3/50        | Rating   | 40C AMB-S1     |            |           | Rs    | 0.4931 Meas L-L |



|                          |                                                                                                        |                                            |                                                   |
|--------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------|---------------------------------------------------|
| <b>BALDOR • RELIANCE</b> | DR By: <u>R &amp; D</u><br>CK By: <u>USTOSAN</u><br>APP By: <u>USJAROB1</u><br>Date: <u>10/11/2024</u> | <b>AC MOTOR<br/>PERFORMANCE<br/>CURVES</b> | <b>37WGA0018</b><br>37-0000-0489<br>Test - 111409 |
|--------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------|---------------------------------------------------|

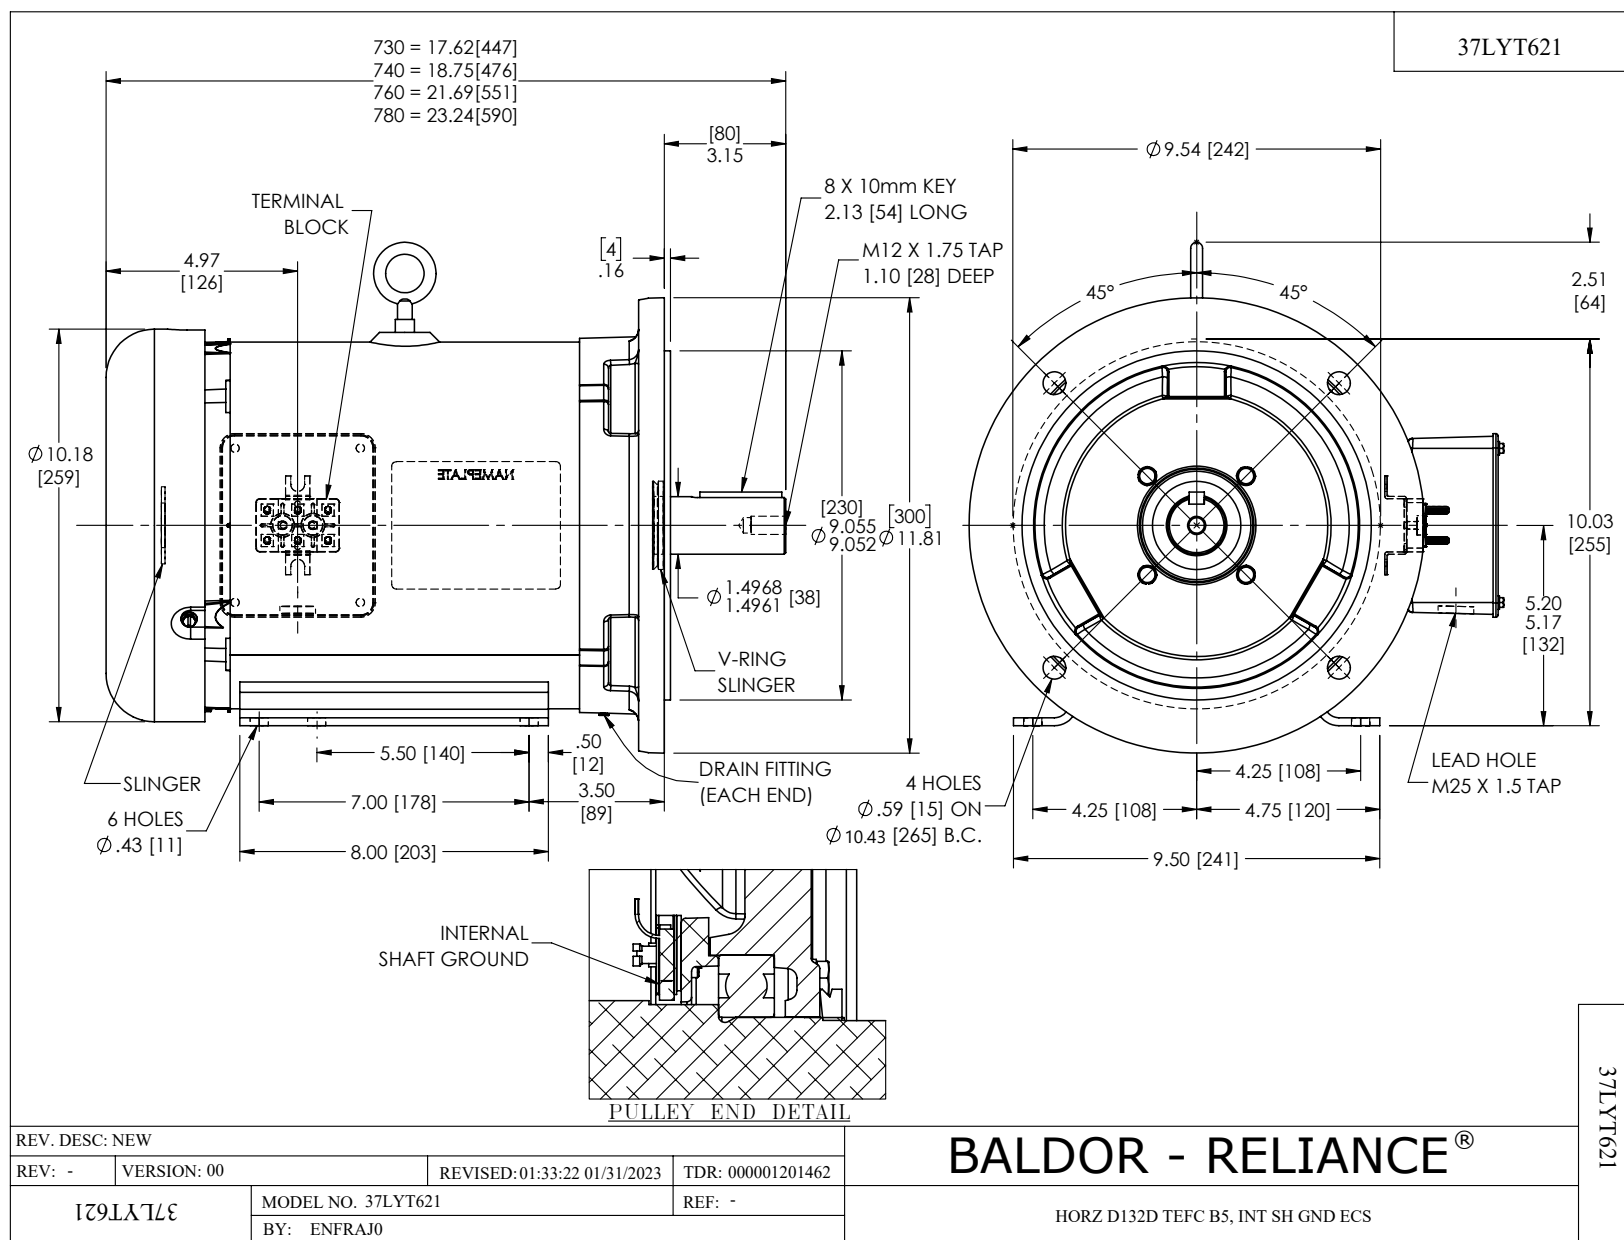

CD0005A25

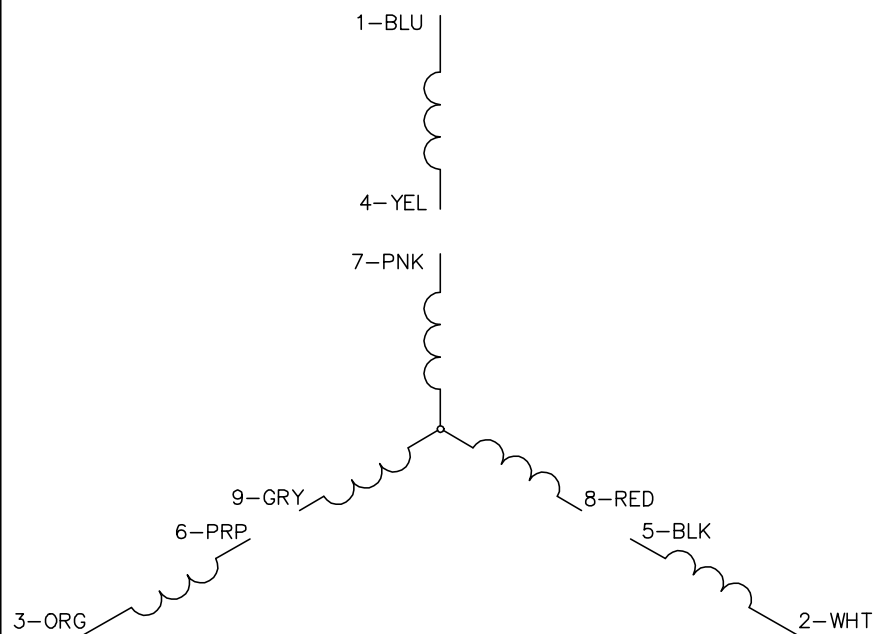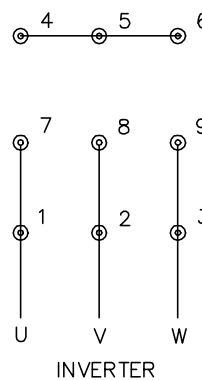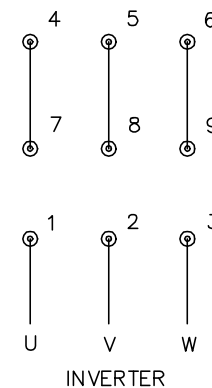LOW VOLTAGE  
(2Y)HIGH VOLTAGE  
(1Y)

## NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: NEW

REV. LTR: -

VERSION: 00

TDR: 000001135746

FILE: \AAA\00253\082

REVISED: 01:10:57 03/30/2020

BY: ENMARSO

MTL: -



BALDOR - RELIANCE®

3PH, DV, 9 LEADS, ECS

SH 1 of 1

CD0005A25