



Customer information packet

ECS101M0K4EF4

4KW, 1500RPM, 3PH, 50HZ, D112S, 3632B, TEFC, F2

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	D112S
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Brushless Wound Field PM Rotor
Output @ Frequency	4.000 KW @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	190.0 V @ 50 HZ 380.0 V @ 50 HZ
Agency Approvals	CE WEEE CULUS
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	5
Current @ Voltage	6.800 A @ 380.0 V 13.600 A @ 190.0 V
Drip Cover	No Drip Cover
Duty Rating	S1
Efficiency @ 100% Load	91.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Frame Prefix	D
Heater Indicator	No Heater
High Voltage Full Load Amps	6.8 a

Part detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	36WGA0020
Layout	36LYT499
Eff. date	07-28-2025
CD Diagram	CD0005A25
Poles	04
Leads	9#12
Proprietary	False
Created date	10-05-2022

Insulation Class	F
Inverter Code	Inverter Duty
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	IEC
Motor Type	3632B
Mounting Arrangement	F2
Number of Poles	4
Overall Length	16.16 IN
Power Factor	97
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.103 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

BALDOR • RELIANCE

EC-Titanium™


CAT. NO.	ECS101M0K4EF4							IC	411
SPEC.	36-0000-3634							YR	***
FRAME	D112S			IP	55	WT.	44	kg	
KW	4	HZ	50	PH	3	DUTY	S1		
INSUL CL	F	CLASS RISE			B	AMB-°C		40	
EFF. CL	IE5		EFF.	91.6		COS Φ	97		
VOLTS	190/380				A	13.6/6.8			
RPM (1/MIN)	1500				RPM (1/MIN) MAX			3000	
BEMF (V)	105/210				Rs (Ω)		0.82/3.30		
Ld (mH)	13.5/54.0			Lq (mH)		47.8/191.0			
INV TYP	VPWM	CHP	50	TO 100		HZ			
	CT	5	TO 50 HZ		VT	1	TO 50 HZ		
MATCHED INV	-								
BEARING	DE	6206			ODE	6205			
SERIAL#	***								



ELECTRIC MOTOR FOR INDUSTRIAL USE

ABB MOTORS AND MECHANICAL INC.
5711 R.S. BOREHAM JR. ST., FORT SMITH, AR. MFG IN U.S.A.


FERRITE ASSISTED
SYNCHRONOUS RELUCTANCE MOTOR
FOR INVERTER USE ONLY

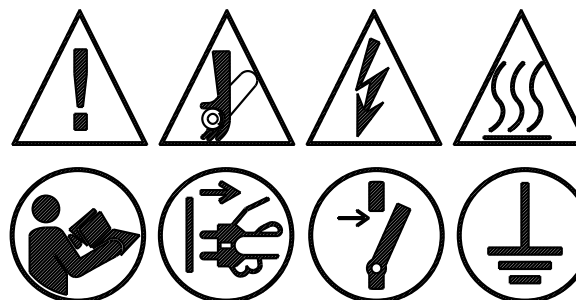

PERMANENT MAGNET MOTOR. WHEN SHAFT IS
ROTATED, VOLTAGE WILL BE GENERATED AT
THE MOTOR TERMINALS.

MOTEUR À AIMANT PERMANENT. LORSQUE
L'ARBRE TOURNE, UNE TENSION SERA
GÉNÉRÉE AUX BORNES DU MOTEUR.

BALDOR-RELIANCE
SHAFT GROUNDING BRUSH INSTALLED



EN/IEC 60034
-1;-5
IEC TS 60034
-30-2

LISTED
E46145

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	13.6/6.8	Max Amps		Cs Diagram	CS0576	BEMF	105/210
KW	4	VFD#	ACS380-040S-09			LD	13.5/54.0
RPM	1500	S.F.	1.00			LQ	47.8/191.0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.3231 Meas. L-L

60034-2-3 Motor Performance at Standardized Operating Points

	RPM	% Speed	LB-FT	% Torque	KW	Efficiency	Loss (% FL)	Watts Loss (W)
P1	1350	90%	18.8	100%	4.8	90.4	9.48%	383
P2	750	50%	18.8	100%	2.7	86.5	7.72%	312
P3	375	25%	18.8	100%	1.3	78.3	6.87%	278
P4	1350	90%	9.4	50%	2.4	92.4	3.67%	149
P5	750	50%	9.4	50%	1.3	89.2	2.98%	121
P6	750	50%	4.7	25%	0.7	89.8	1.40%	57
P7	375	25%	4.7	25%	0.3	84.7	1.12%	45


61800-9-2 PDS Performance at Reference Operating Points

	RPM	% Speed	LB-FT	% Torque	KW	System Efficiency	Loss (% FL)	Watts Loss (W)
P1	1500	100%	18.8	100%	5.4	87.9	13.58%	549
P2	750	50%	18.8	100%	2.7	84.1	9.35%	378
P3	255	17%	18.8	100%	0.9	67.7	8.02%	324
P4	1500	100%	9.4	50%	2.7	91.1	4.85%	196
P5	750	50%	9.4	50%	1.3	86.1	3.99%	162
P6	255	17%	9.4	50%	0.5	71.8	3.30%	133
P7	750	50%	4.7	25%	0.7	85.2	2.14%	87
P8	255	17%	4.7	25%	0.2	71.1	1.71%	69




Points not taken in certified order.

BALDOR • RELIANCE	DR By: <u>R & D</u> CK By: <u>USGAHL</u> APP By: Date: <u>04/09/2025</u>	AC MOTOR PERFORMANCE CURVES	36WGA0020 36-0000-3634 Test - 112234
--------------------------	---	------------------------------------	---

Volts	190/380	Max RPM	3000	Conn Diag.	CD0005A25	Leads	9
Amps	13.6/6.8	Max Amps		Cs Diagram	CS0576	BEMF	105/210
KW	4	VFD #	ACS380-040S-09			LD	13.5/54.0
RPM	1500	S.F.	1.00			LQ	47.8/191.0
Phase/Hz	3/50	Rating	40C AMB-S1			Rs	3.3231 Meas L-L

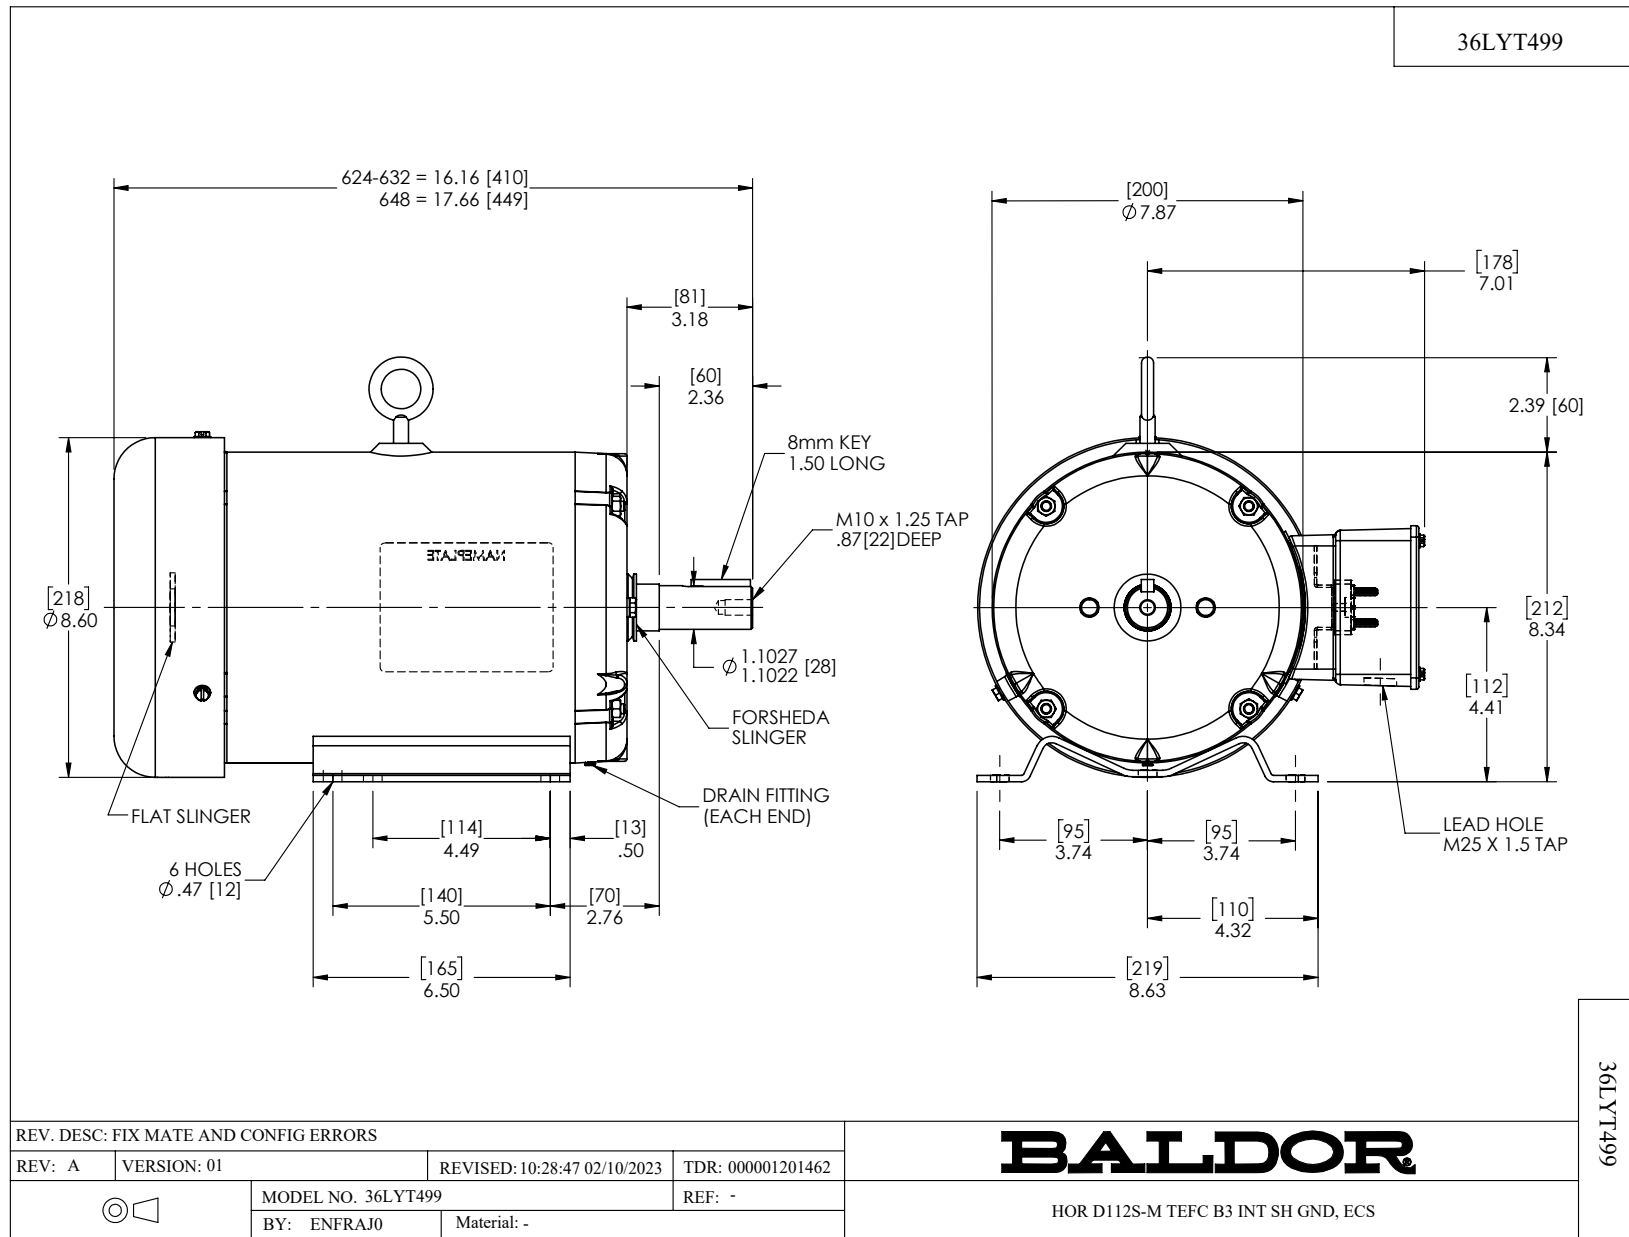

CD0006

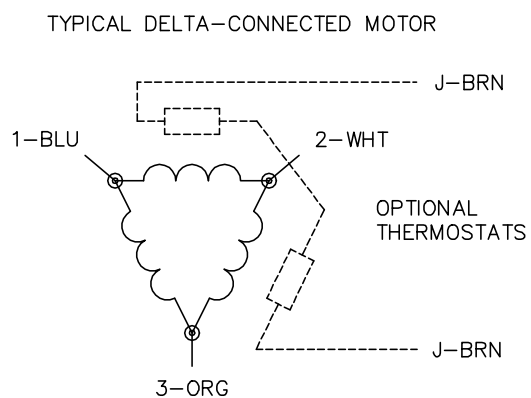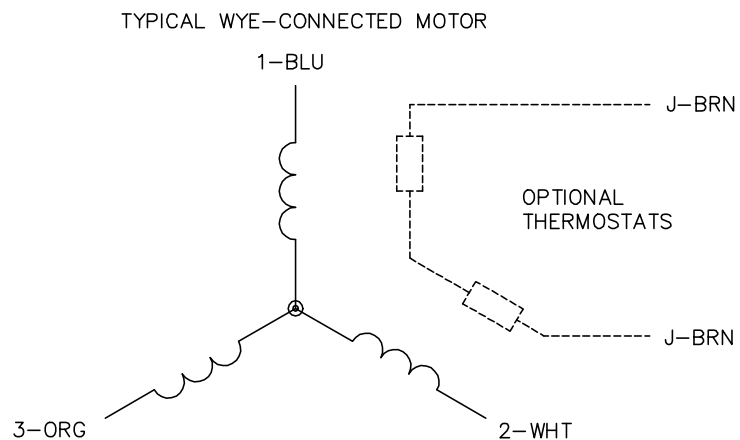

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO




MTL: —

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1

CD0005A25

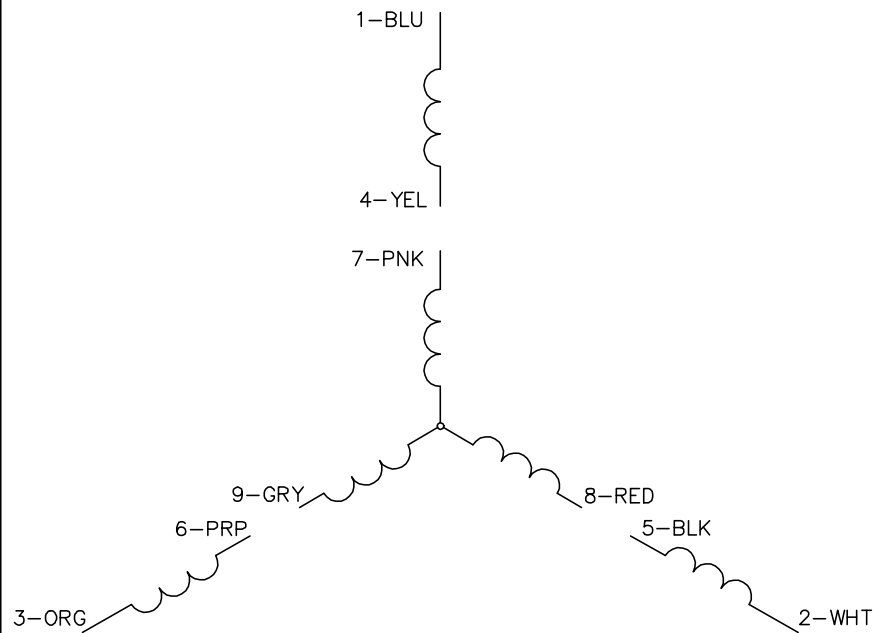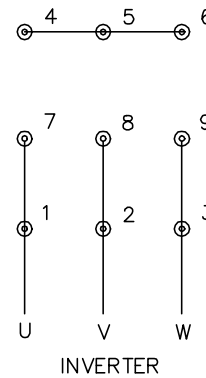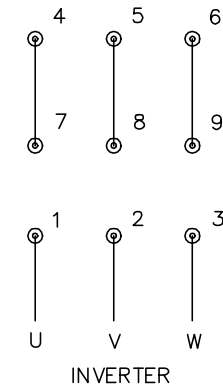LOW VOLTAGE
(2Y)HIGH VOLTAGE
(1Y)

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: NEW	VERSION: 00	TDR: 000001135746
REV. LTR: -	REVISED: 01:10:57 03/30/2020	BY: ENMARSO
FILE: \AAA\00253\082		
MTL: -		

BALDOR - RELIANCE®

3PH, DV, 9 LEADS, ECS

SH 1 of 1

CD0005A25