



Customer information packet

EFM4104T

30HP, 1770RPM, 3PH, 60HZ, 286T, 1056M, TEFC, F2

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	286T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	30.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	76.000 A @ 208.0 V 72.000 A @ 230.0 V 36.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	93.6 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	Y
Type	AC
Mech. spec.	10C156
Base	
Status	PRD/A
Elec. spec.	10WGY758
Layout	10LYC156
Eff. date	06-27-2024
CD Diagram	CD0005
Poles	04
Leads	9#10
Proprietary	False
Created date	04-29-2010

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	36.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 10 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	1056M
Mounting Arrangement	F2
Number of Poles	4
Overall Length	27.81 IN
Power Factor	83
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.15
Shaft Diameter	1.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1770 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat

Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3443L													
CAT.NO.	EFM4104T				CUST. P/N				ENCL				TEFC
SPEC.	10C156Y758G1		CC	010A	FRAME	286T		SER.NO.					
HP	30			CLASS	F	HZ	60						
R.P.M.	1770			PH	3	DES	A						
VOLTS	230/460				CODE	G		ODE BRG	6309	DE BRG	6311		
AMPS	72/36												
RATING	40C AMB-CONT			NEMA NOM. EFF.				93.6		GREASE	POLYREX EM		
P.F.	83	SER.F.	1.15		VPWM INVERTER READY								
HTR-VOLTS	HTR-AMPS		HTR-WATTS										

Accessories

Part number	Description	Multiplier
10-1305	C FACE KIT	A8
10EP1502A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 30986

Typical performance - not guaranteed values

Winding: 10WGY758-R001			Type: 1056M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		30	Full Load Torque		89.1 LB-FT			
Volts		230/460	Start Configuration		direct on line			
Full Load Amps		72/36	Breakdown Torque		270 LB-FT			
R.P.M.		1770	Pull-up Torque		128 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		145 LB-FT		
NEMA Design Code		B	KVA Code	G	Starting Current		235 A	
Service Factor (S.F.)		1.15	No-load Current		15.9 A			
NEMA Nom. Eff.		93.6	Power Factor		83	Line-line Res. @ 25°C		0.226 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		57°C	
S.F. Amps					Temp. Rise @ S.F. Load		70°C	
					Locked-rotor Power Factor		32	
					Rotor inertia		4.45 LB-FT2	

Load Characteristics 460 V, 60 Hz, 30 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	44	66	75	83	83	83	83
Efficiency	90.6	93.7	94.3	94	93.2	93	93.6
Speed	1794	1787	1781	1774	1766	1757	1769
Line amperes	17.9	23	30.1	36.2	45.3	54.5	41.7


ABB Motors and Mechanical Inc.


WINDING # 10WGY758

Typical performance - not guaranteed values.


30 HP 3 PH 60 HZ 1770 RPM 460 V 1056M

TORQUES (LB-FT): PO=270 PU=128 LR=145 LRA=235

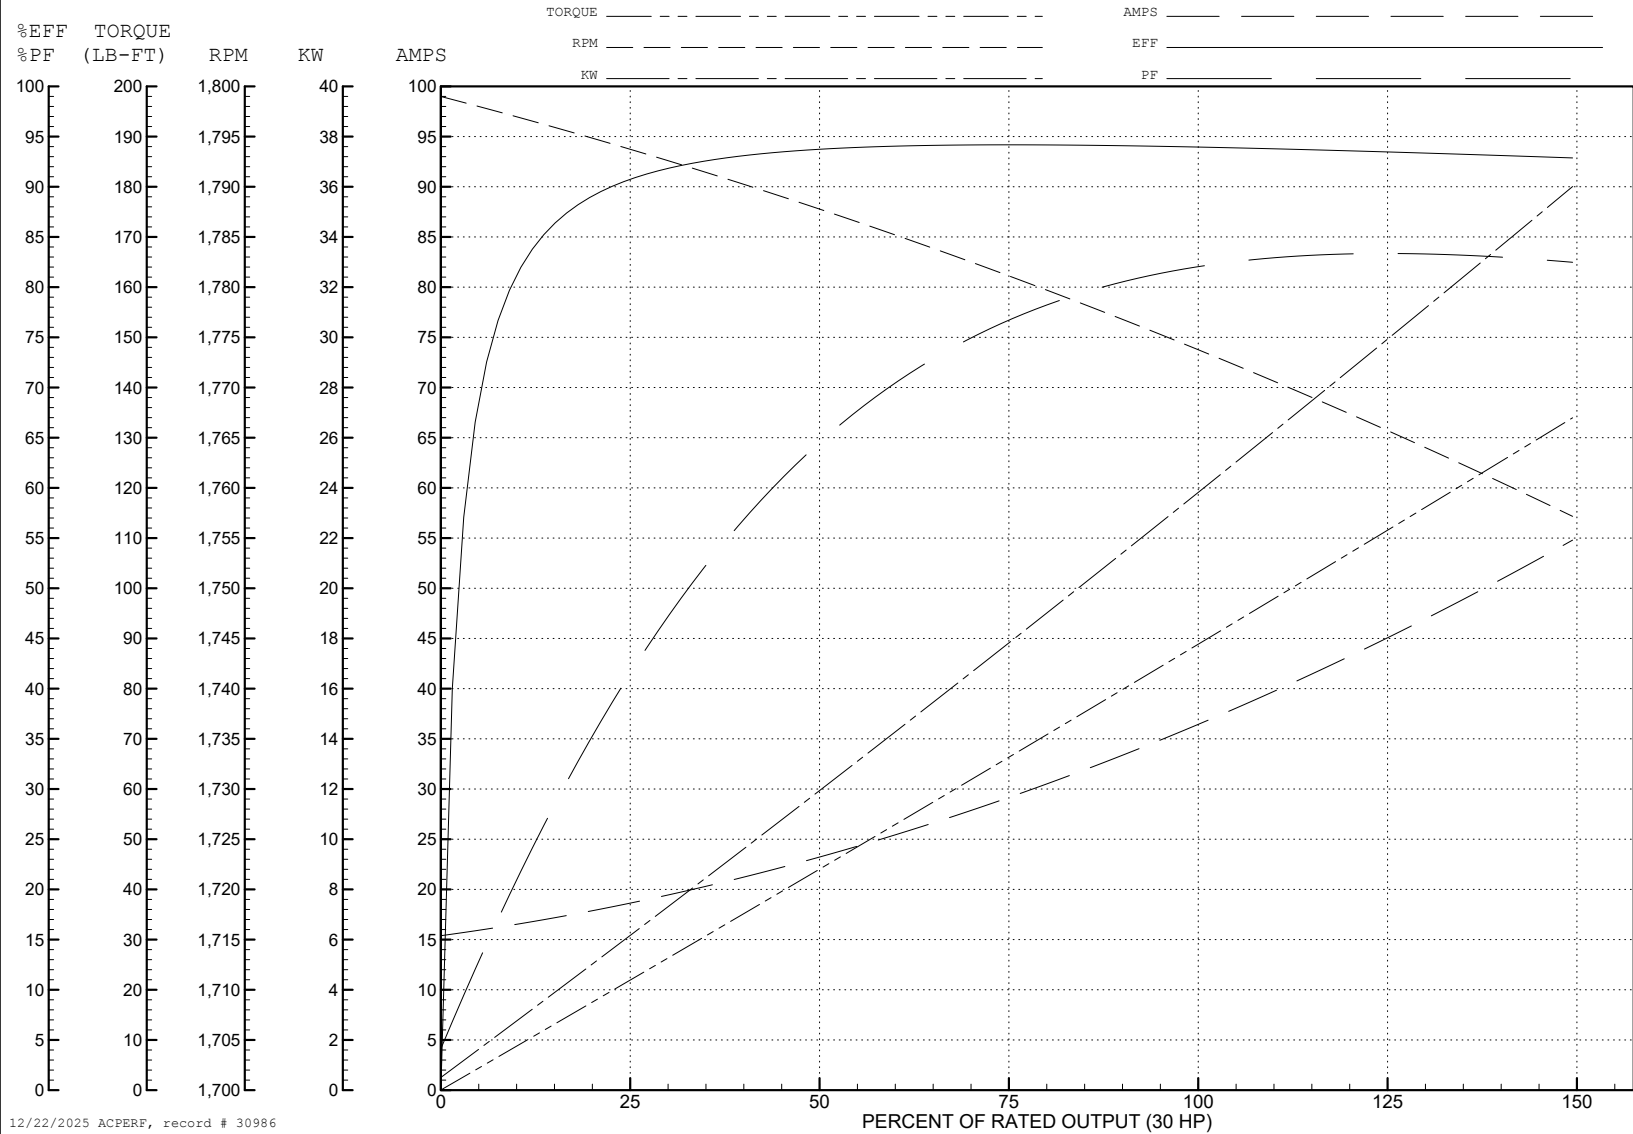

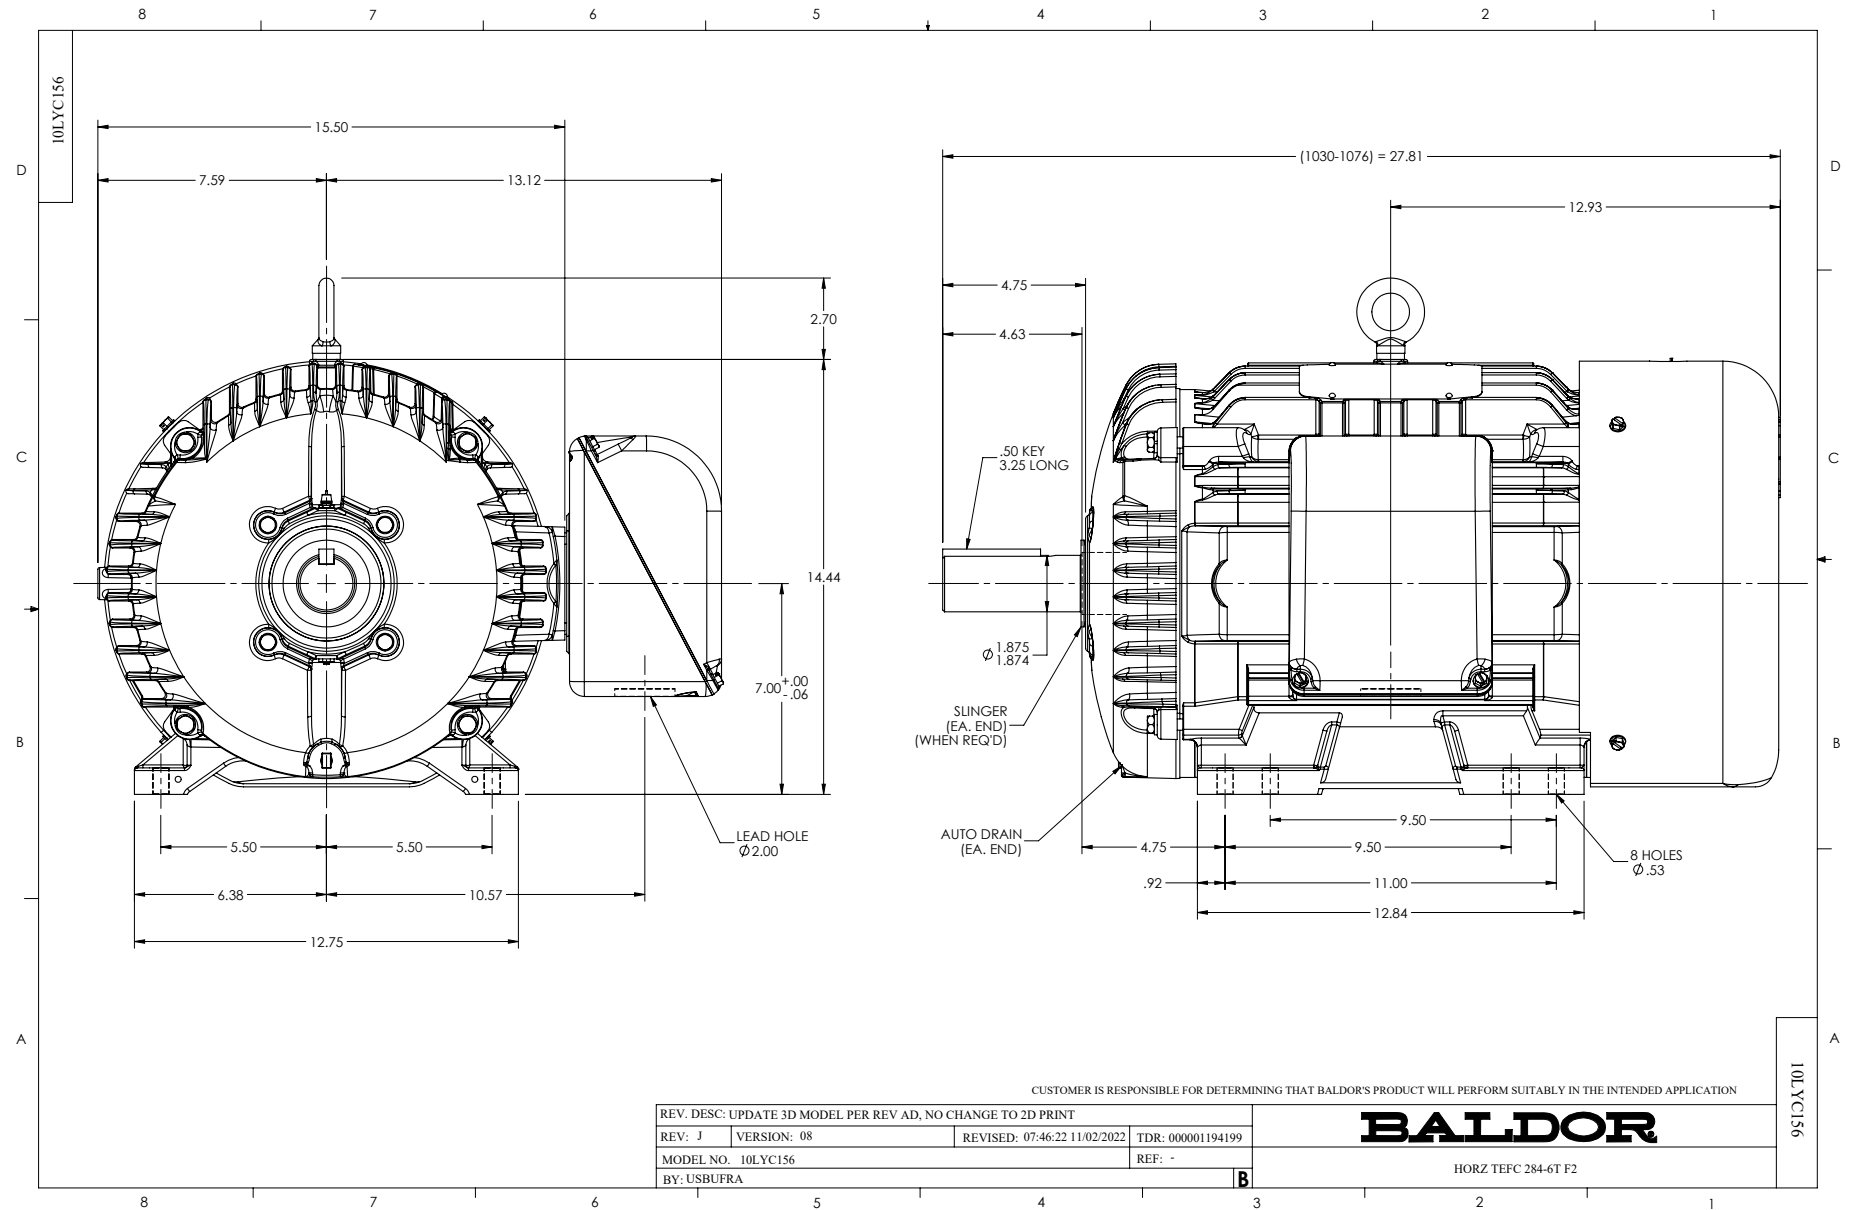

CD0005

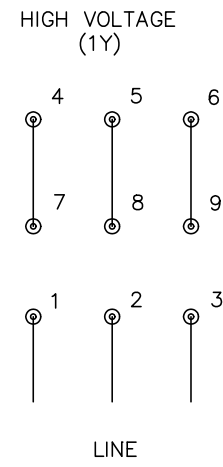

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005