



Customer information packet

EJMM3713T-5

15HP, 3500RPM, 3PH, 60HZ, 215JM, 3752M, TEFC, F

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	215JM
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR CSA CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.400 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	13.4 a
Insulation Class	F

Part detail

Revision	G
Type	AC
Mech. spec.	37J786
Base	
Status	PRD/A
Elec. spec.	37WGR498
Layout	37LYJ786
Eff. date	05-02-2024
CD Diagram	CD0006
Poles	02
Leads	3#14
Proprietary	False
Created date	08-18-2015

Inverter Code	Inverter Ready
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3752M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	22.38 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3500 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441L											
CAT.NO.	EJMM3713T-5										
SPEC.	37J786R498G1										
HP	15										
VOLTS	575										
AMP	13.4										
RPM	3500										
FRAME	215JM		HZ	60			PH	3			
SER.F.	1.15	CODE	H	DES	B	CL	F				
NEMA-NOM-EFF	91	PF	90								
RATING	40C AMB-CONT										
CC	010A										
DE	6309		ODE	6206							
ENCL	TEFC	SN									
VPWM INVERTER READY											
CT6-60H(10:1)VT3-60H(20:1											

AC Induction Motor Performance Data

Record # 42280

Typical performance - not guaranteed values

Winding: 37WGR498-R001				Type: 3752M		Enclosure: TEFC	
Nameplate Data				575 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		15		Full Load Torque		22.2 LB-FT	
Volts		575		Start Configuration		direct on line	
Full Load Amps		13.4		Breakdown Torque		79.5 LB-FT	
R.P.M.		3500		Pull-up Torque		30.1 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		43.2 LB-FT	
NEMA Design Code		B	KVA Code	H	Starting Current		91.3 A
Service Factor (S.F.)		1.15		No-load Current		3.02 A	
NEMA Nom. Eff.		91	Power Factor	90	Line-line Res. @ 25°C		0.886 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		73°C	
S.F. Amps				Temp. Rise @ S.F. Load		92°C	
				Locked-rotor Power Factor		29.6	
				Rotor inertia		0.474 LB-FT2	

Load Characteristics 575 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	69	86	90	92	91	91	92
Efficiency	88.1	91.9	91.7	91.2	90	88.6	90.4
Speed	3574	3548	3519	3489	3457	3419	3497
Line amperes	4.26	6.83	10	13.2	16.8	20.7	15.6


ABB Motors and Mechanical Inc.


WINDING # 37WGR498

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 3500 RPM 575 V 3752M

TORQUES (LB-FT) : PO=79.5 PU=30.1 LR=43.2 LRA=91.3

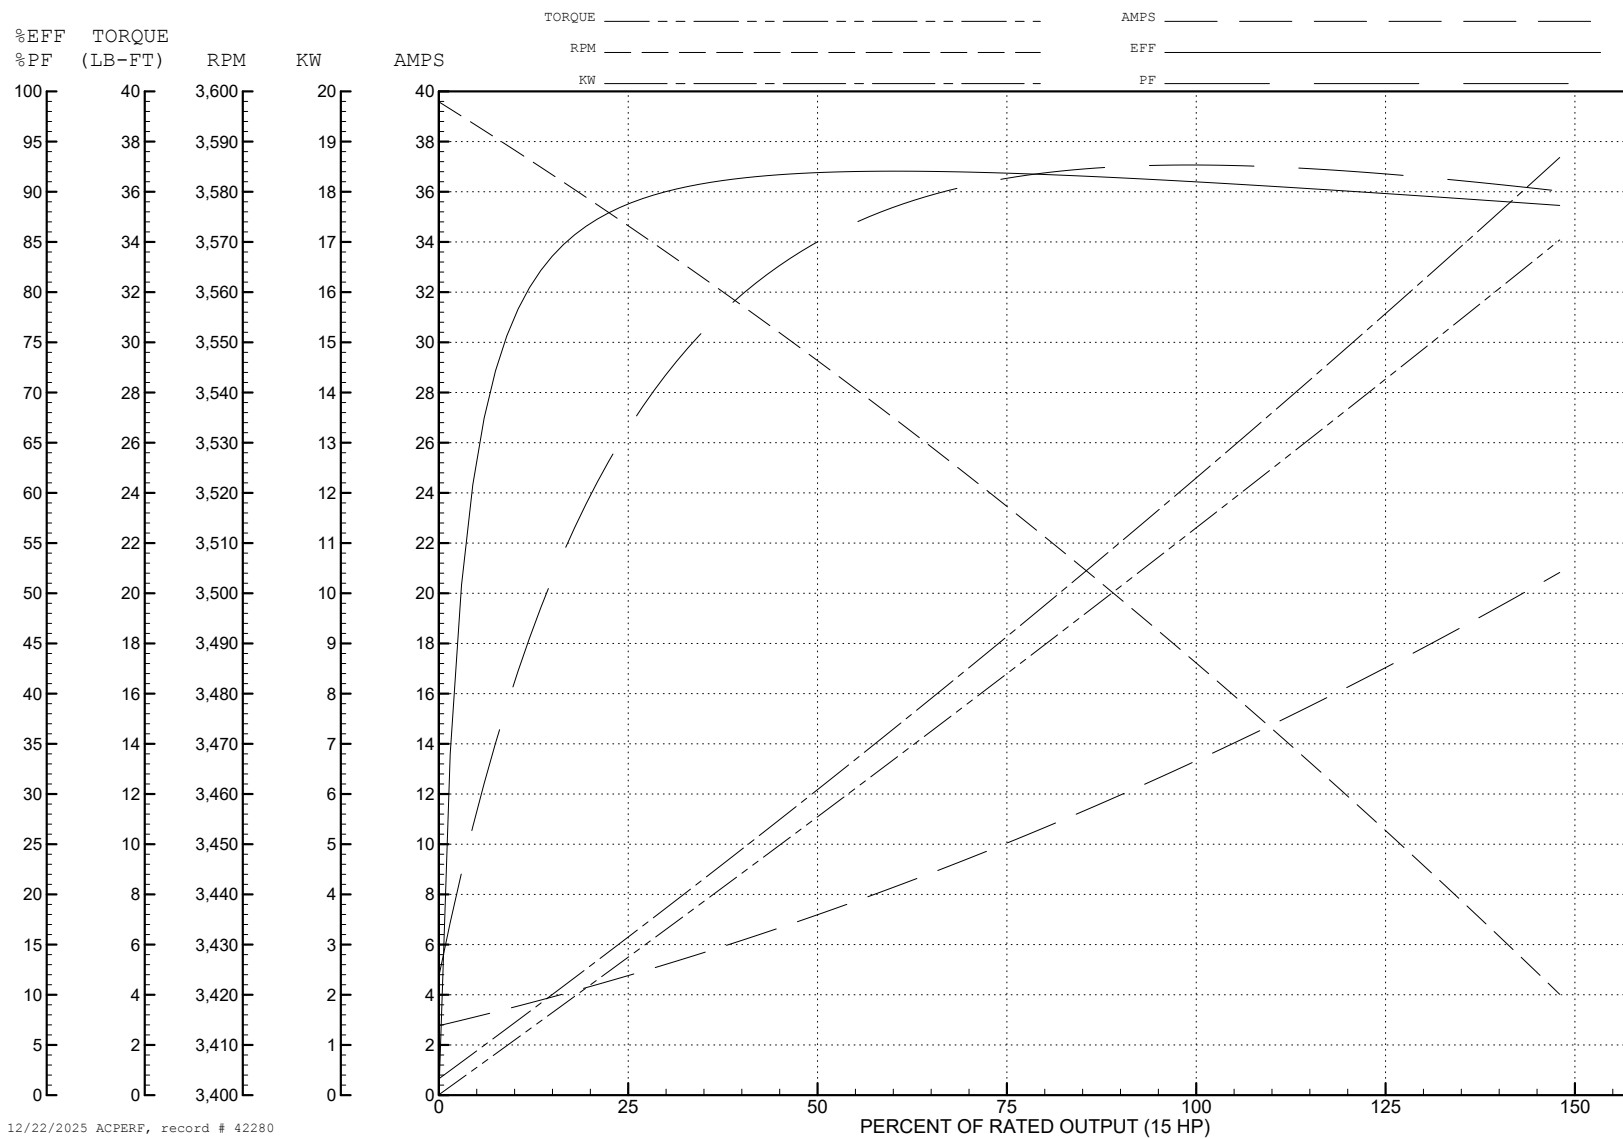

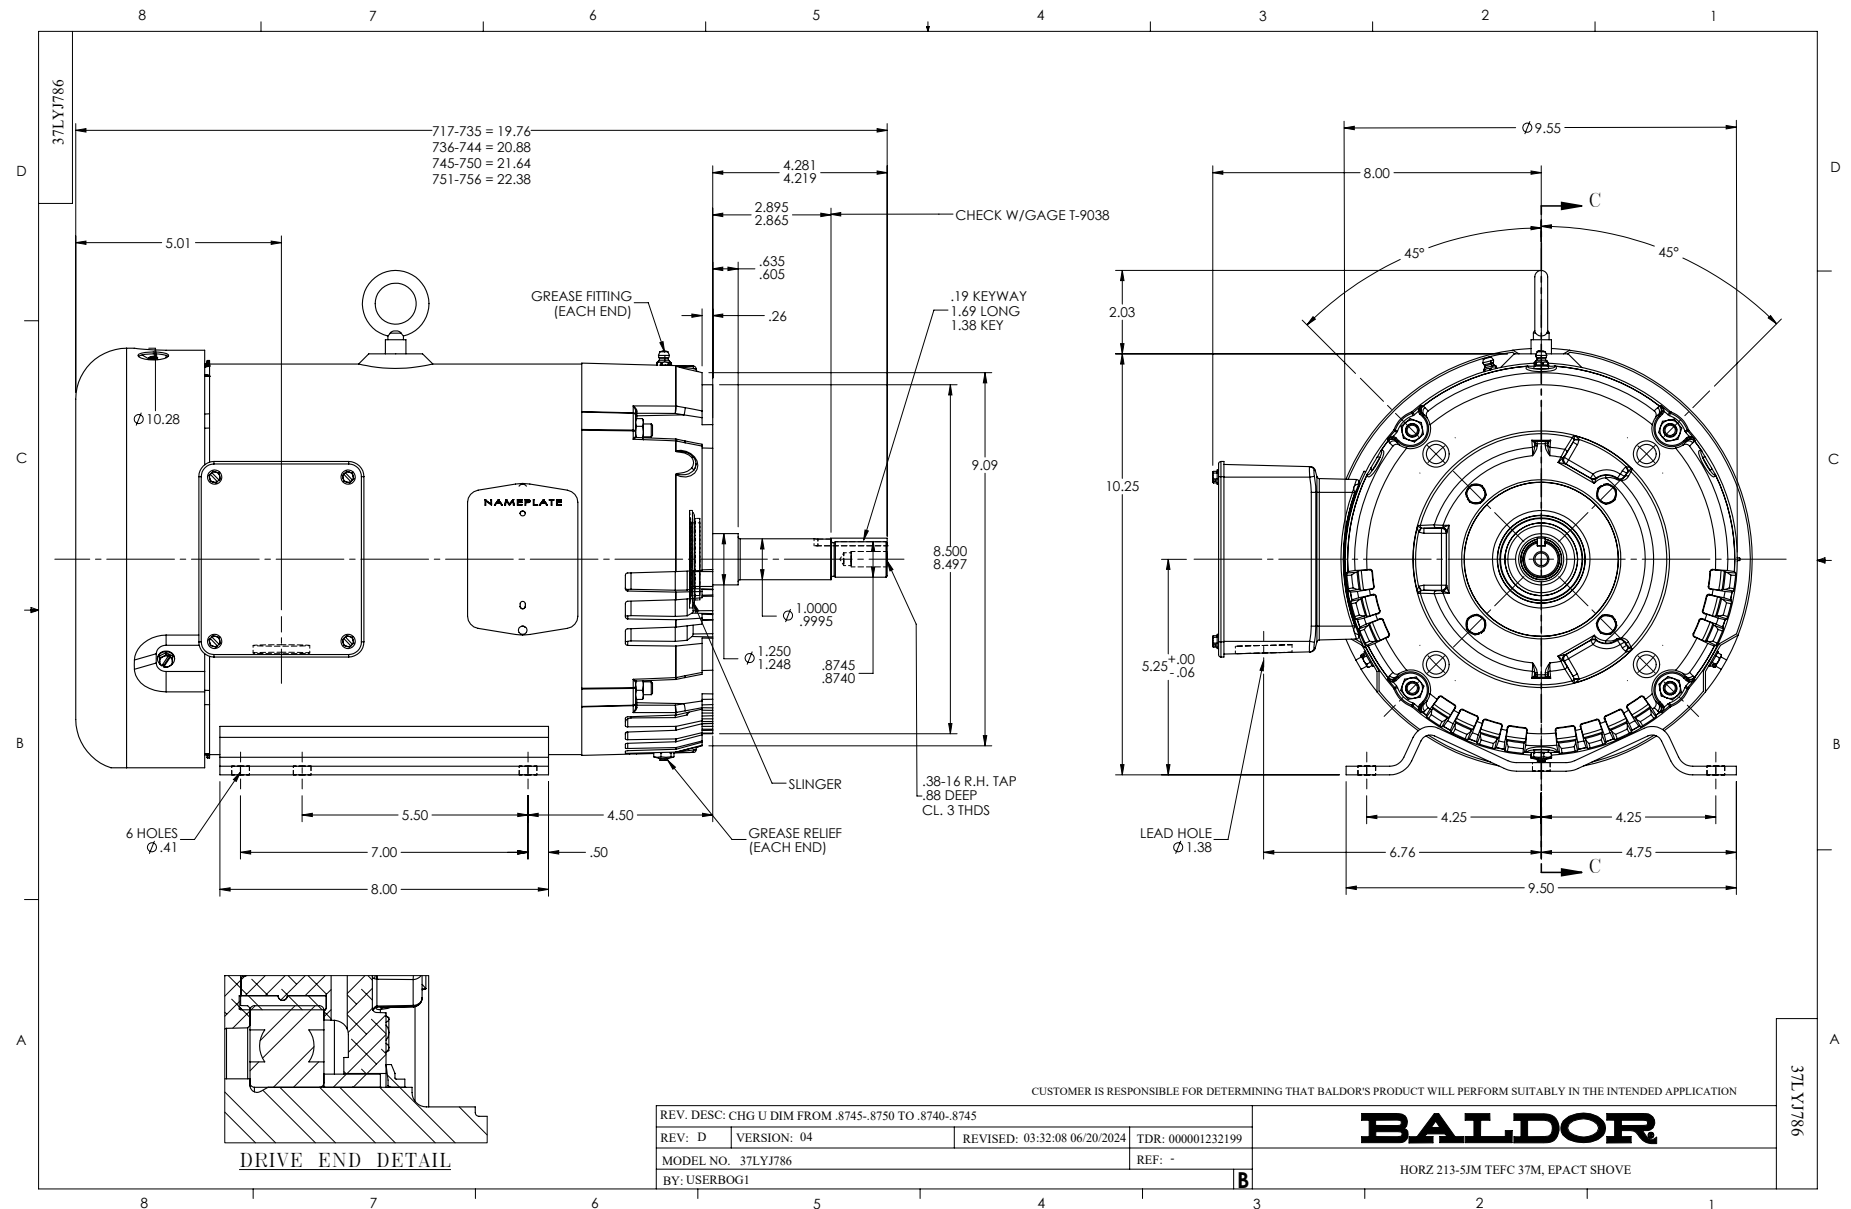

CD0006

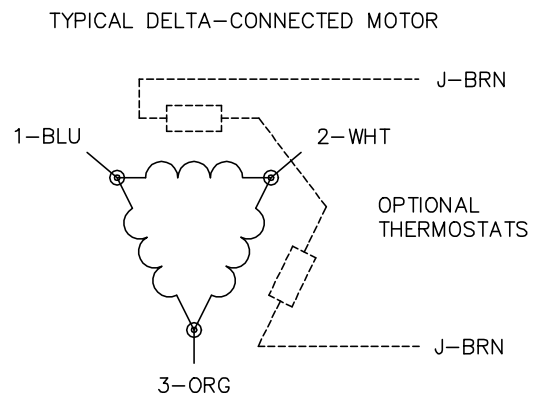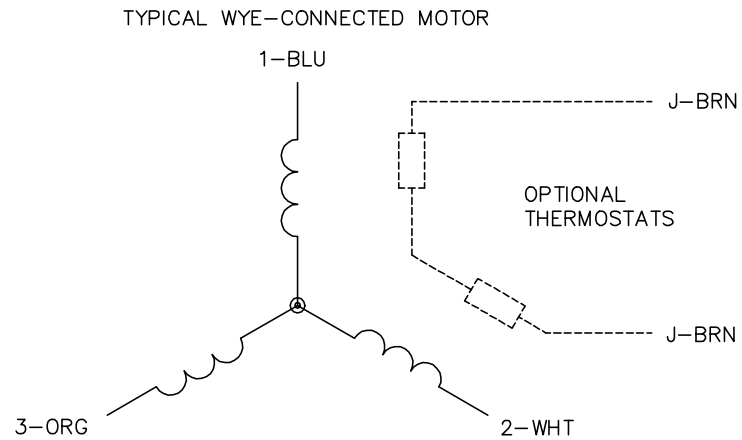

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007

REV. LTR: E

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\141

REVISED: 10:24:49 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1