



Customer information packet

EJPM3211T

3HP/1760RPM/3PH/OPSB/NEMA 182JP

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	182JP
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	8.400 A @ 230.0 V 8.500 A @ 208.0 V 4.200 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard

Part detail

Revision	J
Type	AC
Mech. spec.	36J514
Base	
Status	PRD/A
Elec. spec.	36WGS658
Layout	36LYJ514
Eff. date	06-12-2025
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	05-27-2015

Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.2 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3630M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.56 IN
Power Factor	74
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	Included
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1765 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor

Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3553LUA									
CAT.NO.	EJPM3211T								
SPEC.	36J514S658G1								
HP	3								
VOLTS	230/460								
AMPS	8.4/4.2								
RPM	1765								
FRAME	182JP		HZ	60			PH	3	
SF	1.15		CODE	K	DES	B	CLASS	F	
NEMA NOM. EFF	89.5		PF	74					
RATING	40C AMB-CONT								
CC	010A								
ENCL	OPSB		SN						
DE	6207		ODE	6205					
VPWM INVERTER READY			SFA 9.5/4.7						
CT30-60(2:1) VT3-60(20:1)									
USABLE AT	50Hz 3HP 190/380V 9.8/4.9A							SF1.0	

AC Induction Motor Performance Data

Record # 33604

Typical performance - not guaranteed values

Winding: 36WGS658-R001			Type: 3630M		Enclosure: OPSB		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		3	Full Load Torque		8.87 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		8.4/4.2	Breakdown Torque		37.4 LB-FT		
R.P.M.		1765	Pull-up Torque		17.3 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		21.2 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		32.3 A
Service Factor (S.F.)		1.15	No-load Current		2.43 A		
NEMA Nom. Eff.		89.5	Power Factor	74	Line-line Res. @ 25°C		3.8716 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		24°C
S.F. Amps					Temp. Rise @ S.F. Load		28°C
					Locked-rotor Power Factor		43
					Rotor inertia		0.279 LB-FT2

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	33	53	66	73	79	81	77
Efficiency	80.2	87.5	89.5	89.7	89.5	88.7	89.6
Speed	1791.1	1783	1774.5	1765.5	1755.7	1744.8	1760
Line amperes	2.6	2.99	3.54	4.25	4.97	5.83	4.68


ABB Motors and Mechanical Inc.


WINDING # 36WGS658

Typical performance - not guaranteed values.


3 HP 3 PH 60 HZ 1765 RPM 460 V 3630M

TORQUES (LB-FT): PO=37.4 PU=17.3 LR=21.2 LRA=32.3

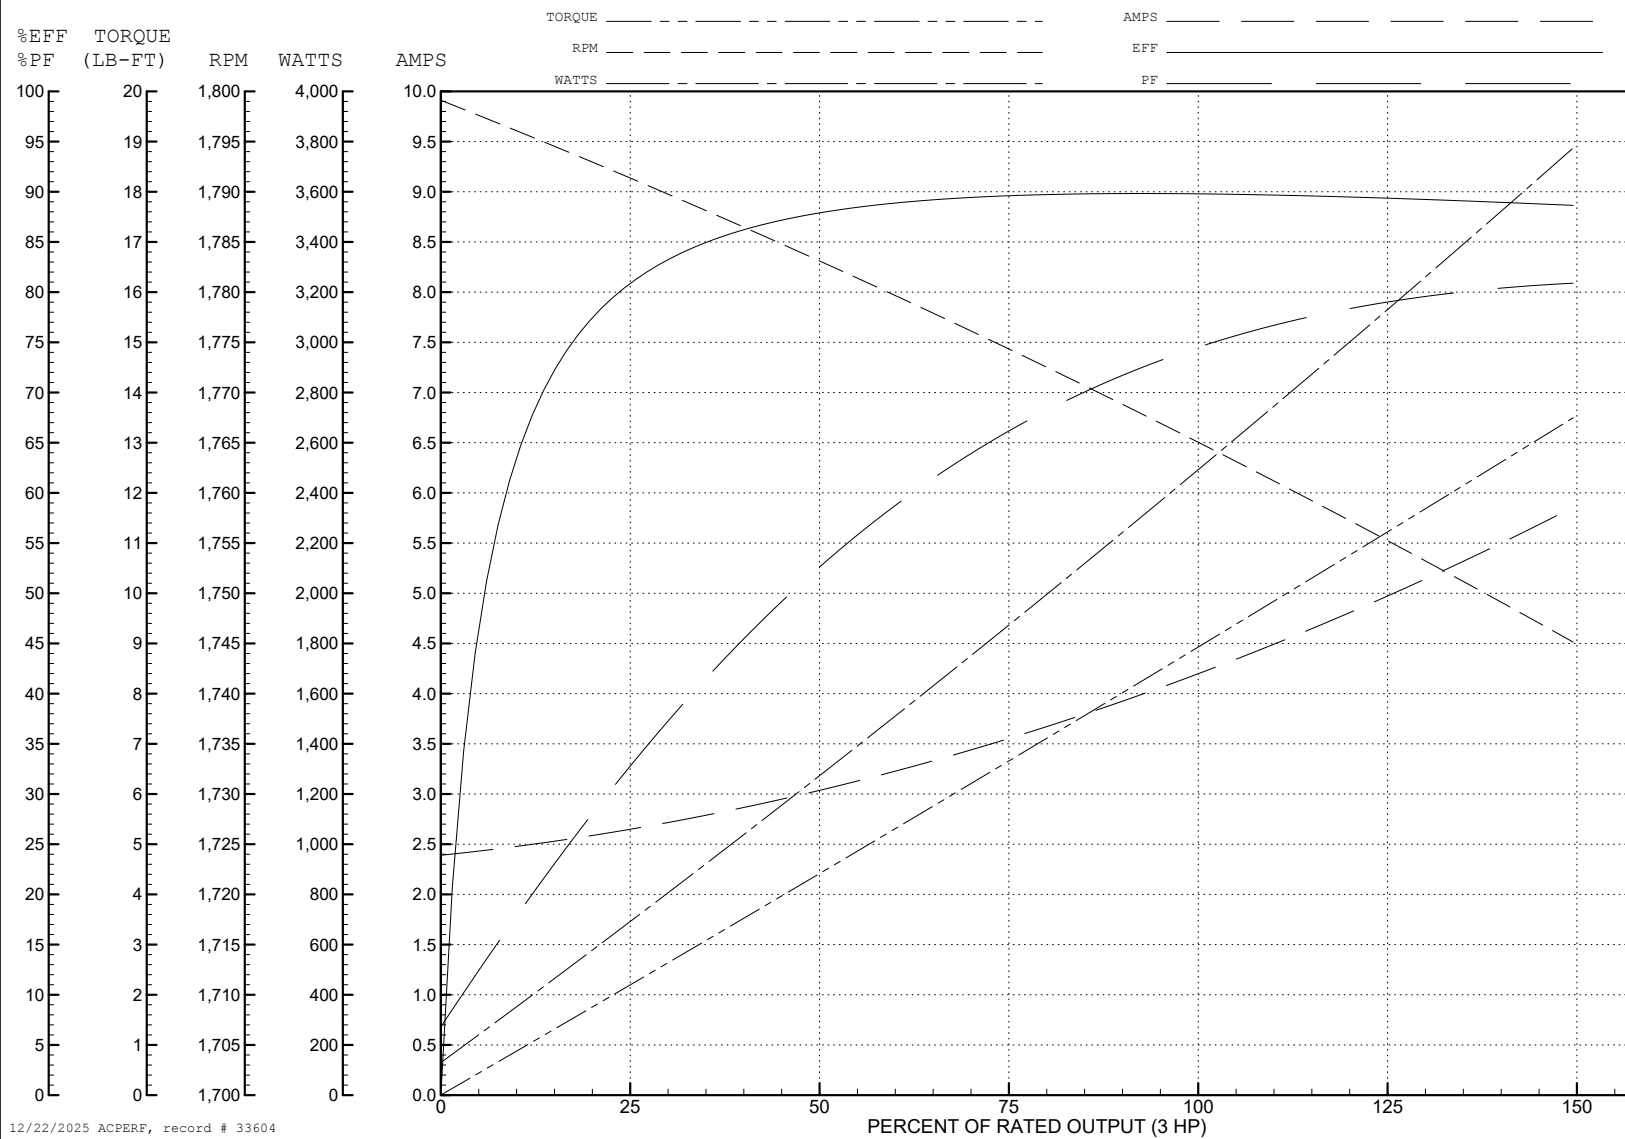

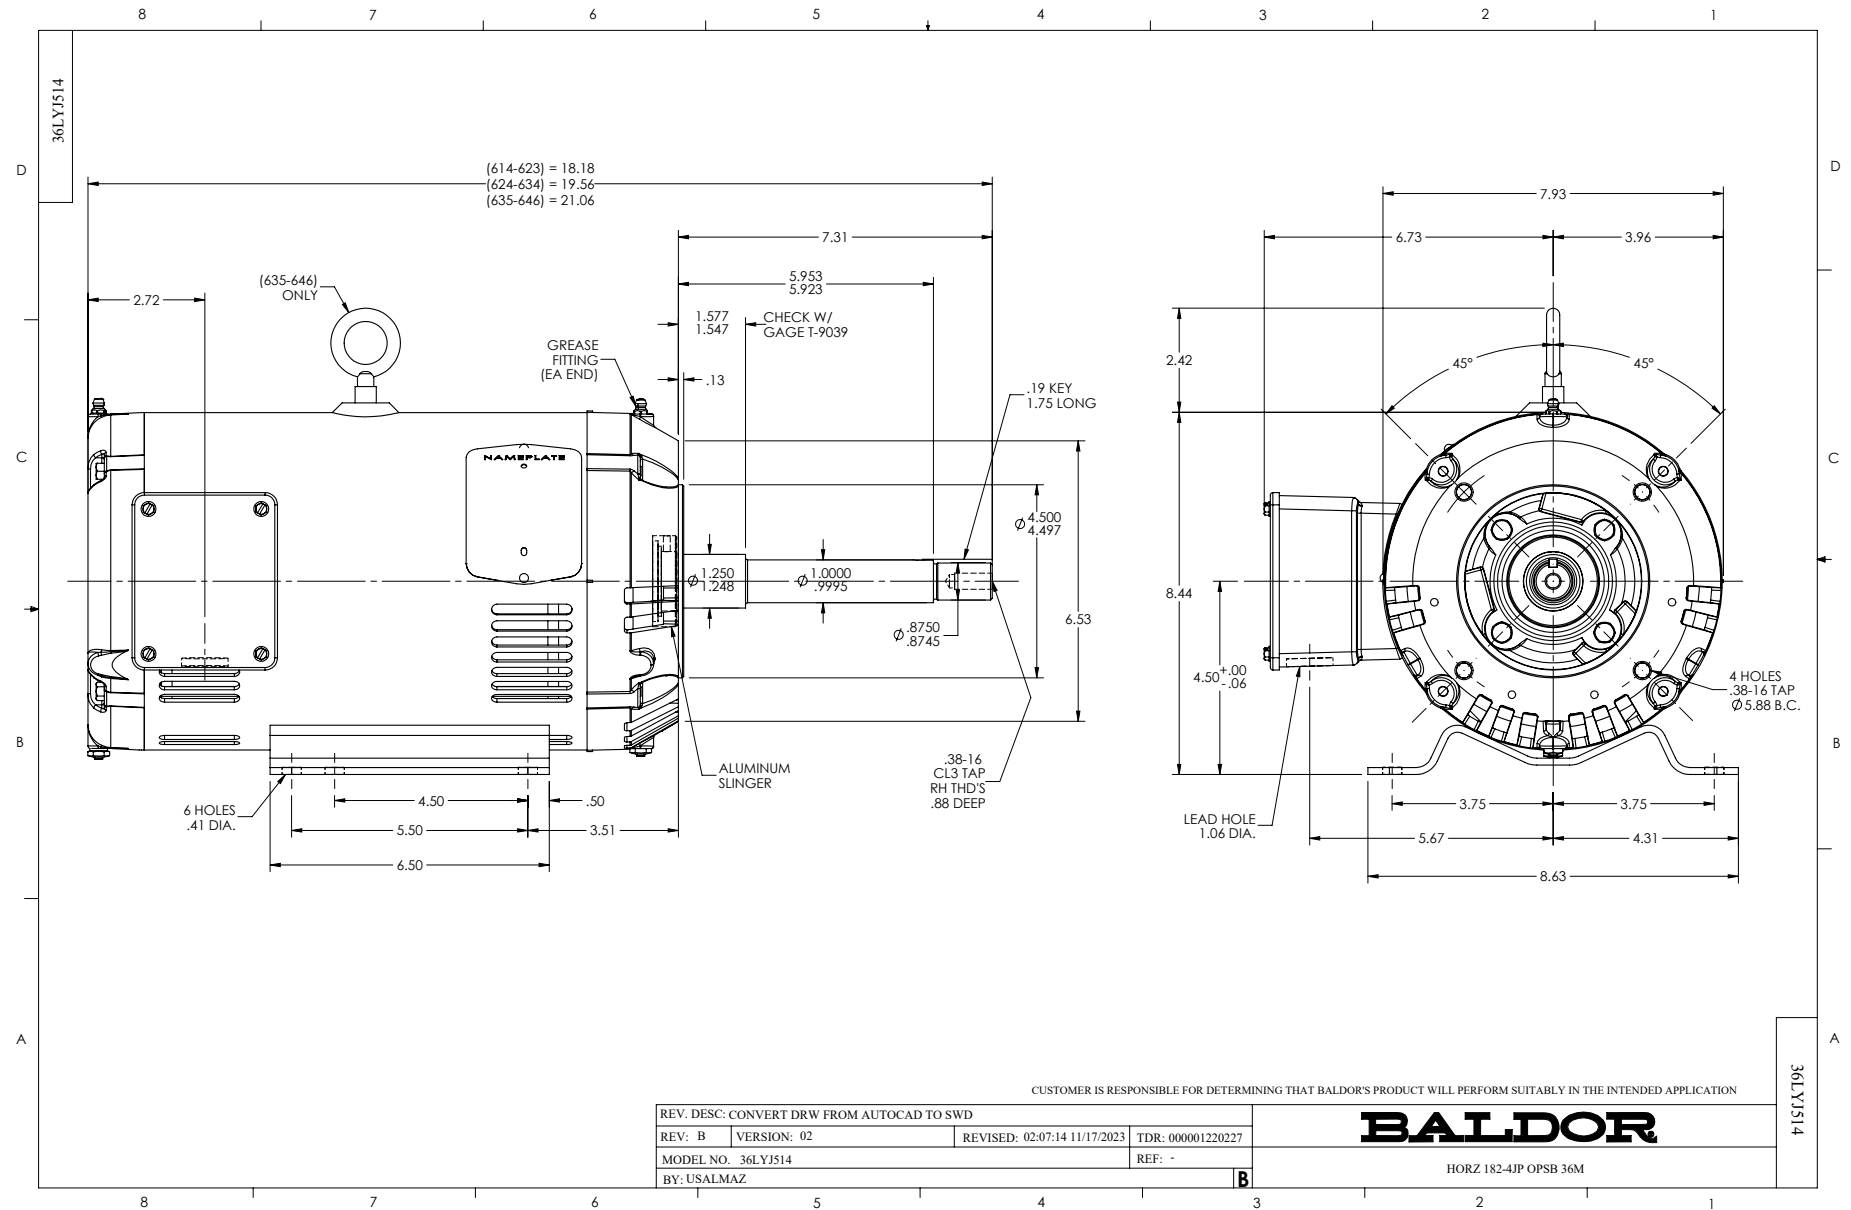

CD0005

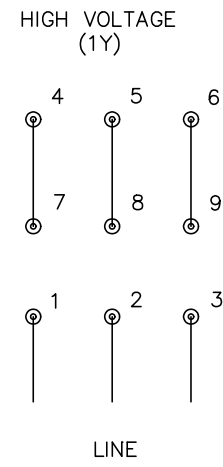

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005