



Customer information packet

EL3609T

3HP, 1755RPM, 1PH, 60HZ, 184T, 3640LC, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	3.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	11.800 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	85.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	11.8 a

Part detail

Revision	AV
Type	AC
Mech. spec.	36E004
Base	
Status	PRD/A
Elec. spec.	36WGY528
Layout	36LYE004
Eff. date	07-17-2025
CD Diagram	CD0017A02
Poles	04
Leads	2#14 A PH,2#16 B PH
Proprietary	False
Created date	01-01-0001

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	H
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 14 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3640LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.06 IN
Power Factor	96
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1755 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2116L											
CAT.NO.	EL3609T										
SPEC.	36E004Y528E7										
HP	3										
VOLTS	230										
AMP	11.8										
RPM	1755										
FRAME	184T			HZ	60			PH	1		
SER.F.	1.15	CODE	H	DES	L	CL	F				
NEMA-NOM-EFF	85.5	PF	96								
RATING	40C AMB-CONT										
CC											
DE	6206	ODE		6205							
ENCL	TEFC	SN									

Accessories

Part number	Description	Multiplier
36-3301	C FACE KIT	A8
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8

AC Induction Motor Performance Data

Record # 11392

Typical performance - not guaranteed values

Winding: 36WGY528-R001			Type: 3640LC		Enclosure: TEFC		
Nameplate Data			230 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		3	Full Load Torque		9 LB-FT		
Volts		230	Start Configuration		direct on line		
Full Load Amps		11.8	Breakdown Torque		21 LB-FT		
R.P.M.		1755	Pull-up Torque		18 LB-FT		
Hz	60	Phase	1	Locked-rotor Torque		25 LB-FT	
NEMA Design Code		L	KVA Code	H	Starting Current		85 A
Service Factor (S.F.)		1.15	No-load Current		1.9 A		
NEMA Nom. Eff.		85.5	Power Factor	96	Line-line Res. @ 25°C		0.662 Ω A Ph 1.52 Ω B Ph
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		59°C
S.F. Amps					Temp. Rise @ S.F. Load		75°C

Load Characteristics 230 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	92	96	97	97	96	96	95
Efficiency	71	83.1	85.9	85.7	83.6	80	84.4
Speed	1787	1775	1762	1745	1728	1705	1735
Line amperes	3.7	6.1	8.9	11.8	15.3	19.5	14.1


ABB Motors and Mechanical Inc.


WINDING # 36WGY528

Typical performance - not guaranteed values.


3 HP 1 PH 60 HZ 1755 RPM 230 V 3640LC

TORQUES (LB-FT): PO=21 PU=18 LR=25 LRA=85

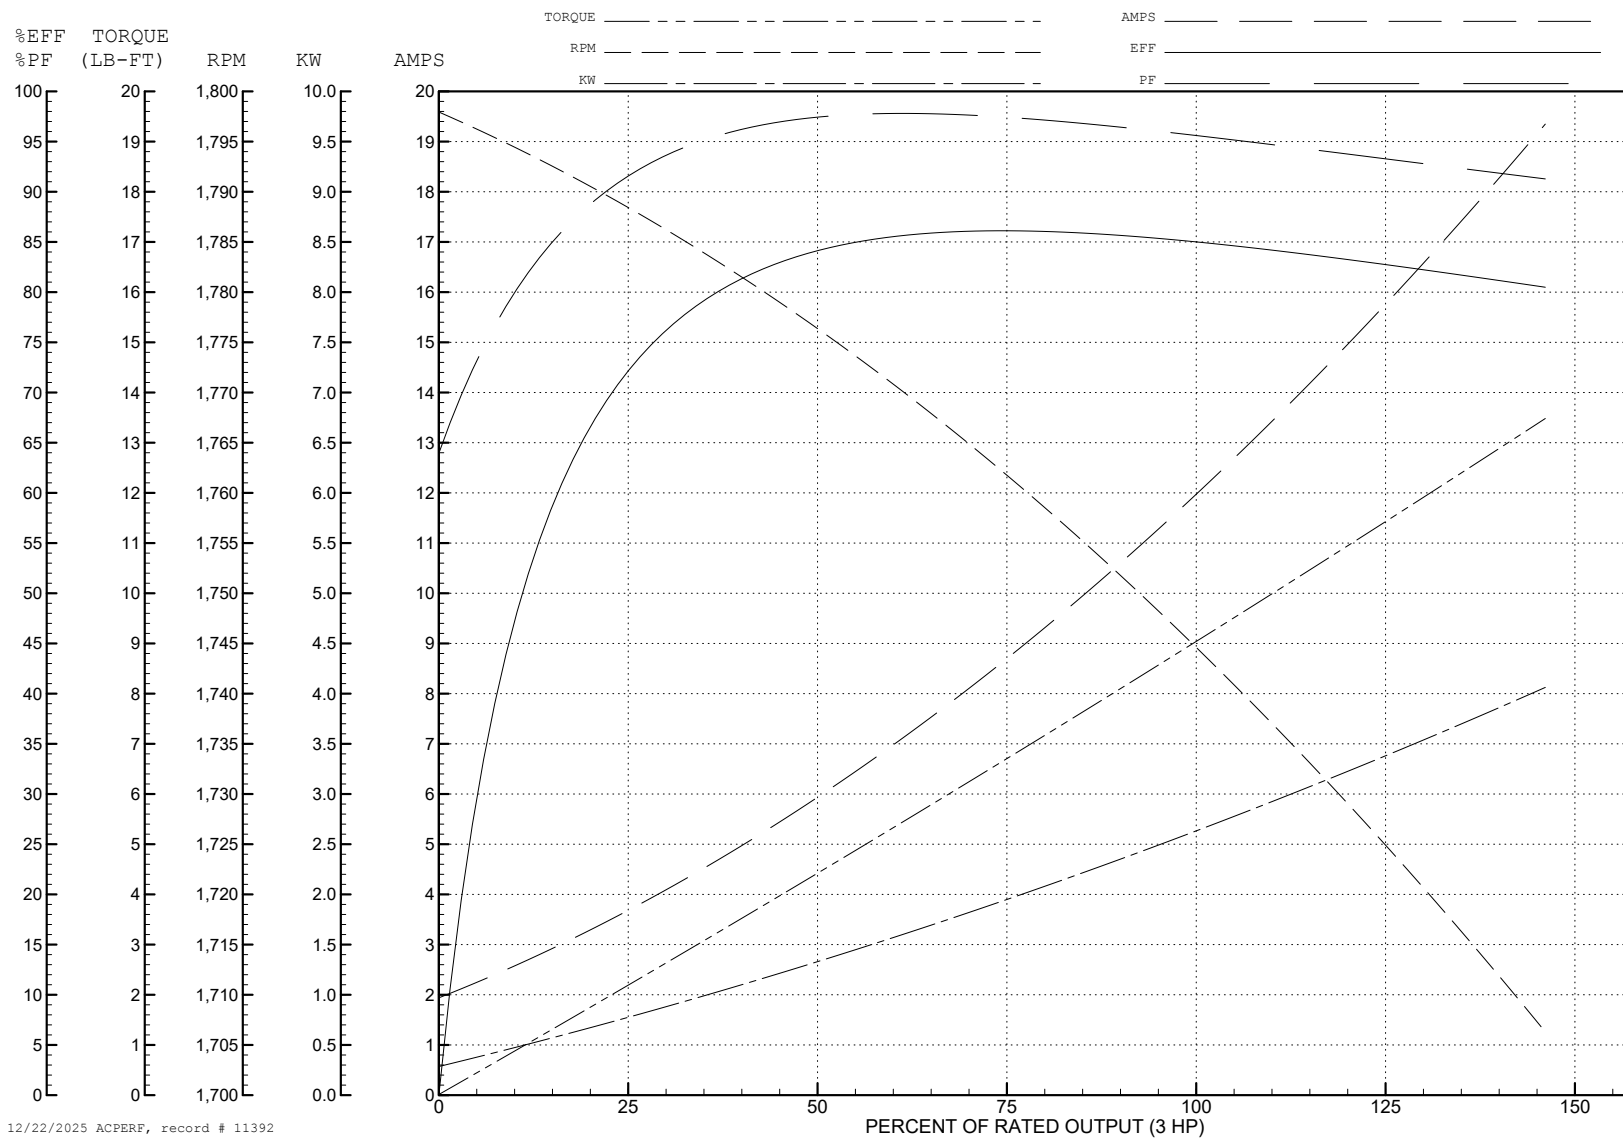

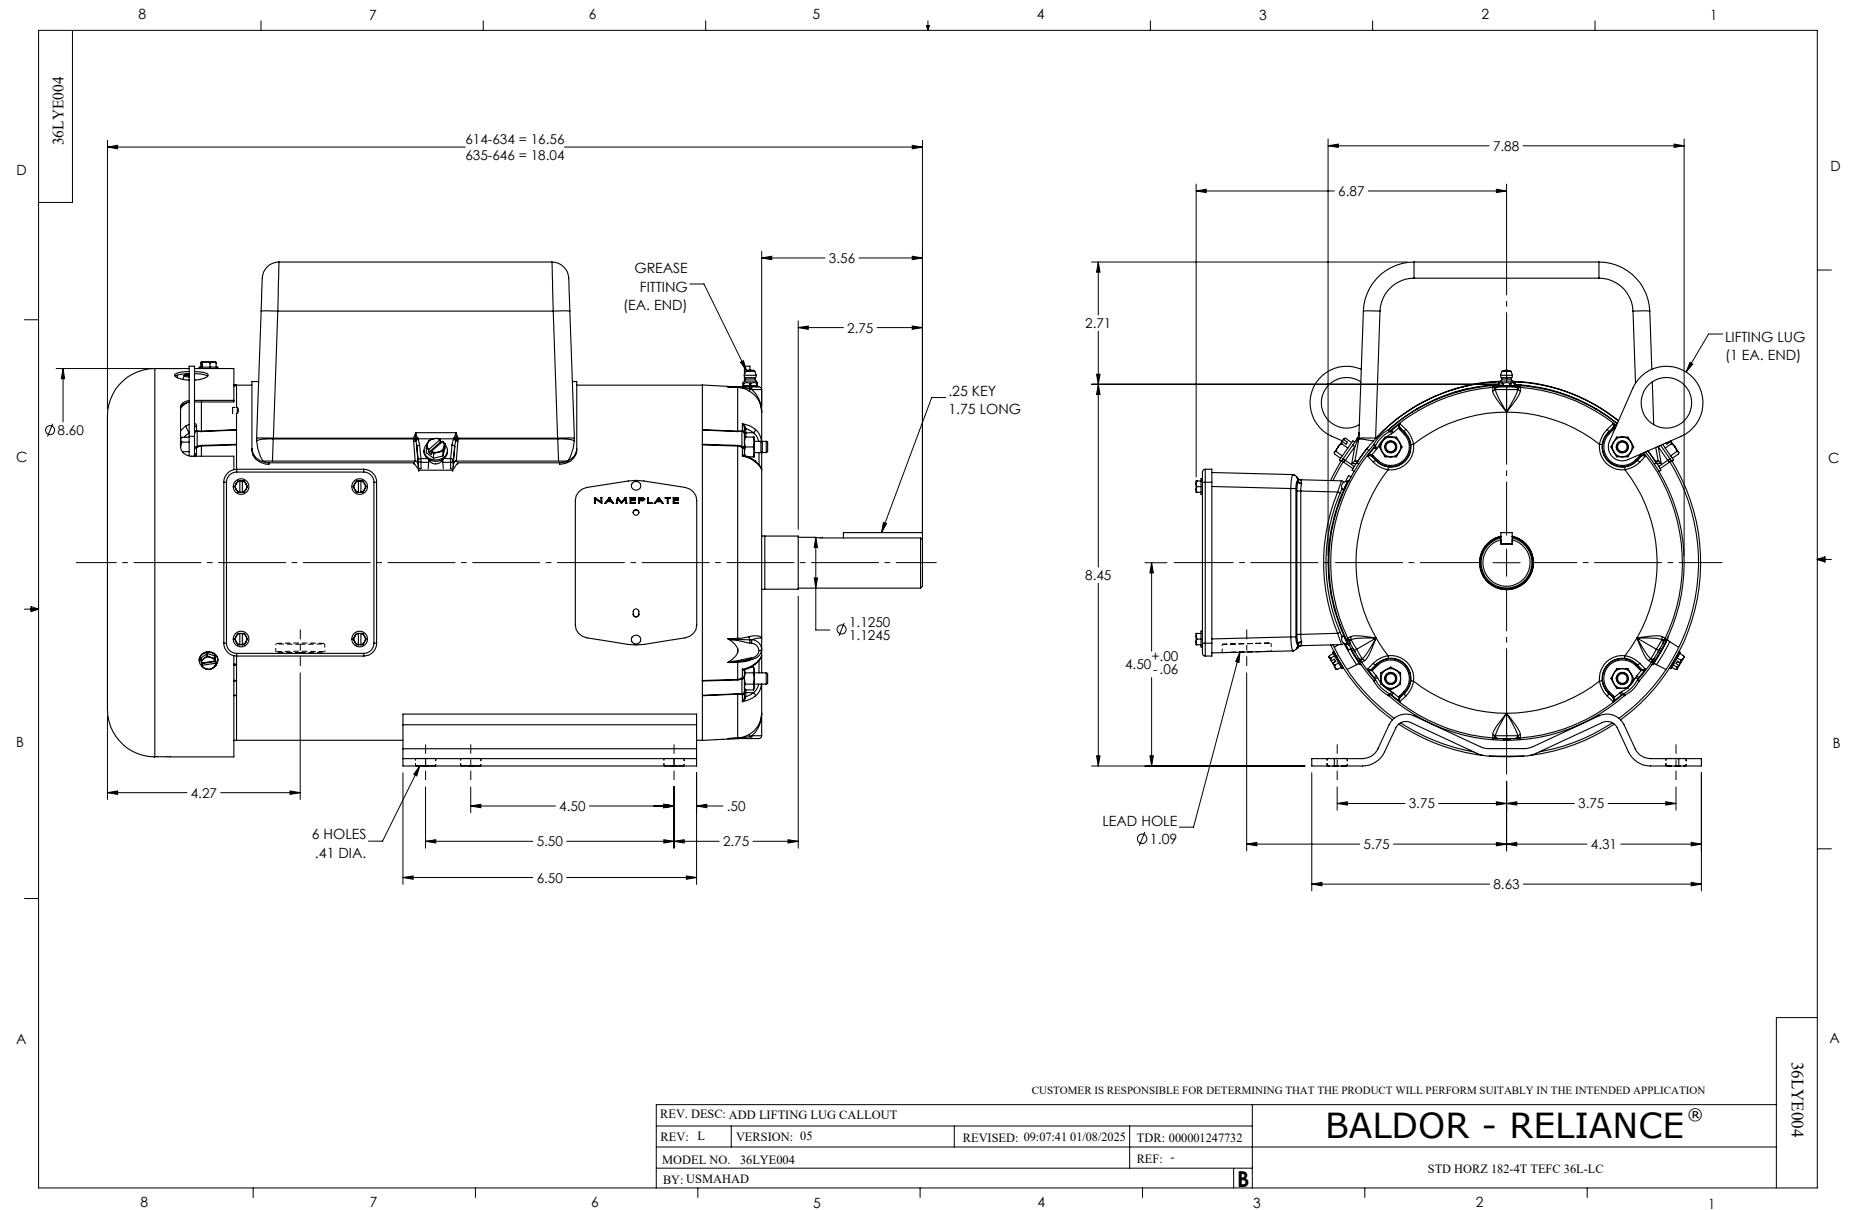

CD0017A02

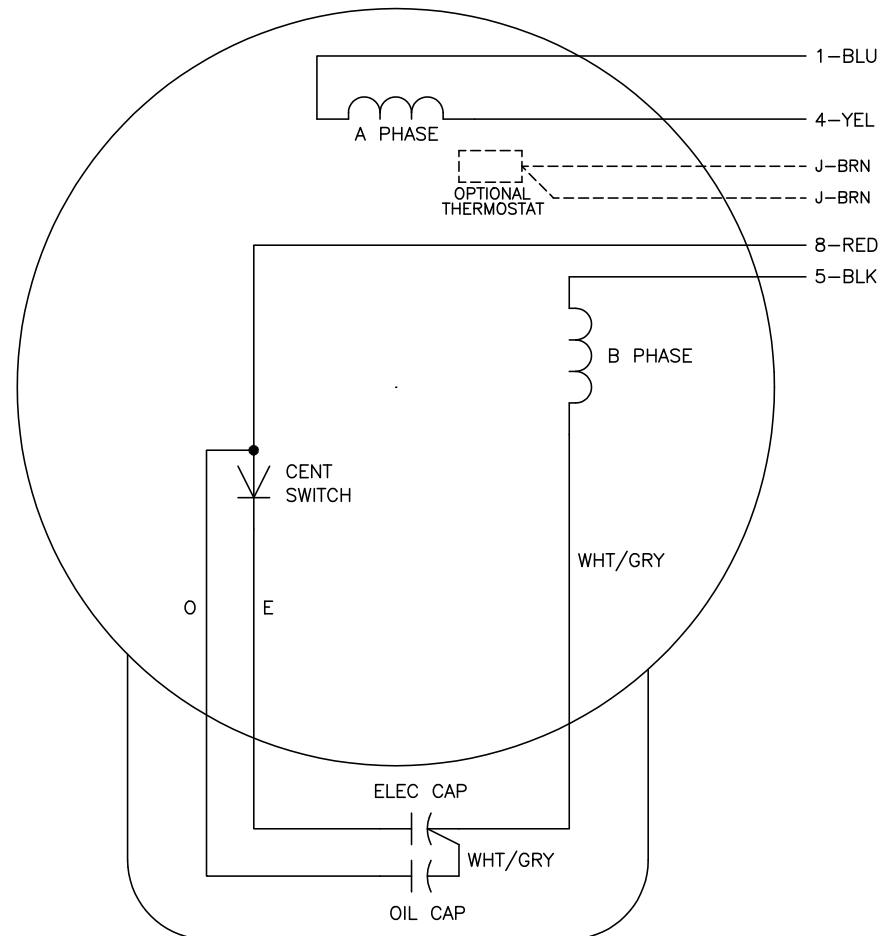

	LINE A	LINE E
STD	1,8	4,5
OPP	1,5	4,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: B	BY: JLP	REVISED: 04/09/99 11:30	TDR: 0178636
CD0017A02		FILE: AAA00007514	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

TYPE LC, SV, REV, 4 LEADS

CD00017A02