



Customer information packet

EM2394T-8

15HP, 3525RPM, 3PH, 60HZ, 254T, 0930M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	254T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	15.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	CURUSEEV NEMA PREMIUM NEMA_PREMIUM UR CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	40.000 A @ 200.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	AK
Type	AC
Mech. spec.	09P11
Base	
Status	PRD/A
Elec. spec.	09WGZ580
Layout	09LYP011
Eff. date	04-16-2024
CD Diagram	CD0006
Poles	02
Leads	3#8
Proprietary	False
Created date	04-22-2010

High Voltage Full Load Amps	40.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0930M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	23.36 IN
Power Factor	88
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3525 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441L											
CAT.NO.	EM2394T-8										
SPEC.	09P011Z580										
HP	15										
VOLTS	200										
AMP	40										
RPM	3525										
FRAME	254T		HZ	60			PH	3			
SER.F.	1.15	CODE	G	DES	B	CL	F				
NEMA-NOM-EFF	91	PF	88								
RATING	40C AMB-CONT										
CC	010A										
DE	6309		ODE	6208							
ENCL	TEFC	SN									
VPWM INVERTER READY											
CT6-60H(10:1)VT3-60H(20:1											

Accessories

Part number	Description	Multiplier
09-1309	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 30931

Typical performance - not guaranteed values

Winding: 09WGZ580-R001			Type: 0930M		Enclosure: TEFC		
Nameplate Data				200 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		15		Full Load Torque		22.2 LB-FT	
Volts		200		Start Configuration		direct on line	
Full Load Amps		40		Breakdown Torque		90.9 LB-FT	
R.P.M.		3525		Pull-up Torque		29.3 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		36.4 LB-FT	
NEMA Design Code		B	KVA Code	G	Starting Current		262 A
Service Factor (S.F.)		1.15		No-load Current		12.9 A	
NEMA Nom. Eff.		91	Power Factor	88	Line-line Res. @ 25°C		0.131 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		60°C	
S.F. Amps				Temp. Rise @ S.F. Load		75°C	
				Locked-rotor Power Factor		30	
				Rotor inertia		0.766 LB-FT2	

Load Characteristics 200 V, 60 Hz, 15 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	59	79	86	89	89	89	89
Efficiency	86.4	90.6	91.4	91.2	90.7	89.8	90.9
Speed	3581	3563	3543	3524	3501	3476	3510
Line amperes	16.1	22.7	30.8	39.7	49.3	59.8	45.5


ABB Motors and Mechanical Inc.


WINDING # 09WGZ580

Typical performance - not guaranteed values.




15 HP 3 PH 60 HZ 3525 RPM 200 V 0930M

TORQUES (LB-FT): PO=90.9 PU=29.3 LR=36.4 LRA=262

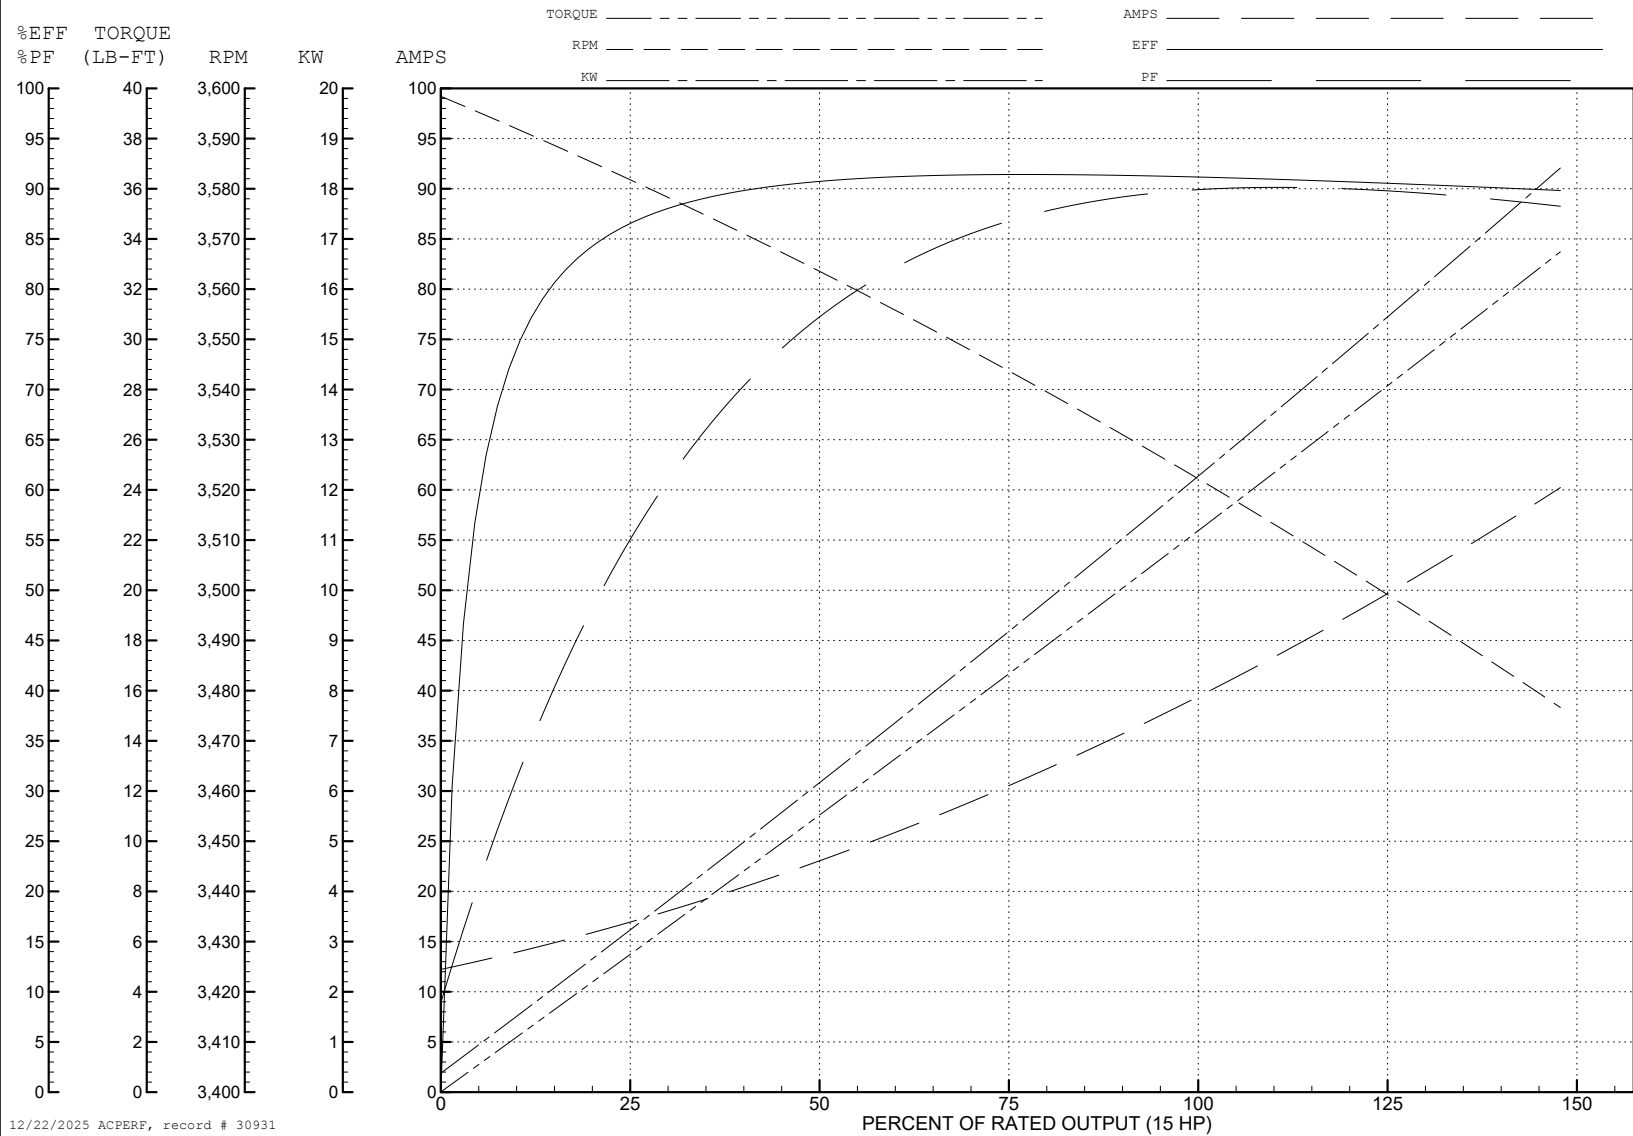

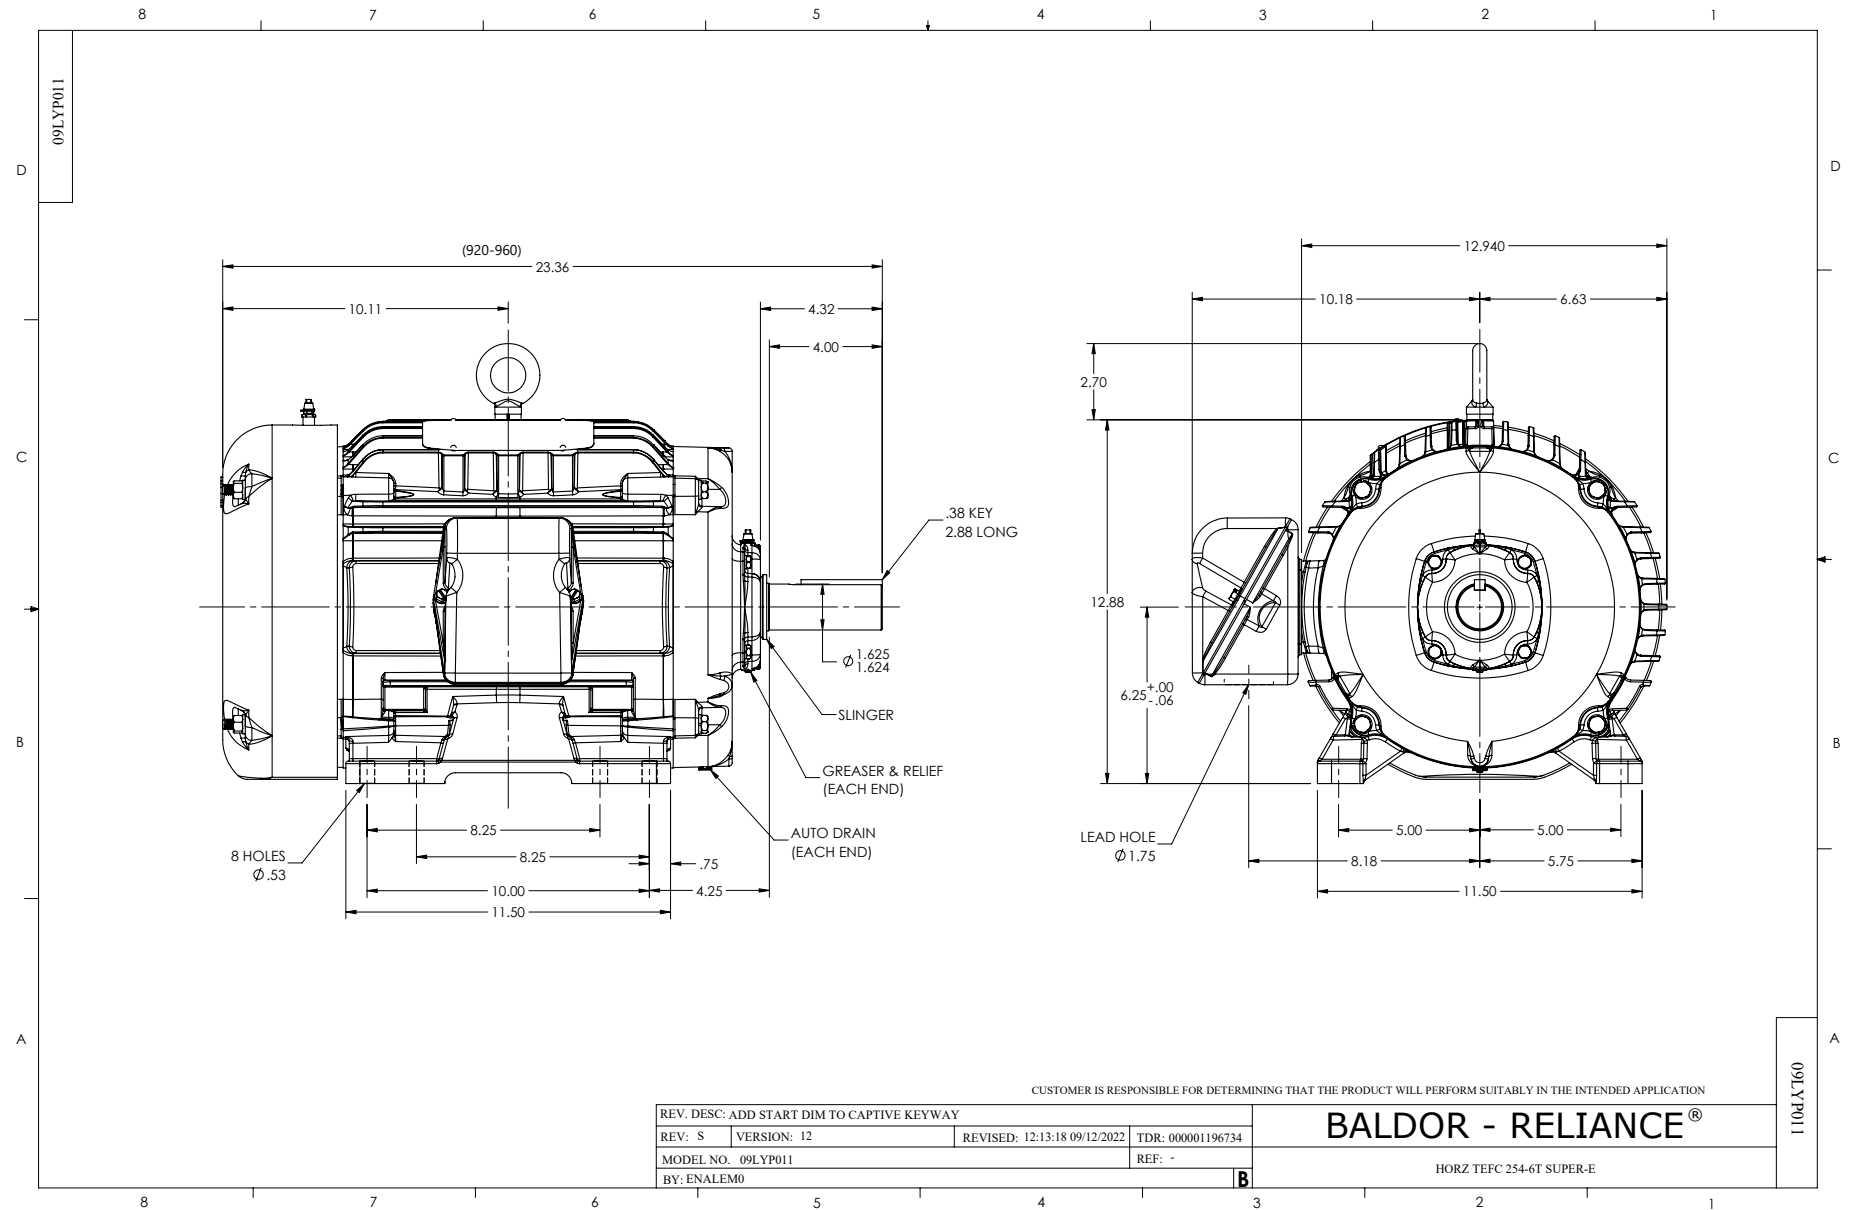

CD0006

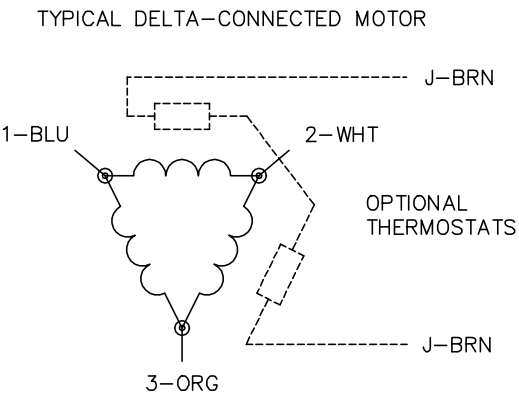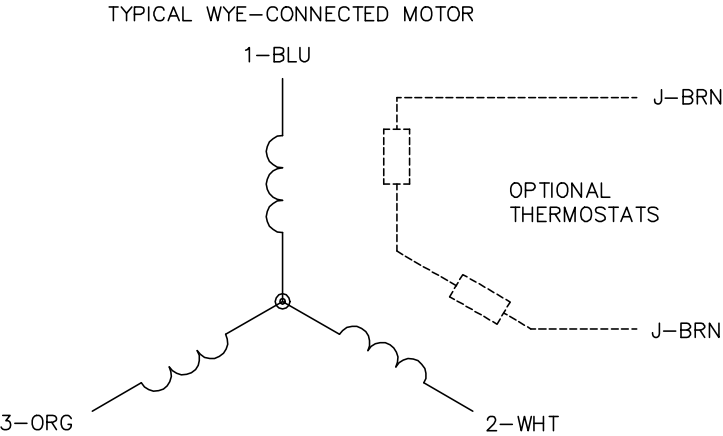

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1