



Customer information packet

EM2506T

7.5HP, 1185RPM, 3PH, 60HZ, 254T, 3950M, OPSB, F

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	254T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	24.000 A @ 208.0 V 22.800 A @ 230.0 V 11.400 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part detail

Revision	H
Type	AC
Mech. spec.	39K57
Base	
Status	PRD/A
Elec. spec.	39WGY440
Layout	39LYK057
Eff. date	12-12-2025
CD Diagram	CD0180
Poles	06
Leads	9#12
Proprietary	False
Created date	11-18-2020

Heater Indicator	No Heater
High Voltage Full Load Amps	11.4 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 12 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3950M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	23.19 IN
Power Factor	68
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1185 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3554LUA											
CAT.NO.	EM2506T			P/N						ENCL	OPSE
SPEC.	39K057Y440		CC	010A		FRAME		254T		SER.NO.	
HP	7.5			CLASS		F		HZ	60		
RPM	1185			PH	3		DES		A		
VOLTS	230/460				CODE		K		ODE BRG	6208	DE BRG 6309
AMPS	22.8/11.4										
RATING	40C AMB-CONT			NEMA-NOM-EFF				90.2		GREASE	POLYREX EM
PF	68	SER.F.	1.15		CT30-60(2:1) VT3-60(20:1)						
USABLE AT	50HZ 7.5HP 190/380V 27.0/13.5A				SF 1.0						
HTR-VOLTS	HTR-AMPS		MAX. SPACE HEATER TEMP.								

Accessories

Part number	Description	Multiplier
39-3400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 85549

Preliminary Data Sheet

Winding: 39WGY440-RXXX			Type: 3950M		Enclosure: OPSB		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		7.5	Full Load Torque		33.3 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		22.8/11.4	Breakdown Torque		110 LB-FT		
R.P.M.		1185	Pull-up Torque		43.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		59.6 LB-FT	
NEMA Design Code		A	KVA Code	K	Starting Current		76.8 A
Service Factor (S.F.)		1.15		No-load Current		6.49 A	
NEMA Nom. Eff.		90.2	Power Factor	70	Line-line Res. @ 25°C		1.04 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		27°C	
S.F. Amps		25.2/12.6		Temp. Rise @ S.F. Load		33°C	
				Locked-rotor Power Factor		33.3	
				Rotor inertia		4.02 lb-ft²	

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	31	49	61	68	72	74	71
Efficiency	82.6	88.9	90.7	90.9	90.6	89.9	90.7
Speed	1196	1193	1189	1185	1180	1175	1182
Line amperes	6.99	8.04	9.57	11.4	13.5	15.9	12.6


ABB Motors and Mechanical Inc.


WINDING # 39WGY440

Typical performance - not guaranteed values.

7.5 HP 3 PH 60 HZ 1185 RPM 460 V 3950M

TORQUES (LB-FT): PO=110 PU=43.5 LR=59.6 LRA=76.8

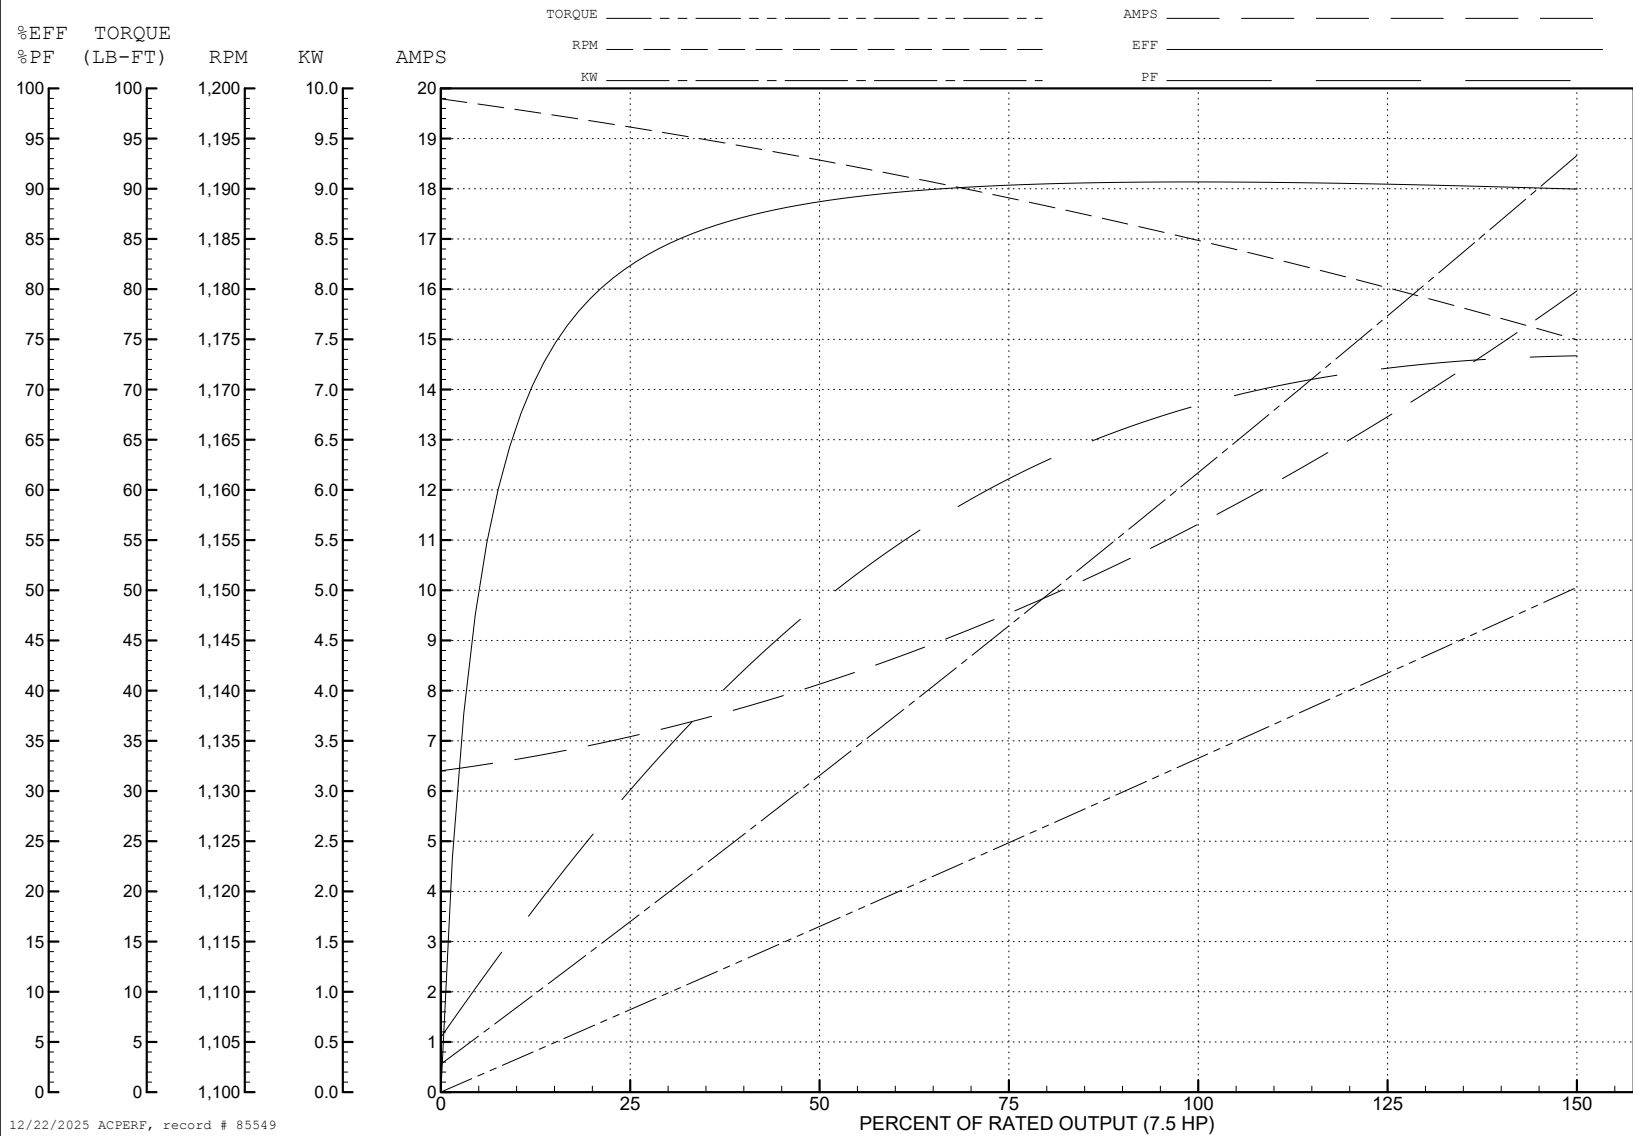


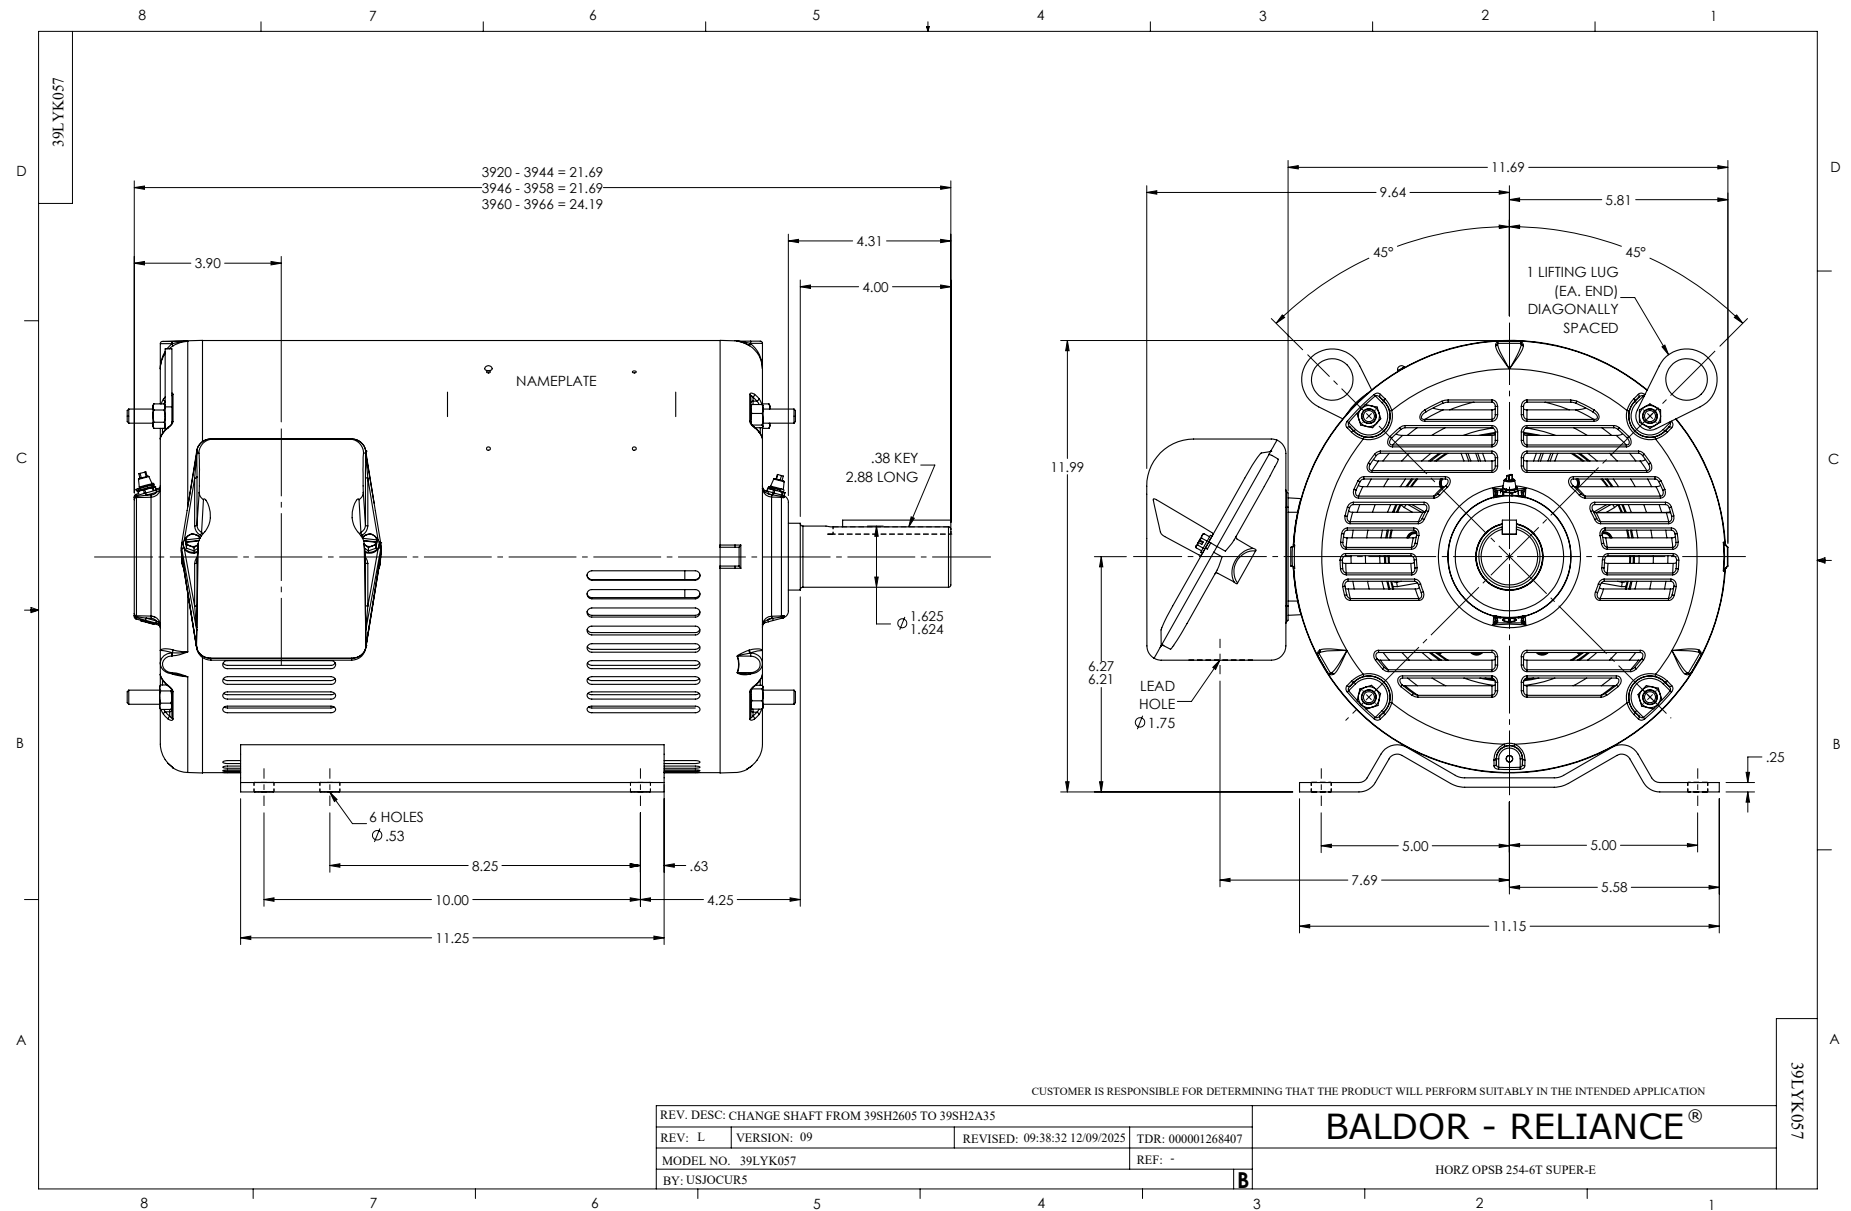

CD0180

LOW VOLTAGE
(2D)

LINE

HIGH VOLTAGE
(1D)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0180

REV. DESC: ADD CLASS CONN00000007

REV. LTR: D

VERSION: 01

TDR: 000001099922

FILE: \AAA\00005\148

REVISED: 10: 25: 29 02/19/2019

BY: ENBRIRO

MTL: —

**BALDOR - RELIANCE®**

3PH, DV, 9 LEADS, DELTA CONNECTION

SH 1 of 1