

BALDOR • RELIANCE

Customer information packet

EM2547T-12

60HP, 1775RPM, 3PH, 60HZ, 364T, 4278M, OPSB, F1

Specifications

Enclosure	OPSB
Frame	364T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	68.000 A @ 460.0 V 144.000 A @ 208.0 V 136.000 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	Y
Type	AC
Mech. spec.	42E211
Base	
Status	PRD/A
Elec. spec.	42WGW658
Layout	42LYE211
Eff. date	11-29-2023
CD Diagram	CD0104
Poles	04
Leads	12#8
Proprietary	False
Created date	07-29-2009

High Voltage Full Load Amps	68.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 8 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4278M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	30.69 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP2138LUA

CAT.NO.	EM2547T-12	P/N		ENCLOSURE	OPSB
SPEC.	42E211W658	CC	010A	FRAME	364T
HP	60	CLASS	F	HZ	60
RPM	1775	PH	3	DES	A
VOLT	230/460	KVA-CODE	G	ODE BRG	6311
AMP	136/68	DE BRG			6313
RATING	40C AMB-CONT	GREASE	POLYREX EM		
NEMA-NOM-EFF	95	PF	87	SER.F.	1.15
HTR-VOLTS	50Hz 60Hp 190/380V 162/81A			SF	1.0
HTR-AMPS					

AC Induction Motor Performance Data

Record # 25763

Typical performance - not guaranteed values

Winding: 42WGW658-R001		Type: 4278M	Enclosure: OPSB	
Nameplate Data			460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	60	Full Load Torque	177 LB-FT	
Volts	230/460	Start Configuration	direct on line	
Full Load Amps	136/68	Breakdown Torque	624 LB-FT	
R.P.M.	1775	Pull-up Torque	245 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque	314 LB-FT
NEMA Design Code	A KVA Code	G	Starting Current	470 A
Service Factor (S.F.)	1.15	No-load Current	22.2 A	
NEMA Nom. Eff.	95 Power Factor	87	Line-line Res. @ 25°C	0.0815 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	30°C	
S.F. Amps		Temp. Rise @ S.F. Load	36°C	
		Locked-rotor Power Factor	26	
		Rotor inertia	10.4 LB-FT ²	

Load Characteristics 460 V, 60 Hz, 60 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	85	87	88	88	88
Efficiency	92.7	94.9	95.5	95	94.5	93.9	94.7
Speed	1793	1787	1781	1775	1769	1762	1771
Line amperes	27.3	38.7	52.1	67.6	83.6	101	77.2


ABB Motors and Mechanical Inc.

WINDING # 42WGW658

Typical performance - not guaranteed values.

60 HP 3 PH 60 HZ 1775 RPM 460 V 4278M

TORQUES (LB-FT): PO=624 PU=245 LR=314 LRA=470

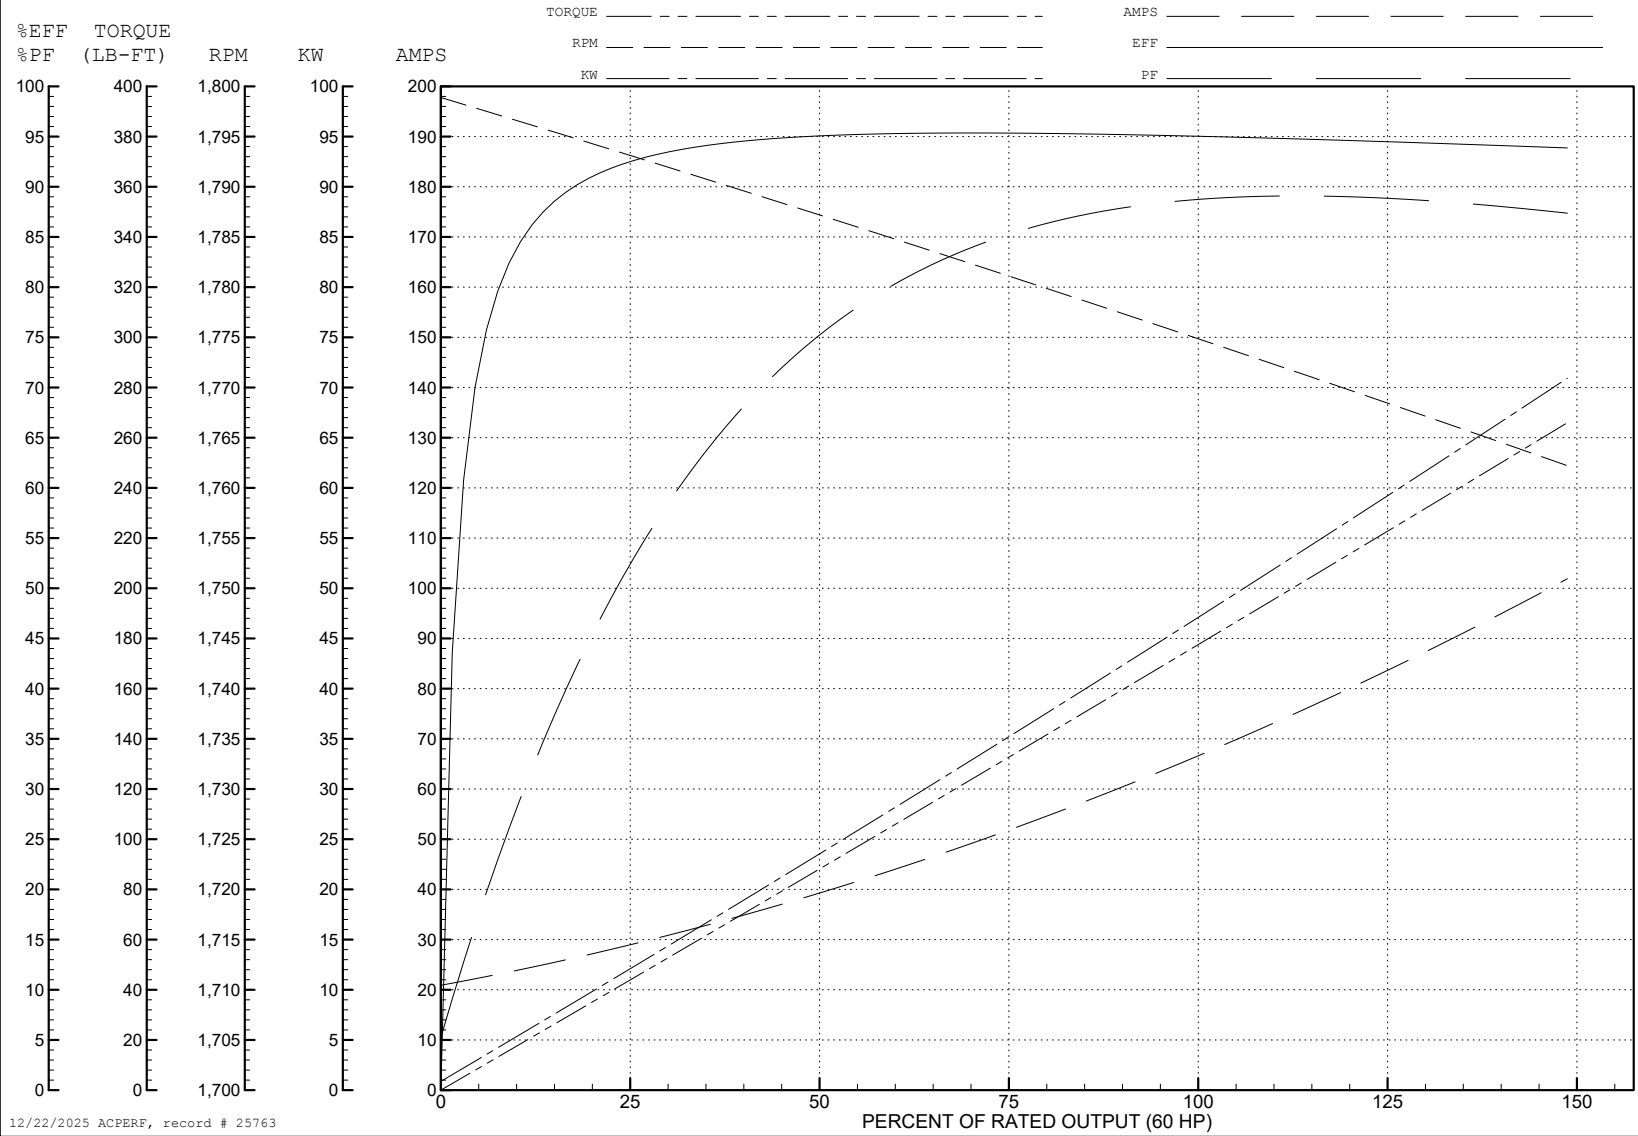

12/22/2025 ACPERF, record # 25763

