



Customer information packet

EM2547T-8

60HP, 1775RPM, 3PH, 60HZ, 364T, 4278M, OPSB, F1

Specifications

Enclosure	OPSB
Frame	364T
Frame Material	Steel
Frequency	60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	153.000 A @ 208.0 V 160.000 A @ 200.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	160.0 a
Insulation Class	F

Part detail

Revision	V
Type	AC
Mech. spec.	42E211
Base	
Status	PRD/A
Elec. spec.	42WGW588
Layout	42LYE211
Eff. date	02-12-2024
CD Diagram	CD0695
Poles	04
Leads	6#4
Proprietary	False
Created date	07-27-2009

Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 4 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4278M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	30.69 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	2.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1775 rpm
Speed Code	Single Speed
Starting Method	Part Winding
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP2138L

CAT.NO.	EM2547T-8	P/N		ENCLOSURE	OPSB				
SPEC.	42E211W588	CC	010A	FRAME	364T	S/N			
HP	60	CLASS	F	HZ	60				
RPM	1775	PH	3	DES	A				
VOLT	200			KVA-CODE	G	ODE BRG	6311	DE BRG	6313
AMP	160								
RATING	40C AMB-CONT	GREASE	POLYREX EM						
NEMA-NOM-EFF	95	PF	87	SER.F.	1.15				
HTR-VOLTS		HTR-AMPS							

Accessories

Part number	Description	Multiplier
42-1400	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 13773

Typical performance - not guaranteed values

Winding: 42WGW588-R001			Type: 4278M		Enclosure: OPSB		
Nameplate Data				200 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		60		Full Load Torque		177 LB-FT	
Volts		200		Start Configuration		direct on line	
Full Load Amps		160		Breakdown Torque		624 LB-FT	
R.P.M.		1775		Pull-up Torque		245 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		314 LB-FT	
NEMA Design Code		A	KVA Code	G	Starting Current		1080 A
Service Factor (S.F.)		1.15		No-load Current		51.1 A	
NEMA Nom. Eff.		95	Power Factor	87	Line-line Res. @ 25°C		0.0158 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		30°C	
S.F. Amps				Temp. Rise @ S.F. Load		40°C	
				Locked-rotor Power Factor		26.2	
				Rotor inertia		10.4 LB-FT2	

Load Characteristics 200 V, 60 Hz, 60 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	56	77	85	87	89	89	88
Efficiency	92.6	94.9	95.3	95	94.6	93.7	94.8
Speed	1793	1787	1781	1775	1769	1762	1771
Line amperes	62.8	89	120	155	192	233	177.2


ABB Motors and Mechanical Inc.


WINDING # 42GW588

Typical performance - not guaranteed values.



60 HP 3 PH 60 HZ 1775 RPM 200 V 4278M

TORQUES (LB-FT): PO=624 PU=245 LR=314 LRA=1080

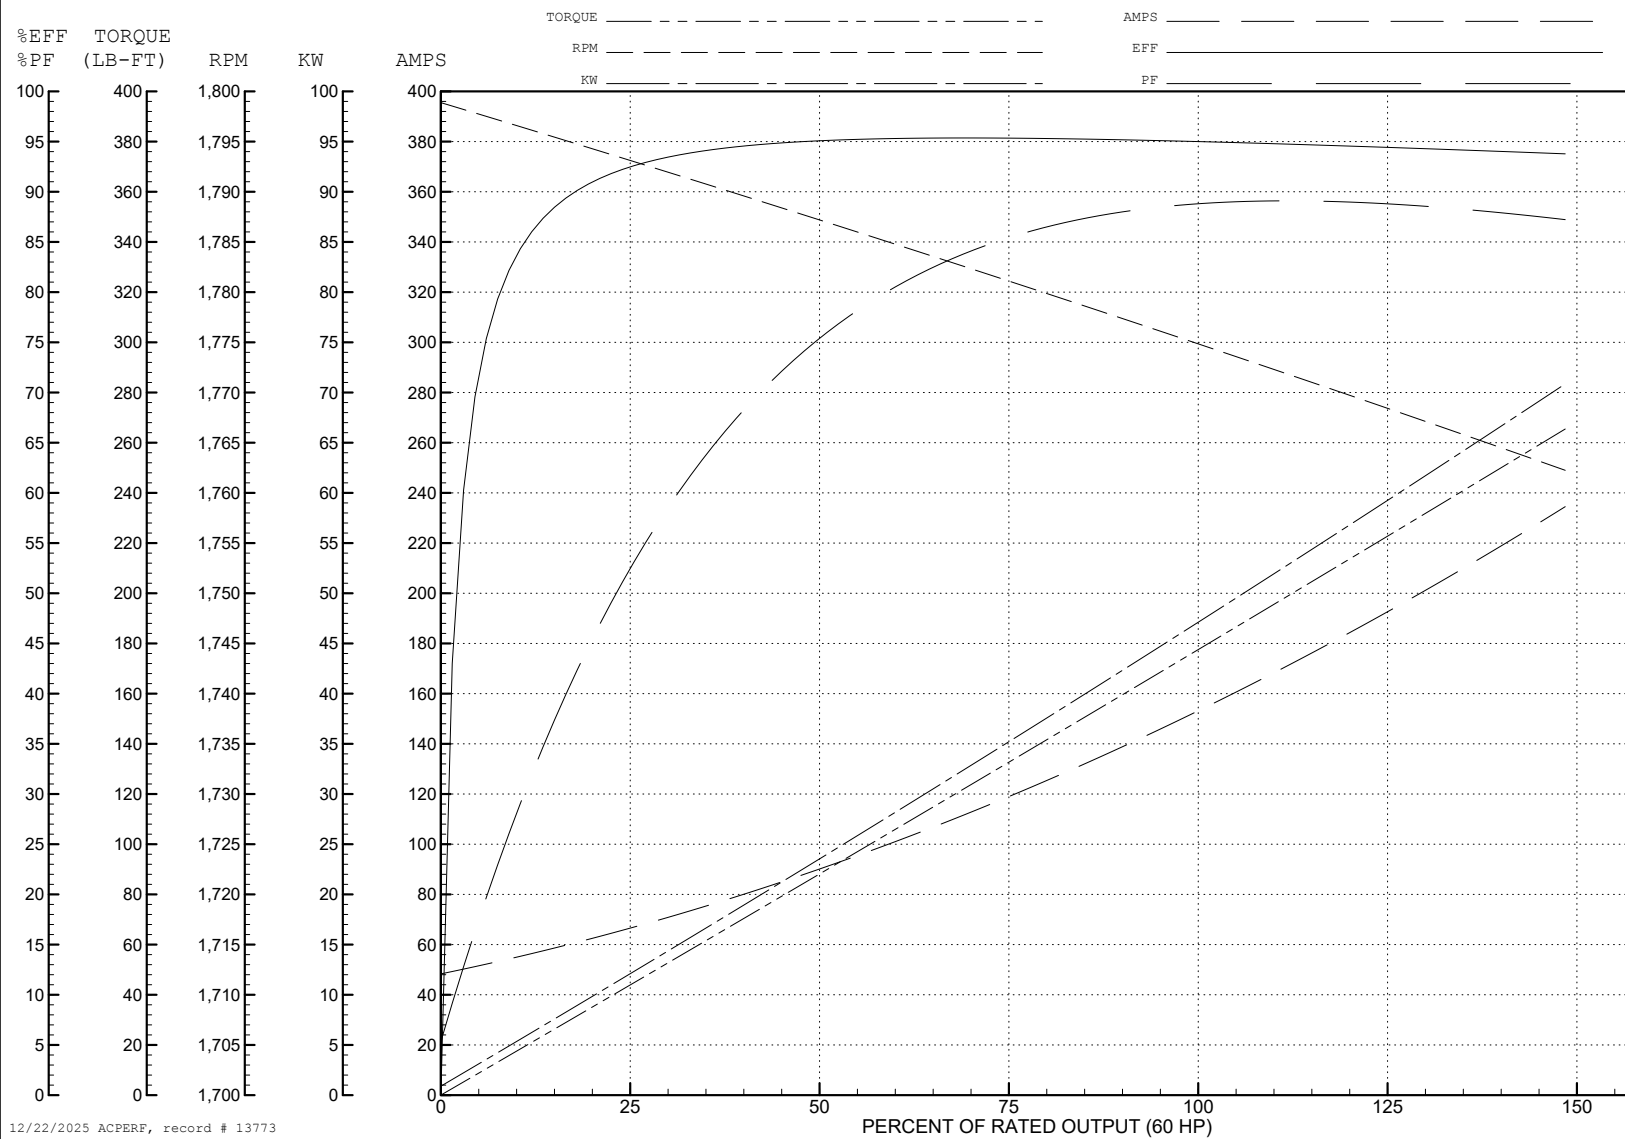


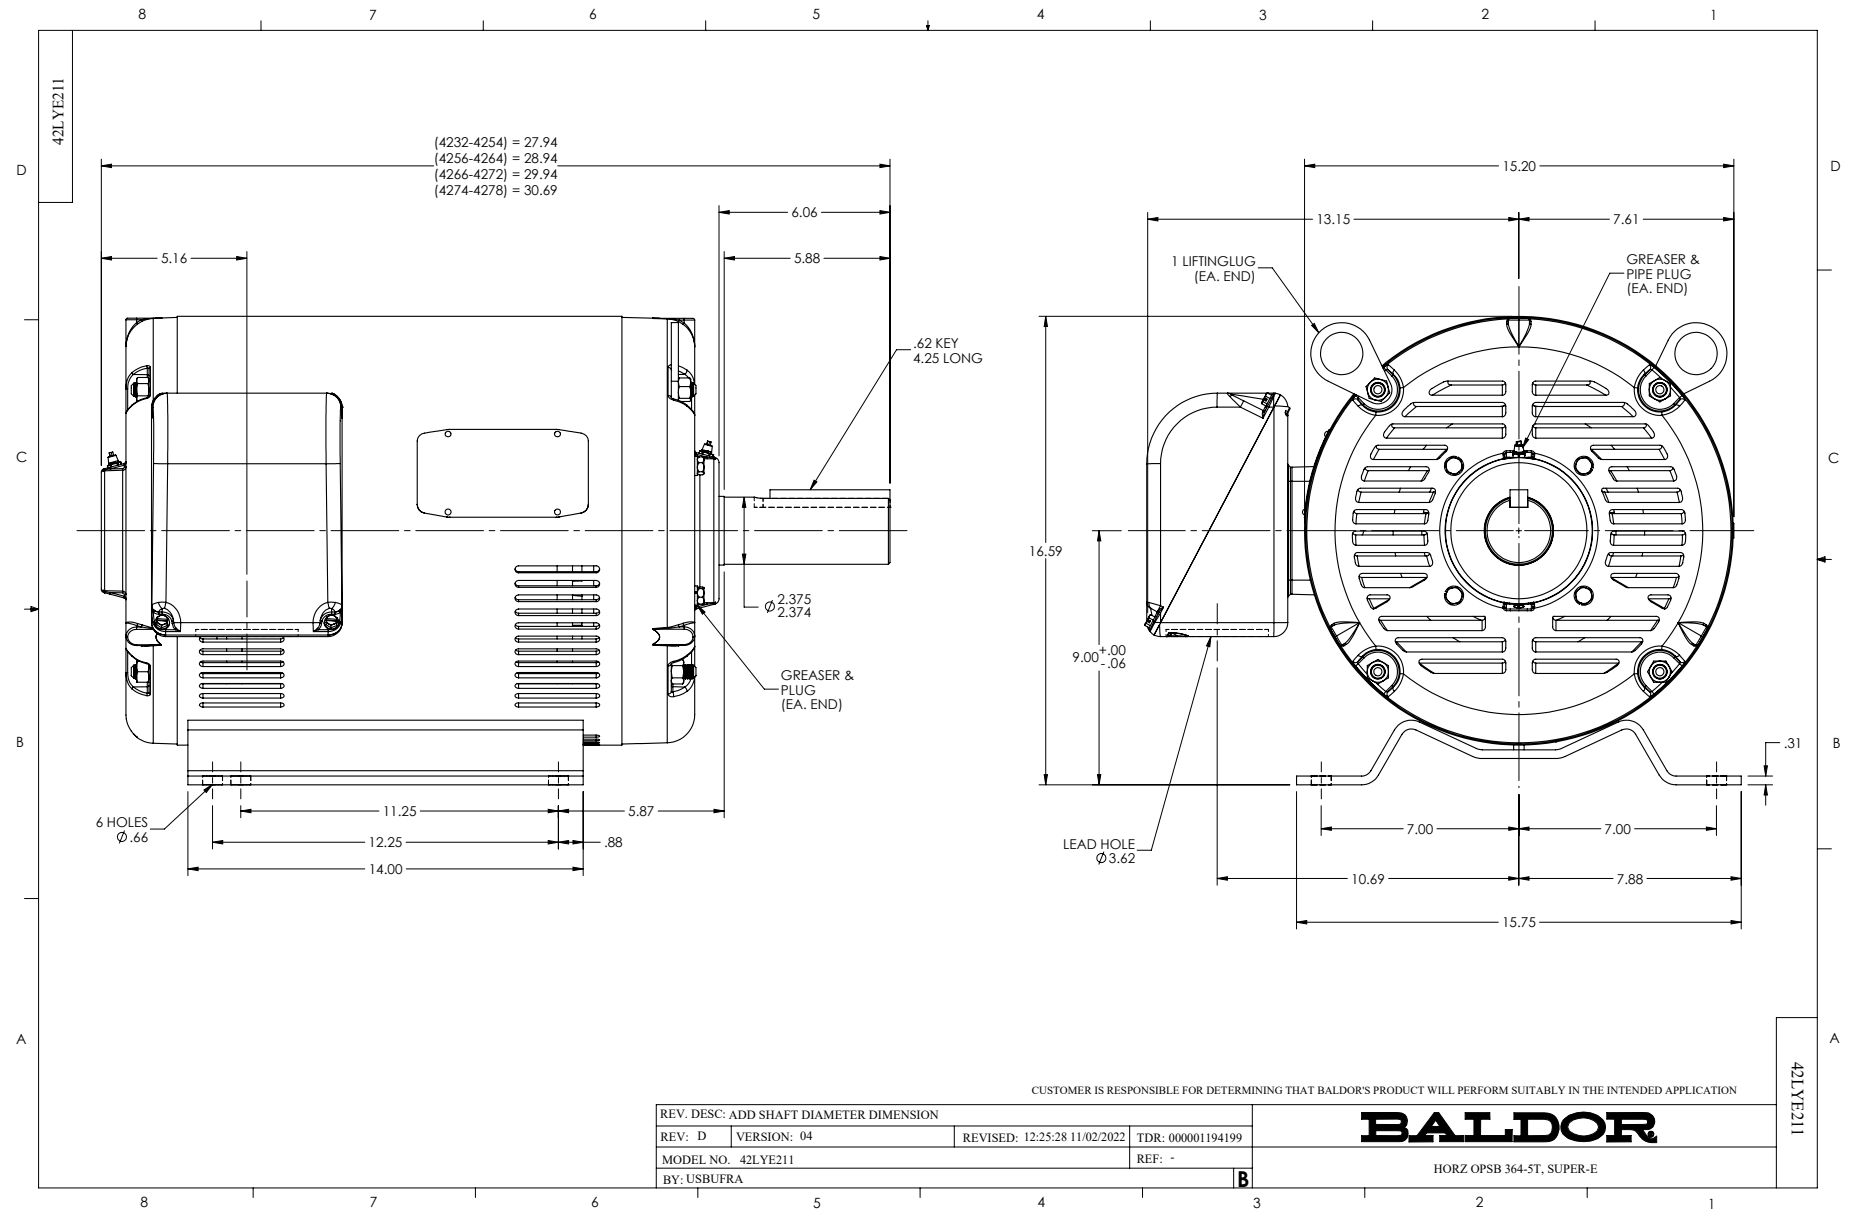


CD0695

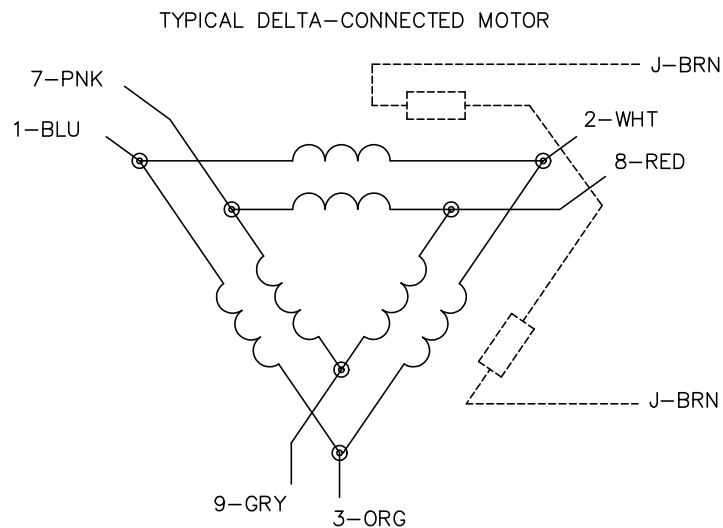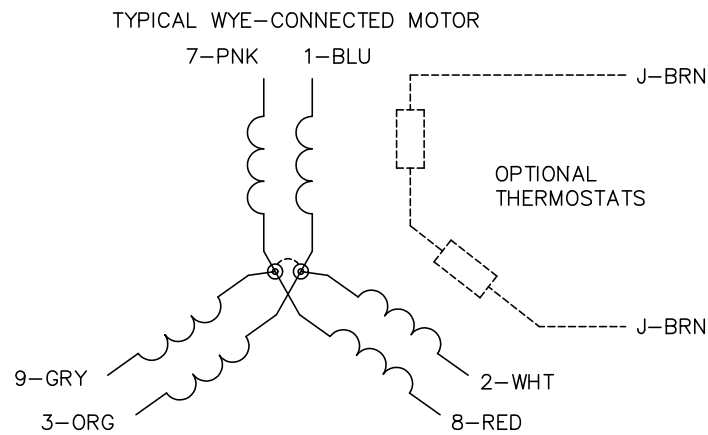

START CONNECTION



RUN CONNECTION



NOTES:

1. MOTOR MAY BE WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0695

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: C

BY: JLP

REVISED: 01/21/99 3:19

TDR: 0171435

S69000

FILE: AAA00005151

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, PART WINDING START