



Customer information packet

EM3663T-8

28M 2P TEFC HOR 184T SUPER E

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	200.0 V @ 60 HZ
Agency Approvals	CSA EEV NEMA PREMIUM NEMA_PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.300 A @ 200.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	13.3 a
Insulation Class	F

Part detail

Revision	E
Type	AC
Mech. spec.	06C101
Base	
Status	PRD/A
Elec. spec.	06WGX788
Layout	06LYC101
Eff. date	08-05-2024
CD Diagram	CD0006
Poles	02
Leads	3#14
Proprietary	False
Created date	12-14-2018

Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	3 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0628M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.24 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	3480 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441L									
CAT.NO.	EM3663T-8								
SPEC.	06C101X788G1								
HP	5								
VOLTS	200								
AMP	13.3								
RPM	3480								
FRAME	184T		HZ	60		PH	3		
SER.F.	1.15	CODE	L	DES	A	CL	F		
NEMA-NOM-EFF	88.5	PF	90						
RATING	40C AMB-CONT								
CC	010A								
DE	6206		ODE	6205					
ENCL	TEFC	SN							
VPWM INVERTER READY									
CT6-60H(10:1)VT3-60H(20:1									

Accessories

Part number	Description	Multiplier
36-1749	C FACE KIT	A8

AC Induction Motor Performance Data

Record # 50654

Typical performance - not guaranteed values

Winding: 06WGX788-R001			Type: 0628M		Enclosure: TEFC			
Nameplate Data			200 V, 60 Hz: Single Voltage Motor					
Rated Output (HP)		5	Full Load Torque		7.55 LB-FT			
Volts		200	Start Configuration		direct on line			
Full Load Amps		13.3	Breakdown Torque		34.7 LB-FT			
R.P.M.		3480	Pull-up Torque		22.3 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		26.8 LB-FT		
NEMA Design Code		A	KVA Code	L	Starting Current		134 A	
Service Factor (S.F.)		1.15	No-load Current		4.46 A			
NEMA Nom. Eff.		88.5	Power Factor		90	Line-line Res. @ 25°C		0.544 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		57°C		
S.F. Amps				Temp. Rise @ S.F. Load		70°C		
				Locked-rotor Power Factor		50.8		
				Rotor inertia		0.125 LB-FT2		

Load Characteristics 200 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	58	79	87	92	93	94	93
Efficiency	85.9	90	90.1	89.2	87.8	85.8	88.4
Speed	3573	3546	3515	3483	3448	3409	3462
Line amperes	5.42	7.53	10.3	13.2	16.4	20	15.1


ABB Motors and Mechanical Inc.


WINDING # 06WGX788

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 3480 RPM 200 V 0628M

TORQUES (LB-FT): PO=34.7 PU=22.3 LR=26.8 LRA=134

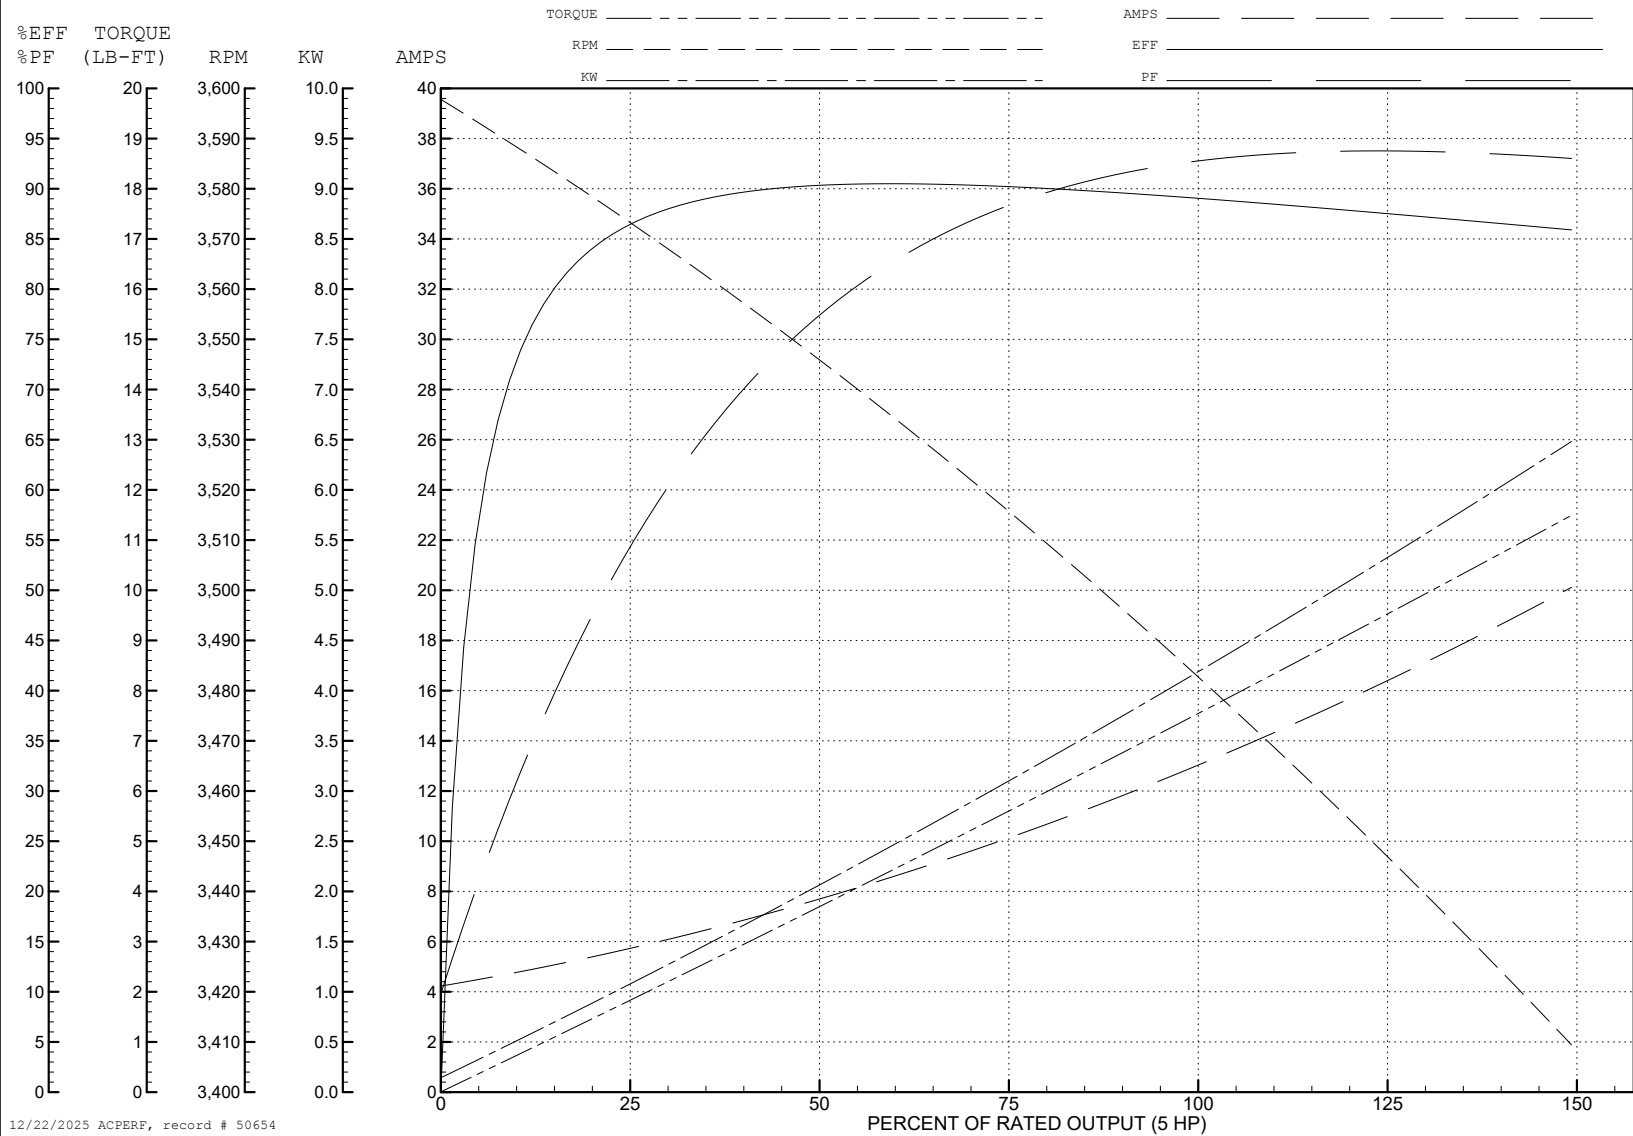

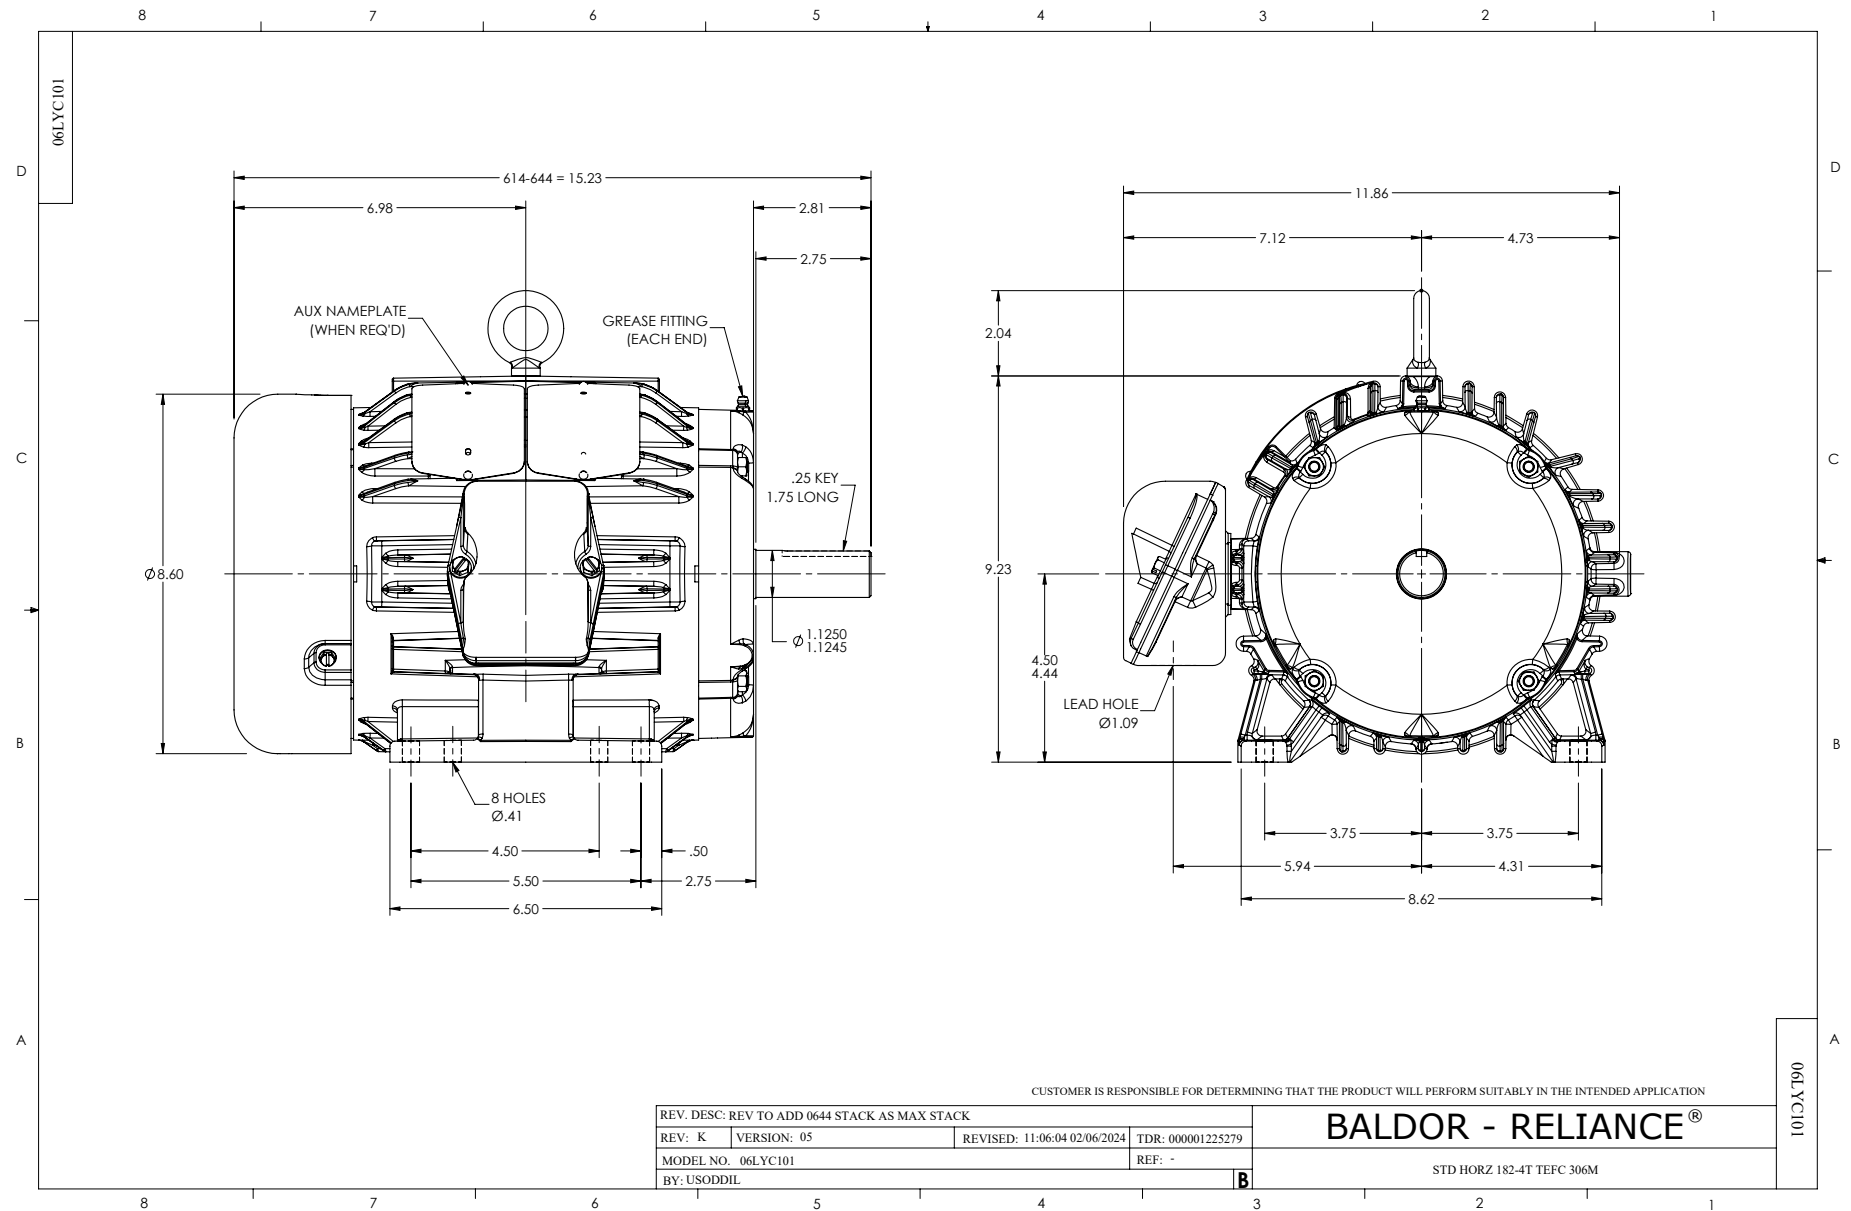

CD0006

TYPICAL WYE-CONNECTED MOTOR

1-BLU

J-BRN

OPTIONAL THERMOSTATS

J-BRN

3-ORG

2-WHT

TYPICAL DELTA-CONNECTED MOTOR

1-BLU

J-BRN

2-WHT

OPTIONAL THERMOSTATS

J-BRN

3-ORG

1

2

3

LINE

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.

2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.

3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.

4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007			BALDOR - RELIANCE® 3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED SH 1 of 1
REV. LTR: E	VERSION: 01	TDR: 000001099922	
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO	
MTL: —			

06WGX782: Electrical Design

Page 9 of 9