



Customer information packet

EM3764T-BG

3HP, 1165RPM, 3PH, 60HZ, 213T, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.000 A @ 230.0 V 9.000 A @ 208.0 V 4.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater

Part detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	07WGX970
Layout	07LYN555
Eff. date	04-29-2024
CD Diagram	CD0005
Poles	06
Leads	9#14
Proprietary	False
Created date	04-12-2019

High Voltage Full Load Amps	4.5 a
Insulation Class	H
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0736M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	18.45 IN
Power Factor	71
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1165 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA									
CAT.NO.	EM3764T-BG								
SPEC	07-0000-0095								
HP	3								
VOLTS	230/460								
AMPS	9/4.5								
RPM	1165								
FRAME	213T		HZ	60		PH	3		
SF	1.15	CODE	K	DES	B	CLASS	H		
NEMA NOM. EFF	89.5	PF	71						
RATING	40C AMB-CONT								
CC	010A								
ENCL	TEFC	SER							
DE	6307		ODE	6307					
VPWM INVERTER READY									
CT6-60H(10:1)VT3-60H(20:1									
	50HZ 3HP 190/380V 10.4/5.2A						SF1.0		

AC Induction Motor Performance Data

Record # 56803

Typical performance - not guaranteed values

Winding: 07WGX970-R024				Type: 0736M		Enclosure: TEFC	
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		3		Full Load Torque		13.61 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		9/4.5		Breakdown Torque		51.71 LB-FT	
R.P.M.		1165		Pull-up Torque		25.77 LB-FT	
Hz		60		Phase		3	
NEMA Design Code		B		KVA Code		K	
Service Factor (S.F.)		1.15		Starting Current		32.19 A	
NEMA Nom. Eff.		89.5		Power Factor		71	
Rating - Duty		40C		AMB-CONT			
S.F. Amps				Temp. Rise @ Rated Load		34°C	
				Temp. Rise @ S.F. Load		41°C	
				Locked-rotor Power Factor		23.3	
				Rotor inertia		0.895 LB-FT2	

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	35	54	65	72	75	76	73
Efficiency	82.8	88.3	89.7	89.6	89	87.3	89.2
Speed	1192	1184	1176	1166	1156	1143	1161
Line amperes	2.48	2.96	3.62	4.41	5.29	6.33	4.99


ABB Motors and Mechanical Inc.


WINDING # 07WGX970

Typical performance - not guaranteed values.


3 HP 3 PH 60 HZ 1165 RPM 460 V 0736M

TORQUES (LB-FT): PO=51.71 PU=25.77 LR=31.08 LRA=32.19

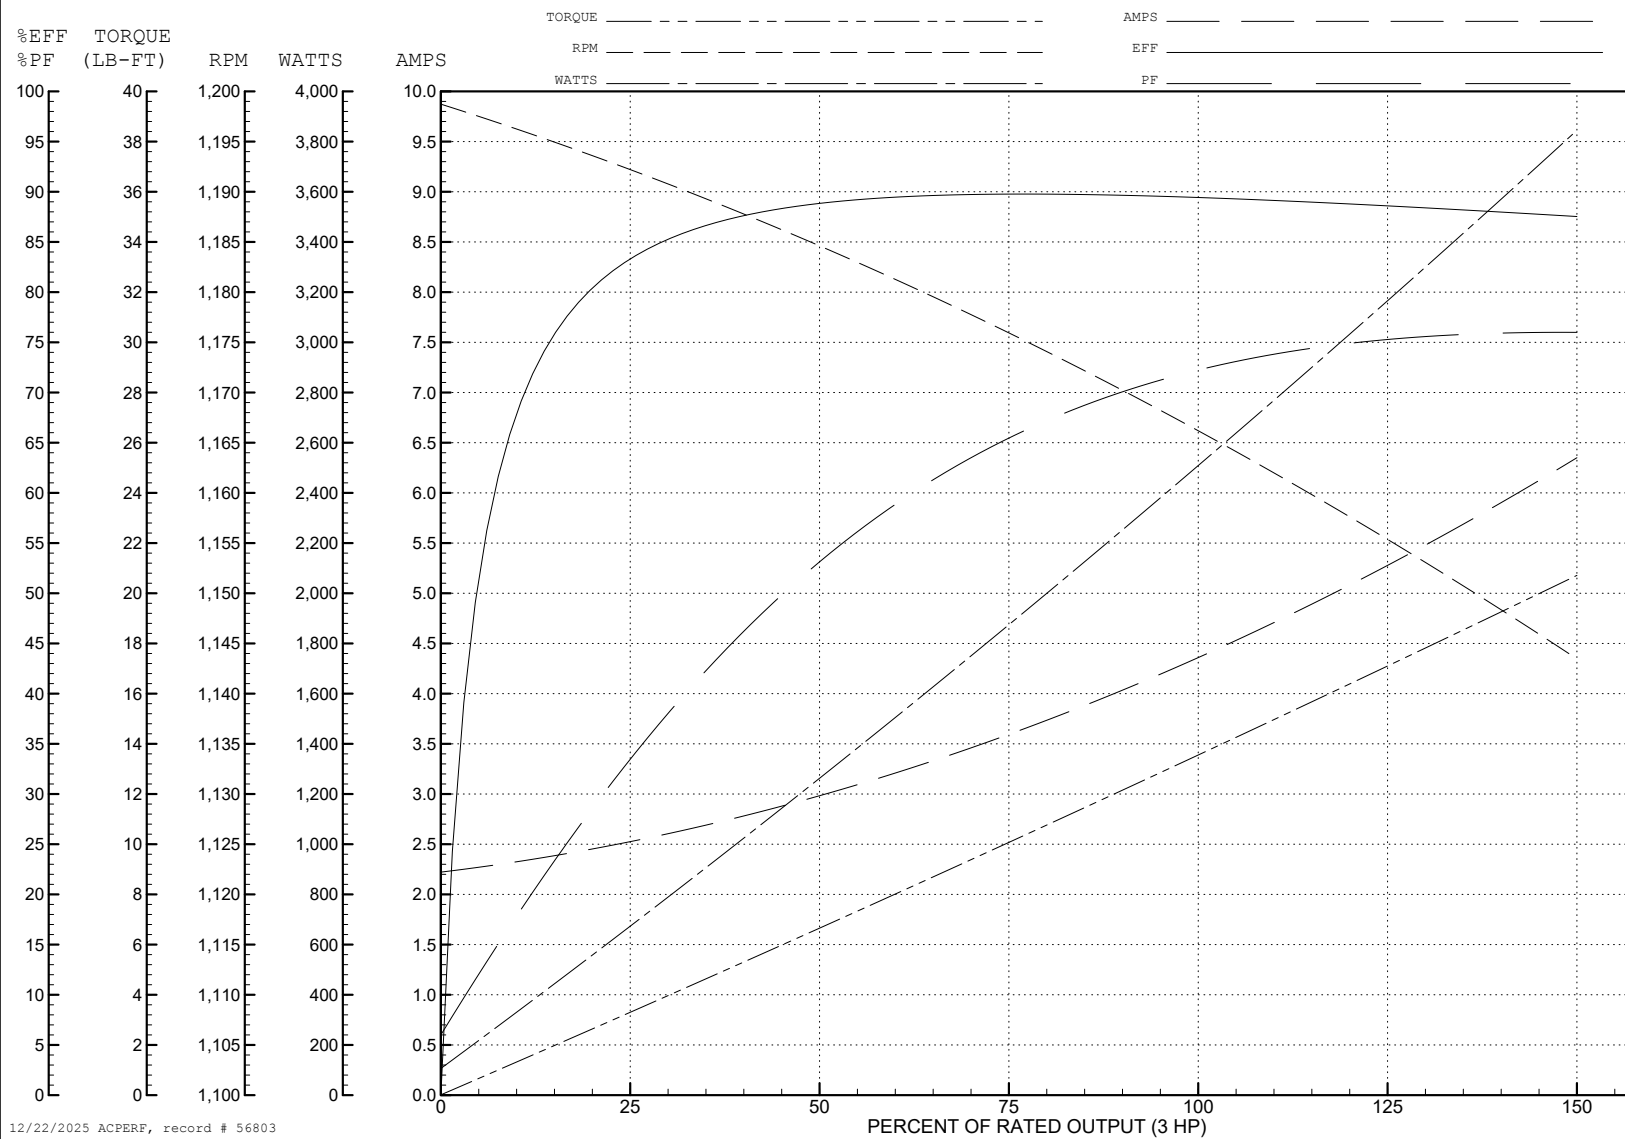


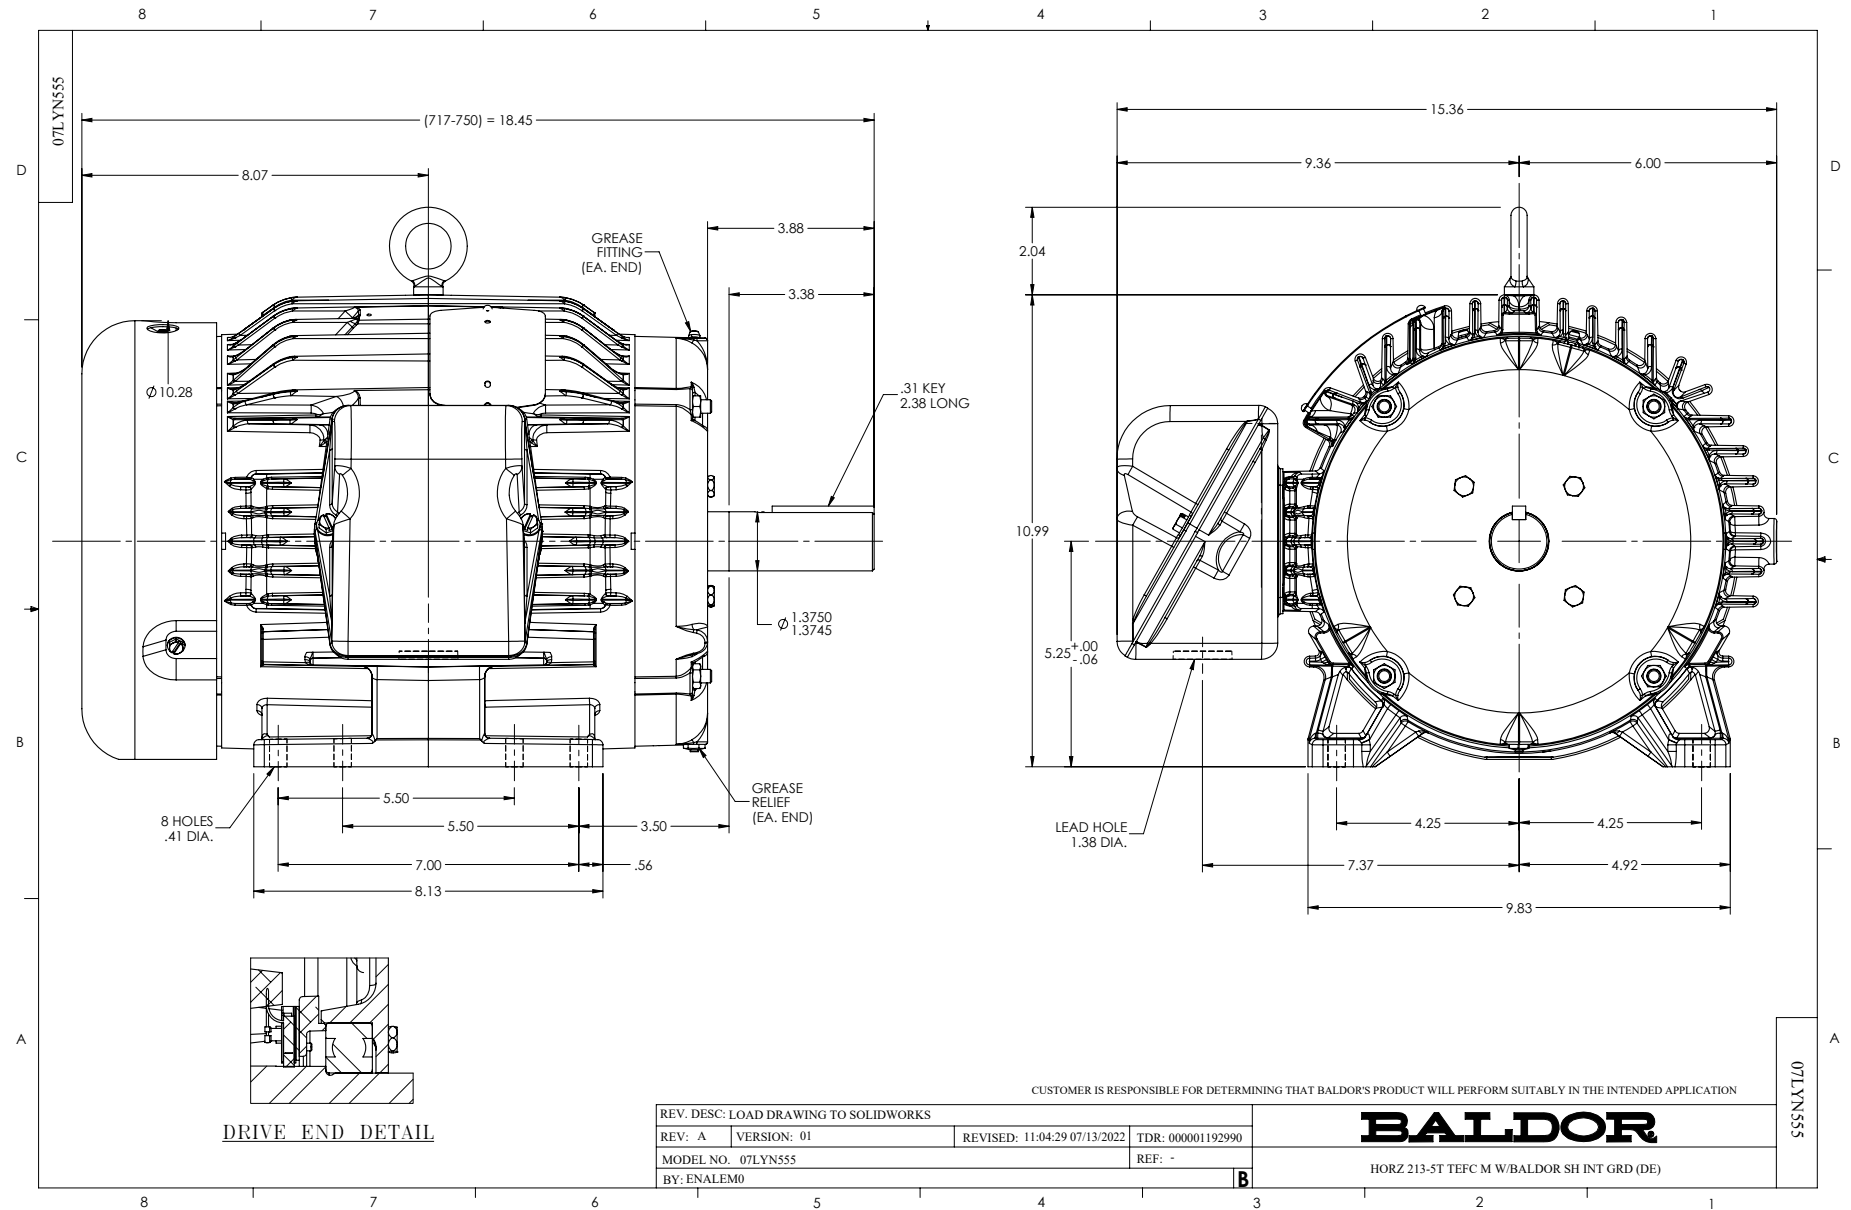

CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005