



Customer information packet

EM3769T-G

7.5HP, 3510RPM, 3PH, 60HZ, 213T, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.000 A @ 460.0 V 18.400 A @ 208.0 V 18.000 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater

Part detail

Revision	E
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	07WGY328
Layout	07LYL783
Eff. date	04-29-2024
CD Diagram	CD0005
Poles	02
Leads	9#14
Proprietary	False
Created date	04-12-2019

High Voltage Full Load Amps	9.0 a
Insulation Class	H
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	H
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0726M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.45 IN
Power Factor	86
Product Family	General Purpose
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.375 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	3510 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3441LUA

CAT.NO.	EM3769T-G									
SPEC	07-0000-0089									
HP	7.5									
VOLTS	230/460									
AMPS	18/9									
RPM	3510									
FRAME	213T		HZ		60		PH		3	
SF	1.15	CODE	H	DES	B	CLASS		H		
NEMA NOM. EFF	89.5		PF	86						
RATING	40C AMB-CONT									
CC	010A									
ENCL	TEFC	SER								
DE	6307		ODE		6206					
VPWM INVERTER READY										
CT6-60H(10:1)VT3-60H(20:1										
50HZ 7.5HP 190/380V 21/10.5A										SF1.0

AC Induction Motor Performance Data

Record # 64042

Typical performance - not guaranteed values

Winding: 07WGY328-R019			Type: 0726M		Enclosure: TEFC		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		7.5		Full Load Torque		11.2 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		18/9		Breakdown Torque		38.8 LB-FT	
R.P.M.		3510		Pull-up Torque		20.4 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		23.5 LB-FT	
NEMA Design Code		B		KVA Code	H	Starting Current	61.1 A
Service Factor (S.F.)		1.15		No-load Current		3.54 A	
NEMA Nom. Eff.		89.5	Power Factor	86	Line-line Res. @ 25°C		1.19 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load	44°C
S.F. Amps						Temp. Rise @ S.F. Load	54°C
						Locked-rotor Power Factor	33.8
						Rotor inertia	0.237 LB-FT2

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	52	74	82	87	90	89	89
Efficiency	83.7	89.3	90.4	90.6	89.5	88.2	89.9
Speed	3581	3559	3537	3512	3486	3456	3496
Line amperes	4.04	5.31	7.04	8.9	10.9	13.3	10.1


ABB Motors and Mechanical Inc.


WINDING # 07WGY328

Typical performance - not guaranteed values.


7.5 HP 3 PH 60 HZ 3510 RPM 460 V 0726M

TORQUES (LB-FT): PO=38.8 PU=20.4 LR=23.5 LRA=61.1

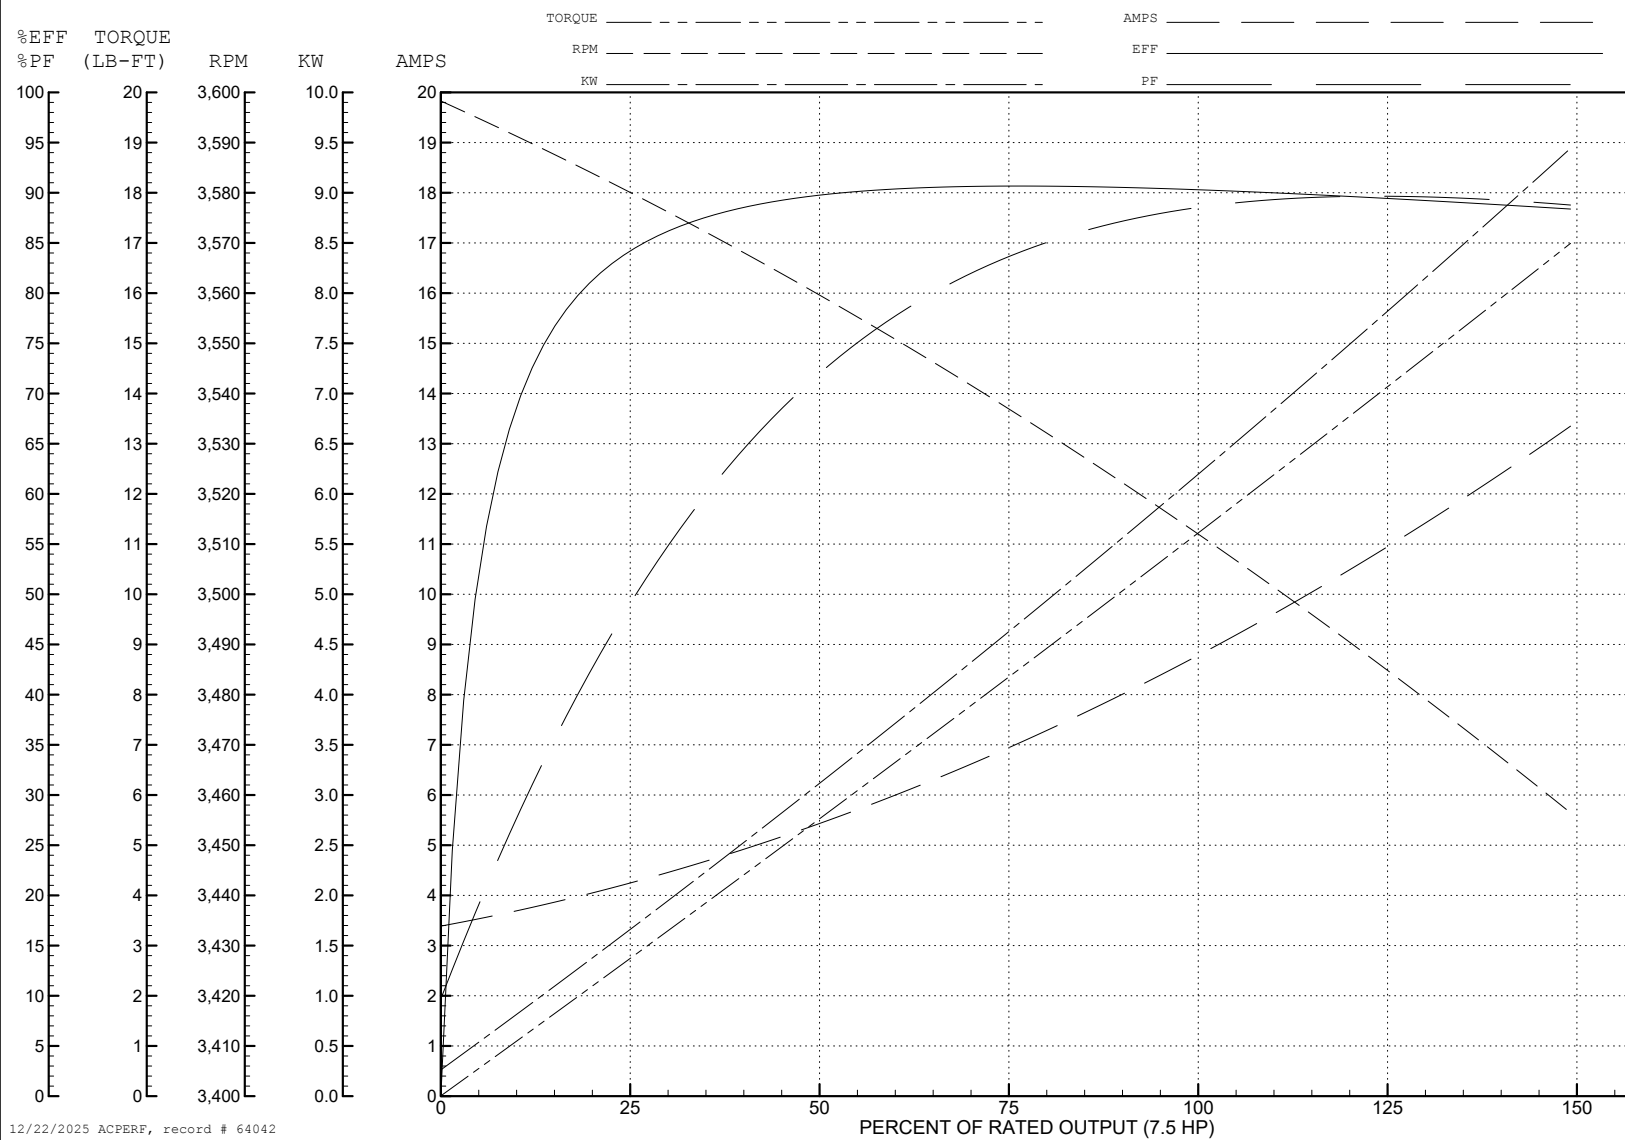


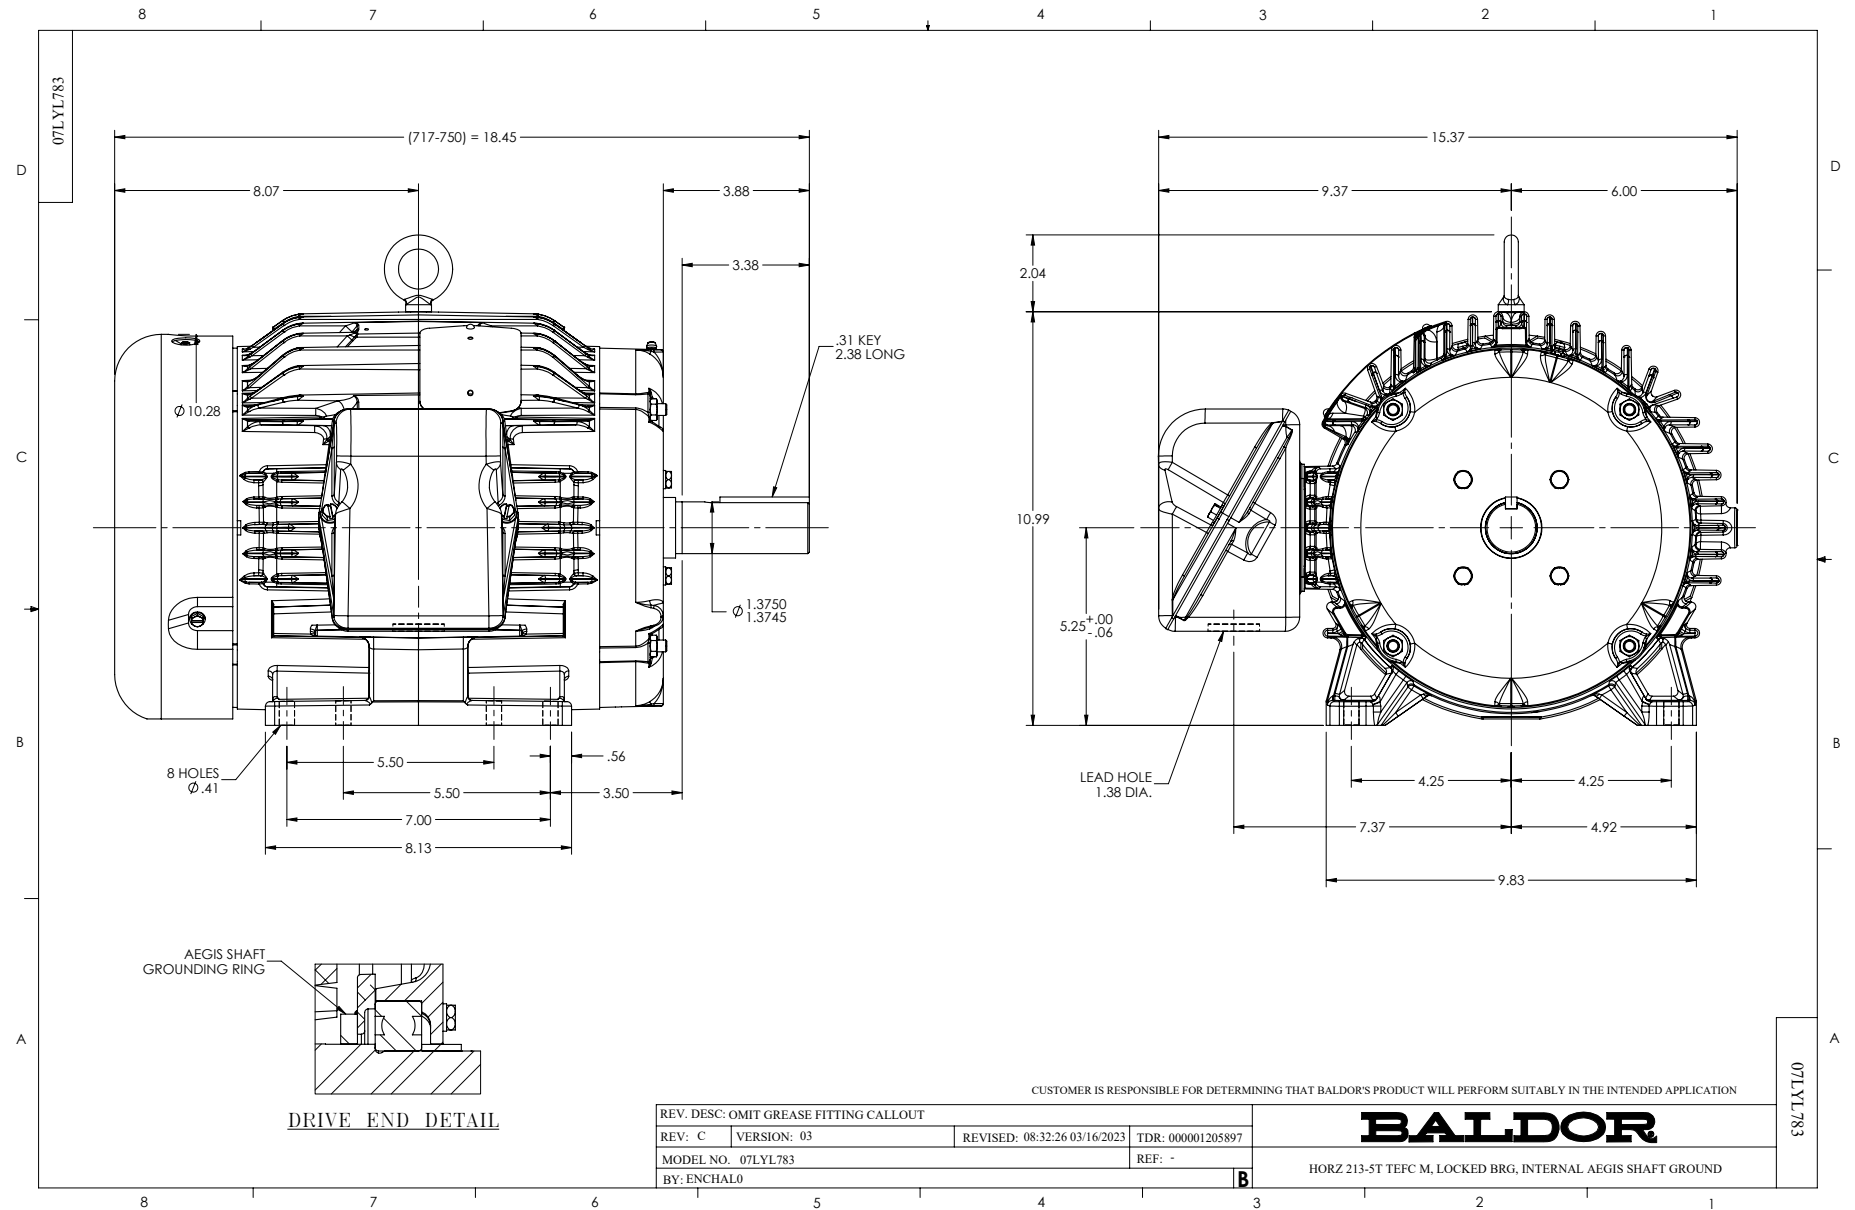

CD0005

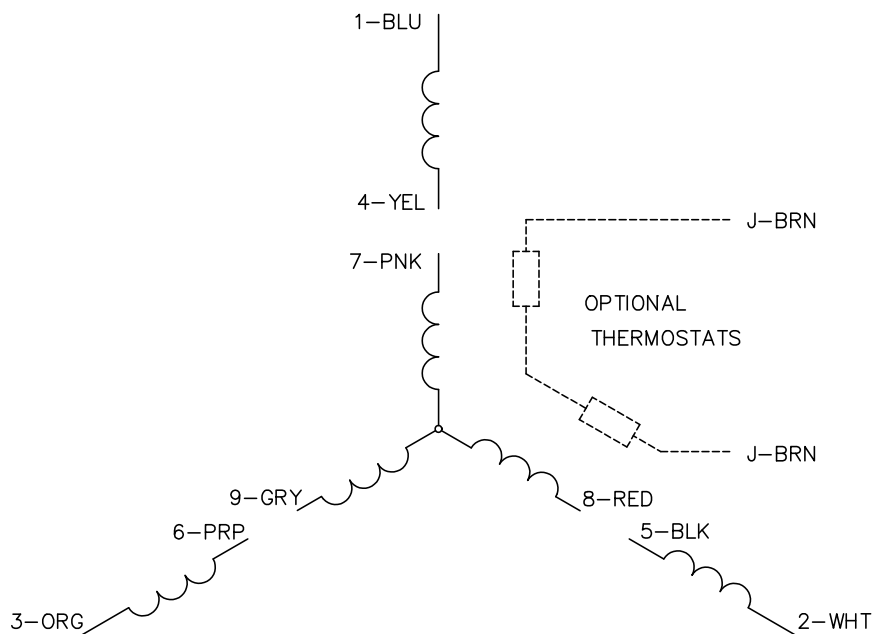LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005