



Customer information packet

EM4407T-4

200HP, 1785RPM, 3PH, 60HZ, 447T, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	447T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	200.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	222.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	96.2 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	222.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Motor Lead Quantity/Wire Size	6 @ 1/0 AWG
Motor Standards	NEMA
Motor Type	A44120M

Part detail

Revision	Q
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG1462
Layout	617435-137
Eff. date	12-06-2024
CD Diagram	416820-008
Poles	04
Leads	6#1/0
Proprietary	False
Created date	09-08-2015

Mounting Arrangement	F1
Number of Poles	4
Overall Length	48.24 IN
Power Factor	87
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1785 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate


NP2349L


SPEC NO.	A44-0002-4969			CAT.NO.	EM4407T-4				FRAME	447T	
HP	200	VOLTS	460		PHASE	3	DESIGN	B	TYPE	P	
RPM	1785	AMPS	222		HZ	60	AMB	40	SF	1.15	
DRIVE END BEARING	90BC03J30X		DUTY	CONT	INSUL.CLASS		F				
OPP D.E. BEARING	90BC03J30X		ENCL	TEFC	CODE	G					
SER.NO.				POWER FACTOR	87	NEMA-NOM-EFFICIENCY			96.2		
						MAX CORR KVAR	34	GUARANTEED EFFICIENCY		95.4	
						NEMA NOM/CSA QUOTED EFF					
						MOTOR WEIGHT					


Accessories

Part number	Description	Multiplier
089490106A	G28 C-FACE BRKT MACH-6318 089490105WCA	P1
089490110A	D-FLANGE BRKT, G28 089490109WCA	P1

REL. S.O.	FRAME 447T	HP 200	TYPE P	PHASE/ HERTZ 3/60	RPM 1785	VOLTS 460
AMPS 222	DUTY CONT	AMB °C/ INSUL. 40/F	S.F. 1.15	NEMA DESIGN B	CODE LETTER G	ENCL. TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
----	418143052CE	----	----	.0169		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	62.0	1800	4.07	0	
1/4	50.0	88.3	1796	56.3	94.3	
2/4	100	126	1793	77.4	96.2	
3/4	150	172	1789	84.8	96.4	
4/4	200	222	1785	87.6	96.2	
5/4	250	276	1781	88.4	95.8	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	147	865	1428	
PULL UP		540	123	726	1332	
BREAKDOWN		1730	268	1579	770	
FULL LOAD		1785	100	588	222	
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA XE MOTOR-CALCULATED DATA-NEMA NOM. EFF. 96.2 PCT.						
 A MEMBER OF THE ABB GROUP		DR. BY C.D. CK. BY E.J. CHRISTIAN APP. BY E.J. CHRISTIAN DATE 07/06/17		A-C MOTOR PERFORMANCE DATA A44WG1462-R001 ISSUE DATE 01/16/20		

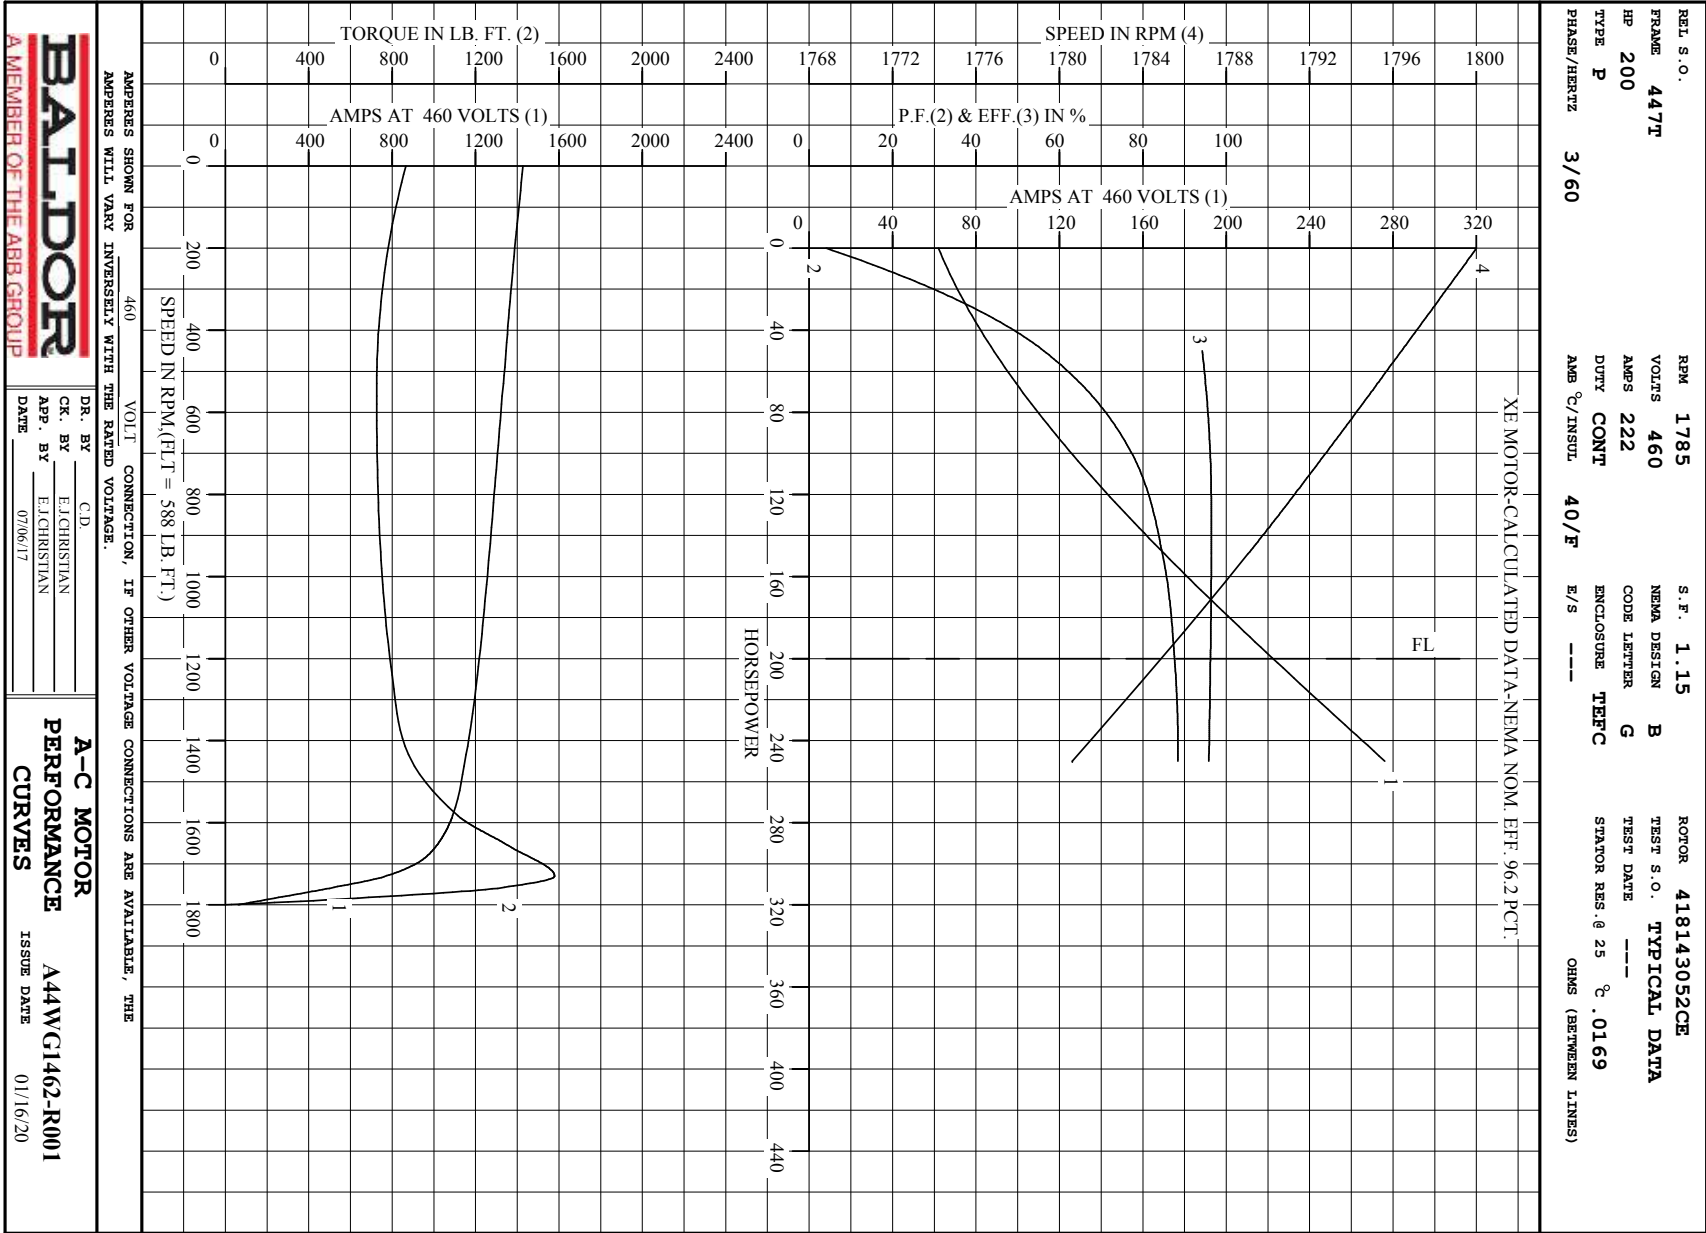

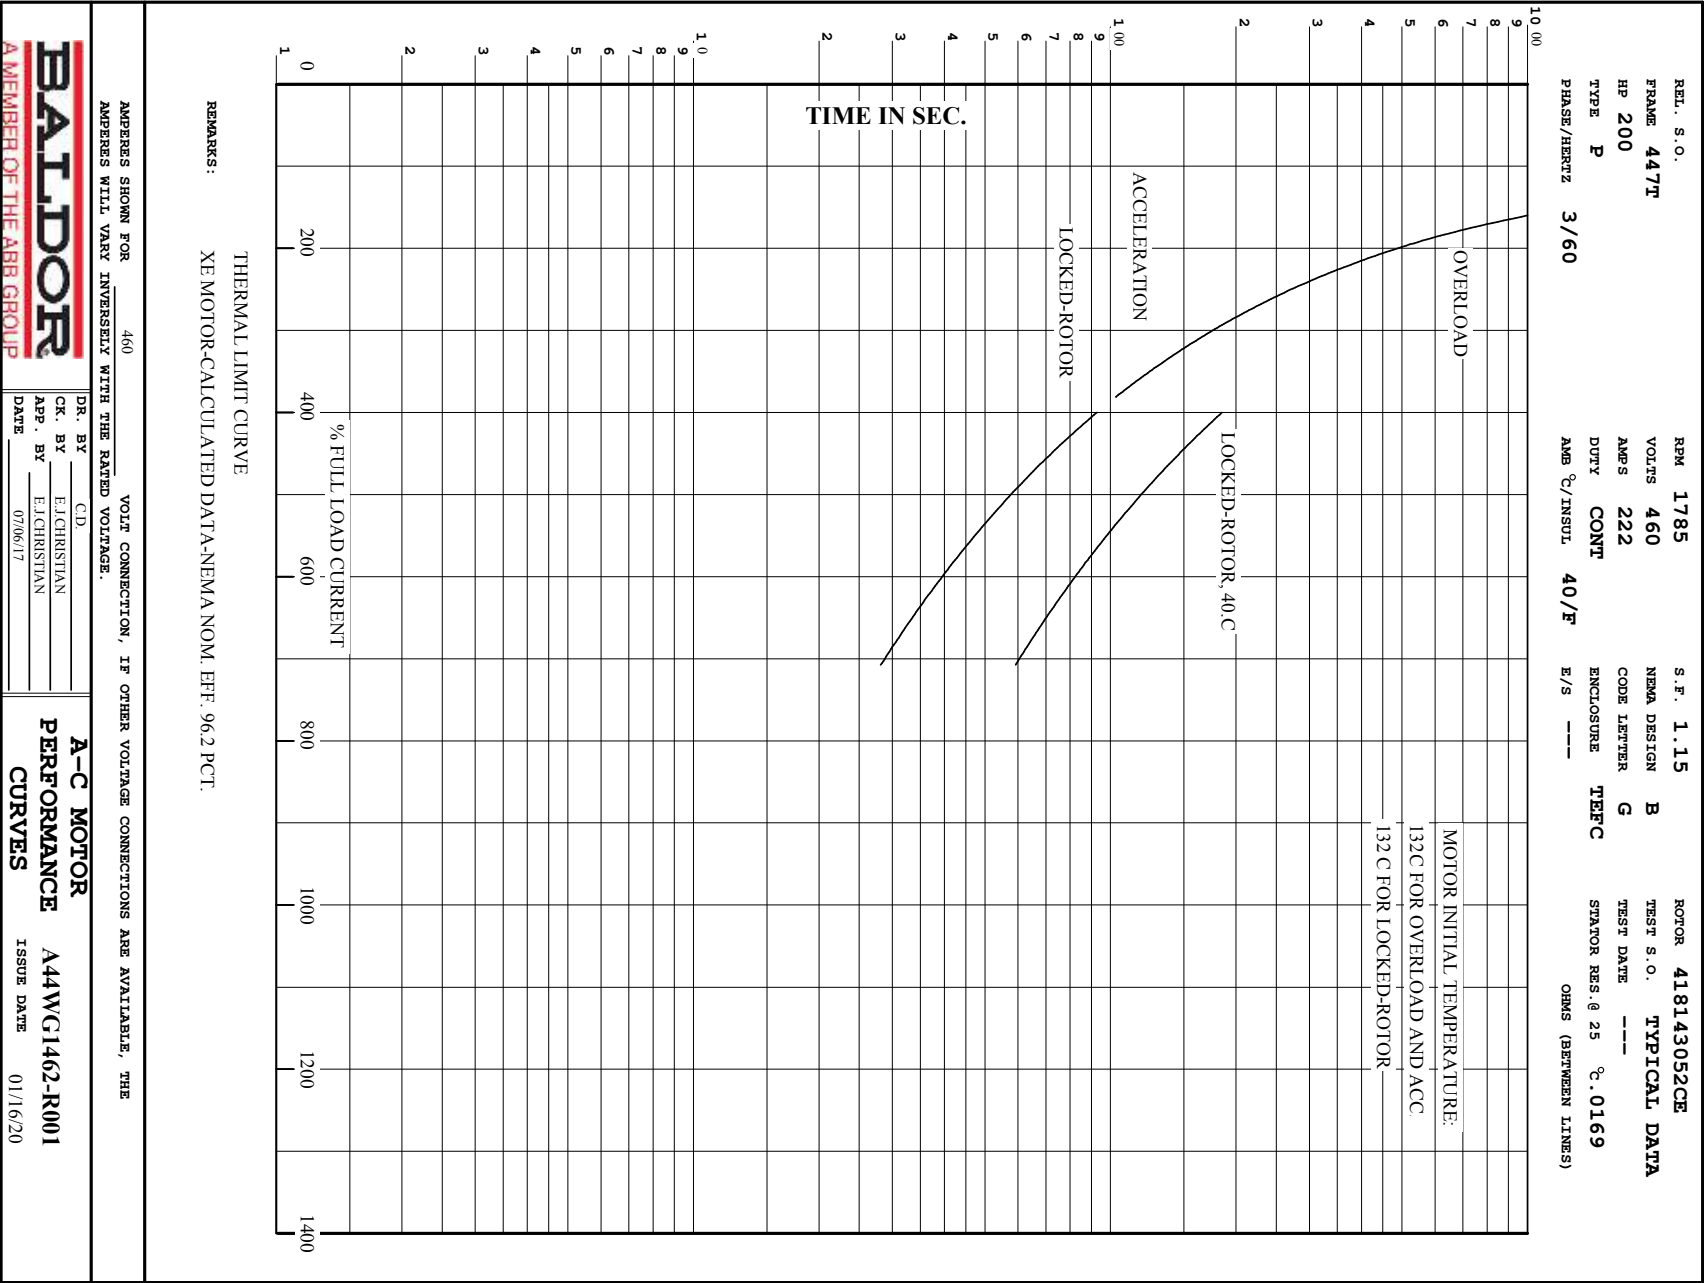



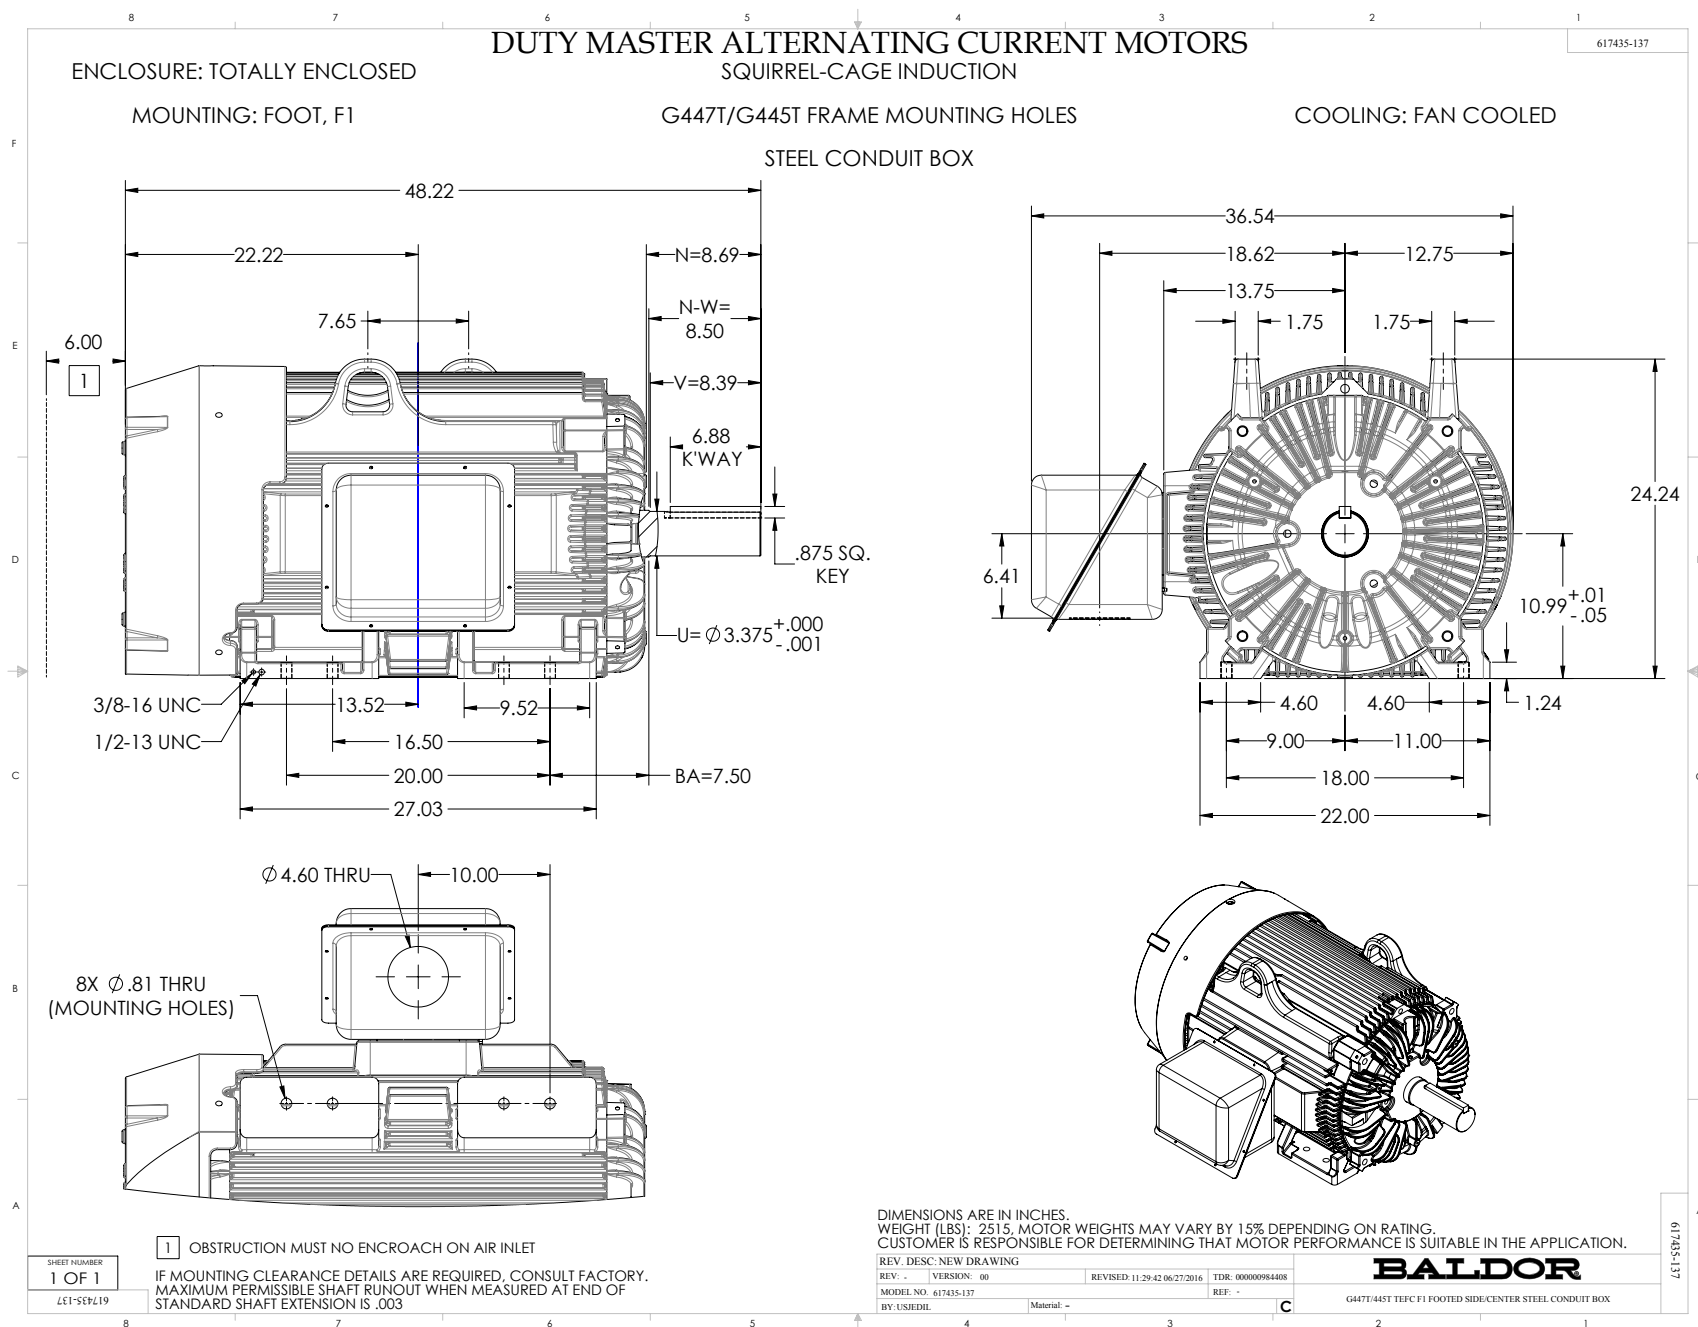


416820-008

A-C MOTOR
CONNECTION DIAGRAM

STANDARD 6 LEAD

Y START - DELTA RUN

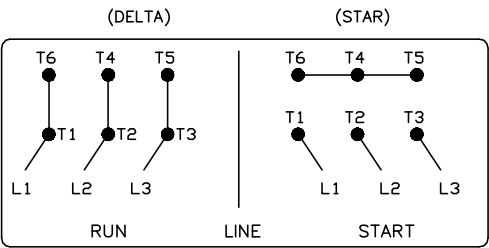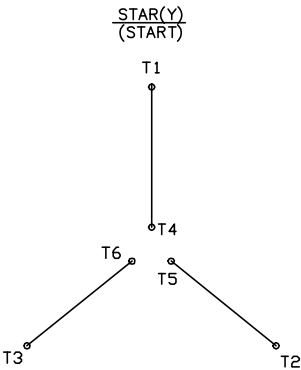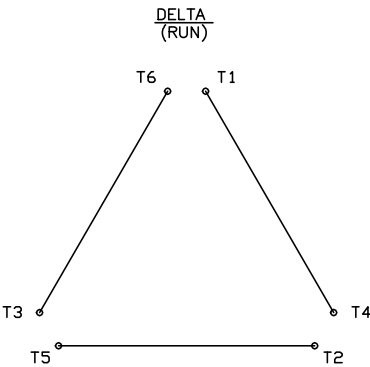

(N. P. 1767-DC)

REV. DESC: ADDED T4 TO Y CONNECT DIAGRAM

REV. LTR: D

VERSION: 04

TDR: 000000847713

FILE: \RAG\00001\808

REVISED: 10: 41: 26 04/08/2014

BY: RAGJSS1

MTL: -

BALDOR

CONNECT DIAGRAM STD 6 LEAD Y START DELTA RUN

SH 1 of 1

416820-008