



Customer information packet

EM4409T-4

100HP, 1190RPM, 3PH, 60HZ, 444T, A44064M, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	444T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	100.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSAUSEEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	119.000 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	95.0 %
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	119.0 a
Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	G
Lifting Lugs	No Lifting Lugs
Motor Lead Quantity/Wire Size	3 @ 2 AWG
Motor Standards	NEMA
Motor Type	A44064M
Mounting Arrangement	F1

Part detail

Revision	R
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A44WG3905
Layout	617435-164
Eff. date	09-25-2025
CD Diagram	416820-036
Poles	06
Leads	3#2
Proprietary	False
Created date	08-13-2012

Number of Poles	6
Overall Length	44.75 IN
Power Factor	82
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	3.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1190 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None

Nameplate

NP2349L

SPEC NO.	P44G3900			CAT.NO.	EM4409T-4				FRAME	444T			
HP	100	VOLTS	460		PHASE	3	DESIGN	B	TYPE	P			
RPM	1190	AMPS	119		HZ	60	AMB	40	SF	1.15			
DRIVE END BEARING	90BC03J30X		DUTY	CONT	INSUL.CLASS			F					
OPP D.E. BEARING	90BC03J30X		ENCL	TEFC	CODE	G							
SER.NO.				POWER FACTOR		82		NEMA-NOM-EFFICIENCY			95		
						MAX CORR KVAR		27.0		GUARANTEED EFFICIENCY		94.1	
						NEMA NOM/CSA QUOTED EFF							
											MOTOR WEIGHT		

Accessories


Part number	Description	Multiplier
089490106A	G28 C-FACE BRKT MACH-6318 089490105WCA	P1
089490110A	D-FLANGE BRKT, G28 089490109WCA	P1

S/O	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	444T	100	P	3/60	1190	460
AMPS	DUTY	AMB °C/ INSUL	S.F.	NEMA DESIGN	CODE LETTER	ENCLOSURE
119	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR	TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)		
497780	418143098VE	---	---	.0547		
PERFORMANCE						
LOAD	HP	AMPERES	RPM	% POWER FACTOR	% EFFICIENCY	
NO LOAD	0	39.9	1200	4.01	0	
1/4	25.0	55.8	1197	45.5	92.5	
2/4	50.0	72.5	1194	68.0	95.0	
3/4	75.0	94.3	1191	78.0	95.3	
4/4	100	119	1188	82.5	95.0	
5/4	125	147	1184	84.3	94.4	
SPEED TORQUE						
		RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES	
LOCKED ROTOR		0	142	627	730	
PULL UP		168	126	558	717	
BREAKDOWN		1146	266	1175	438	
FULL LOAD		1188	100	442	119	
AMPERES SHOWN FOR 460 VOLT CONNECTION. IF OTHER CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.						
TYPICAL DATA NEMA NOMINAL EFFICIENCY = 95.0 PCT.						
		DRAWN BY: W.L. SMITH CHECKED BY: J.J. HARRISON APPROVED BY: W.L. SMITH DATE: 12/06/10		AC MOTOR PERFORMANCE DATA		A44W/G3905-R001 DATE ISSUED 08/09/19

USERCHRI

Printed on 06/04/2020 1:33 PM

REL.S.O.	FRAME 444T	RPM 1190	S.F. 1.15	ROTOR 418143098YE
HP 100	VOLTS 460	AMPS 119	NEMA DESIGN B	TEST S.O. TYPICAL DATA
TYPE P	DUTY CONT	CODE LETTER G	ENCLOSURE TEFC	TEST DATE --
PHASE / HERTZ 3/60	AMB °C / INSUL. 40/F	E/S 497780		STATOR RES. @ 25°C .0547
				OHMS (BETWEEN LINES)

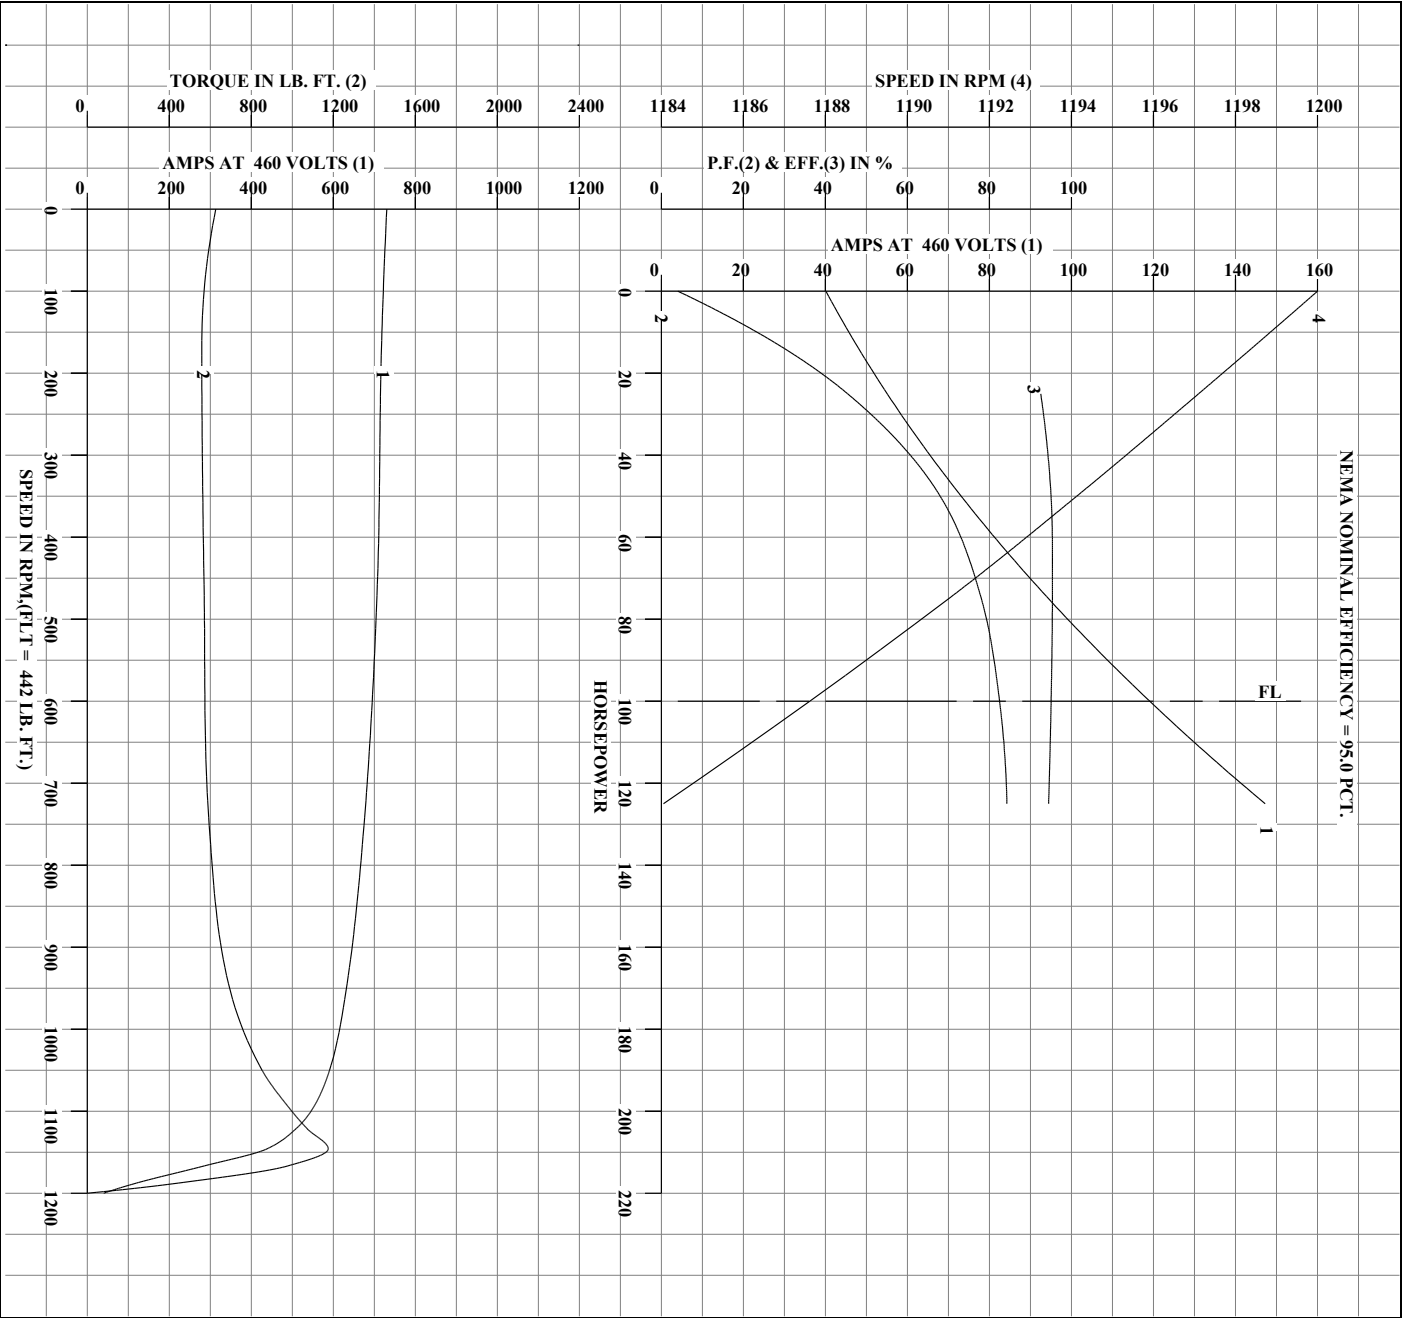

AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.



DRAWN BY: W.L. SMITH
CHECKED BY: J.J. HARRISON
APPROVED BY: W.L. SMITH
DATE: 12/06/10

AC MOTOR
PERFORMANCE
DATA


A44WCG3905-R001

ISSUE DATE 08/09/19

USERCHRI

Printed on 06/04/2020 1:33 PM

REL.S.O.	RPM 1190	S.F. 1.15	ROTOR 418143098YE
FRAME 444T	VOLTS 460	NEMA DESIGN B	TEST S.O. TYPICAL DATA
HP 100	AMPS 119	CODE LETTER G	TEST DATE ---
TYPE P	DUTY CONT	ENCLOSURE TEFC	STATOR RES. @ 25°C .0547
PHASE / HERTZ 3/60	AMB °C / INSUL 40/F	E/S 497780	OHMS (BETWEEN LINES)

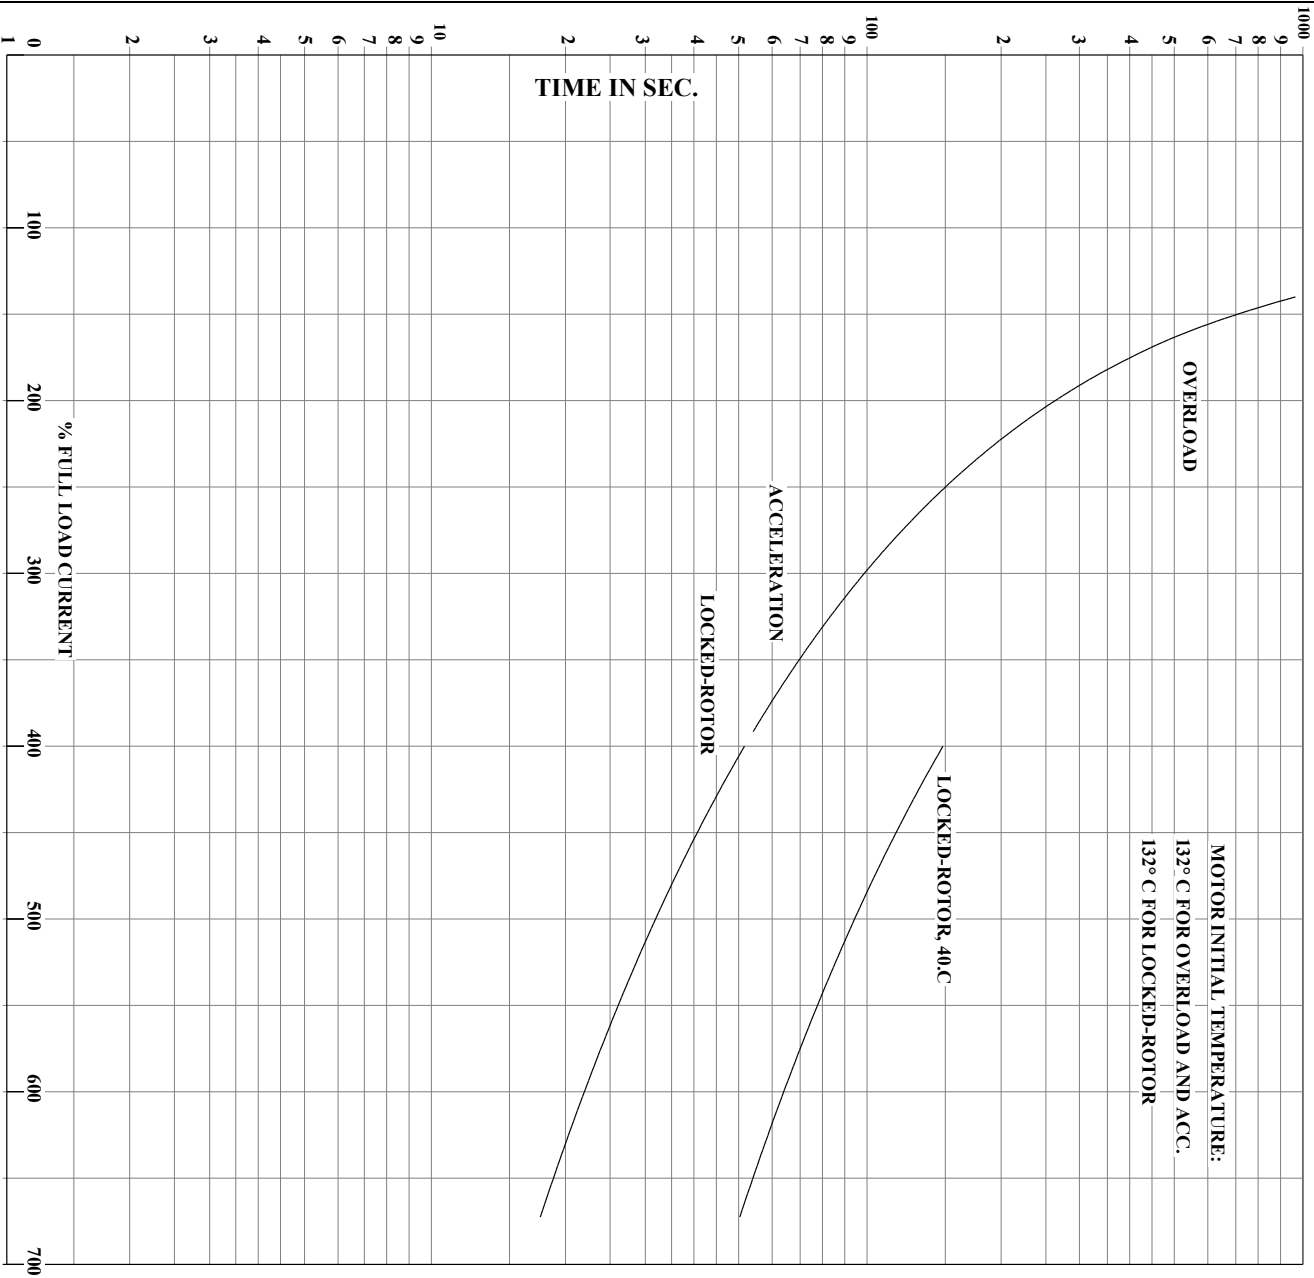


Thermal Limit Curve
NEMA Nominal Efficiency = 95.0 PCT.


AMPERES SHOWN FOR 460 VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

	DRAWN BY: W.L. SMITH CHECKED BY: J.J. HARRISON APPROVED BY: W.L. SMITH DATE: 12/06/10	AC MOTOR PERFORMANCE DATA	A44WCG3905-R001 ISSUE DATE 08/09/19
--	--	---------------------------------	--

USERCHRI


Printed on 06/04/2020 1:33 PM

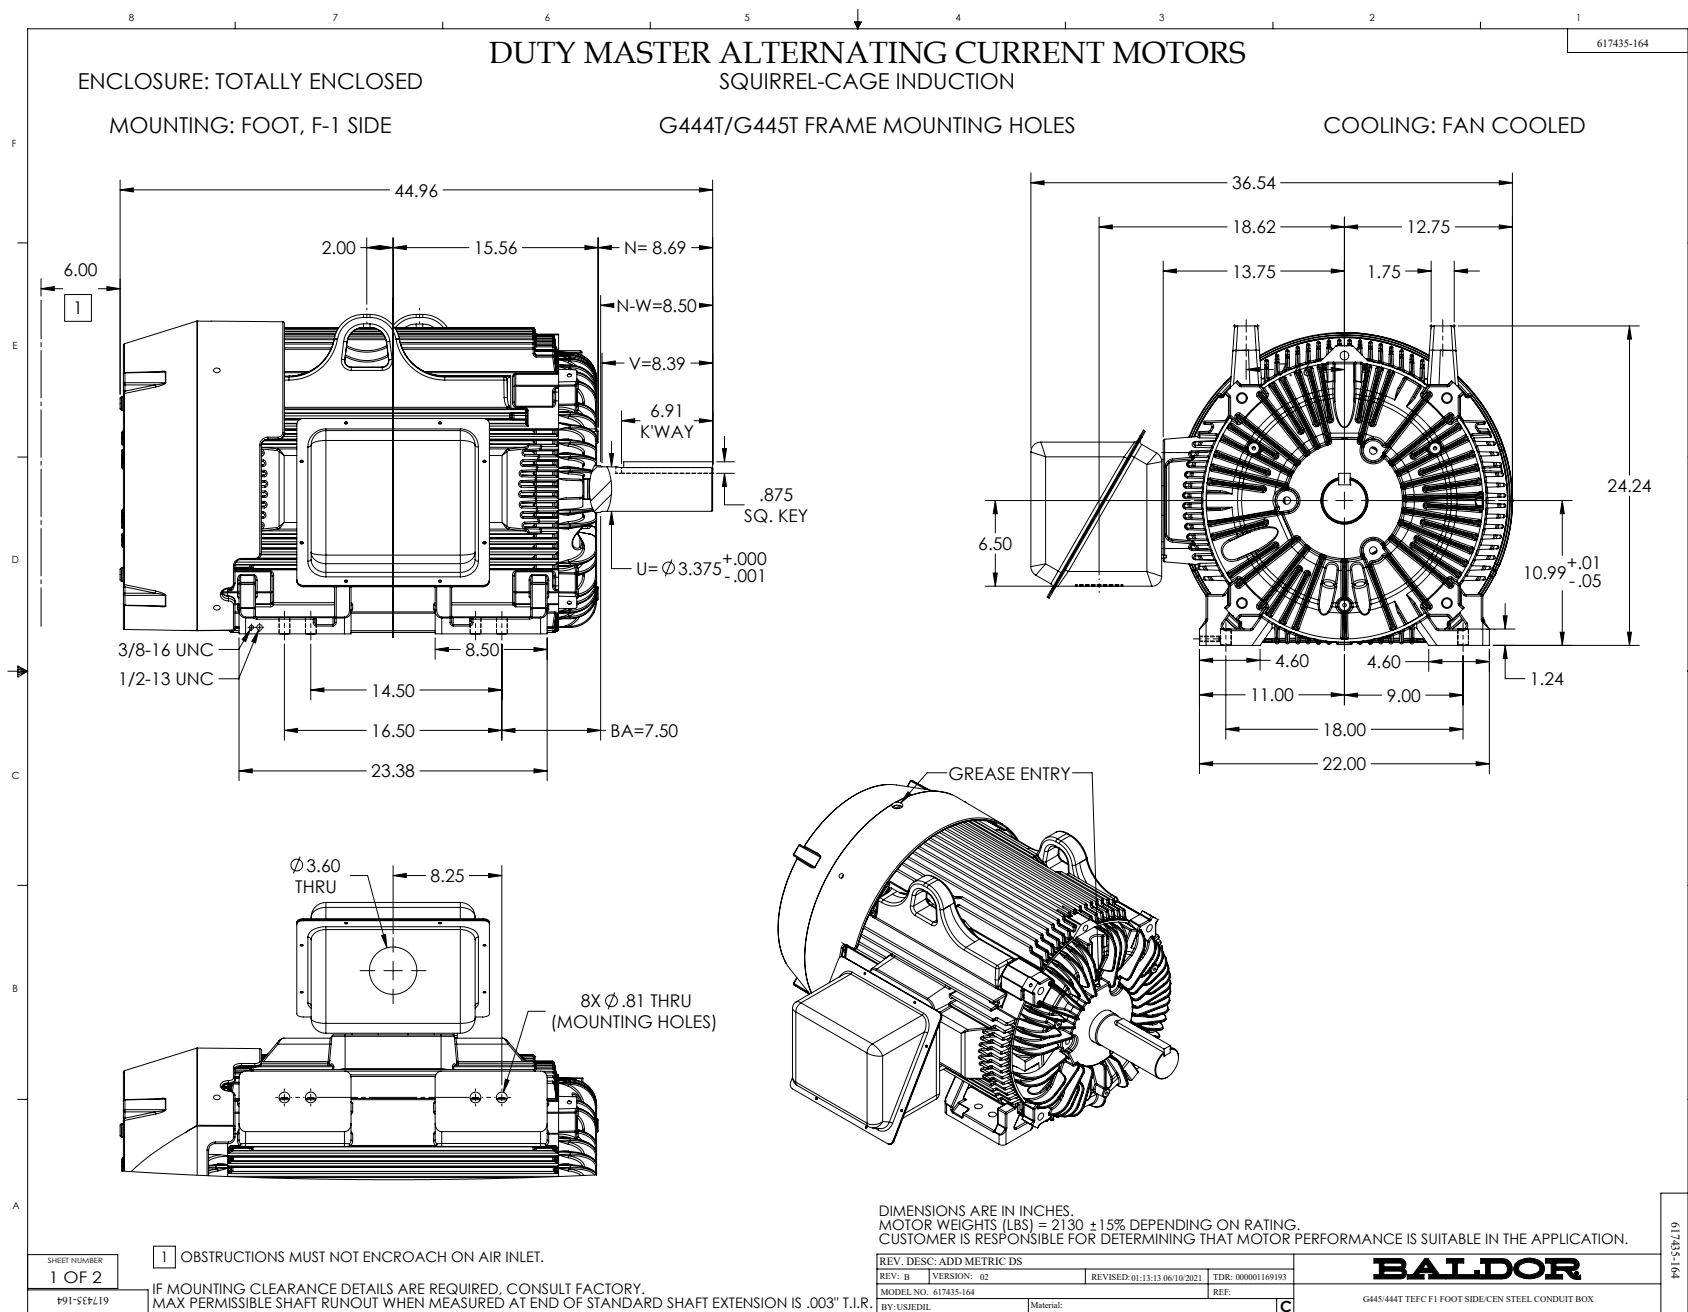

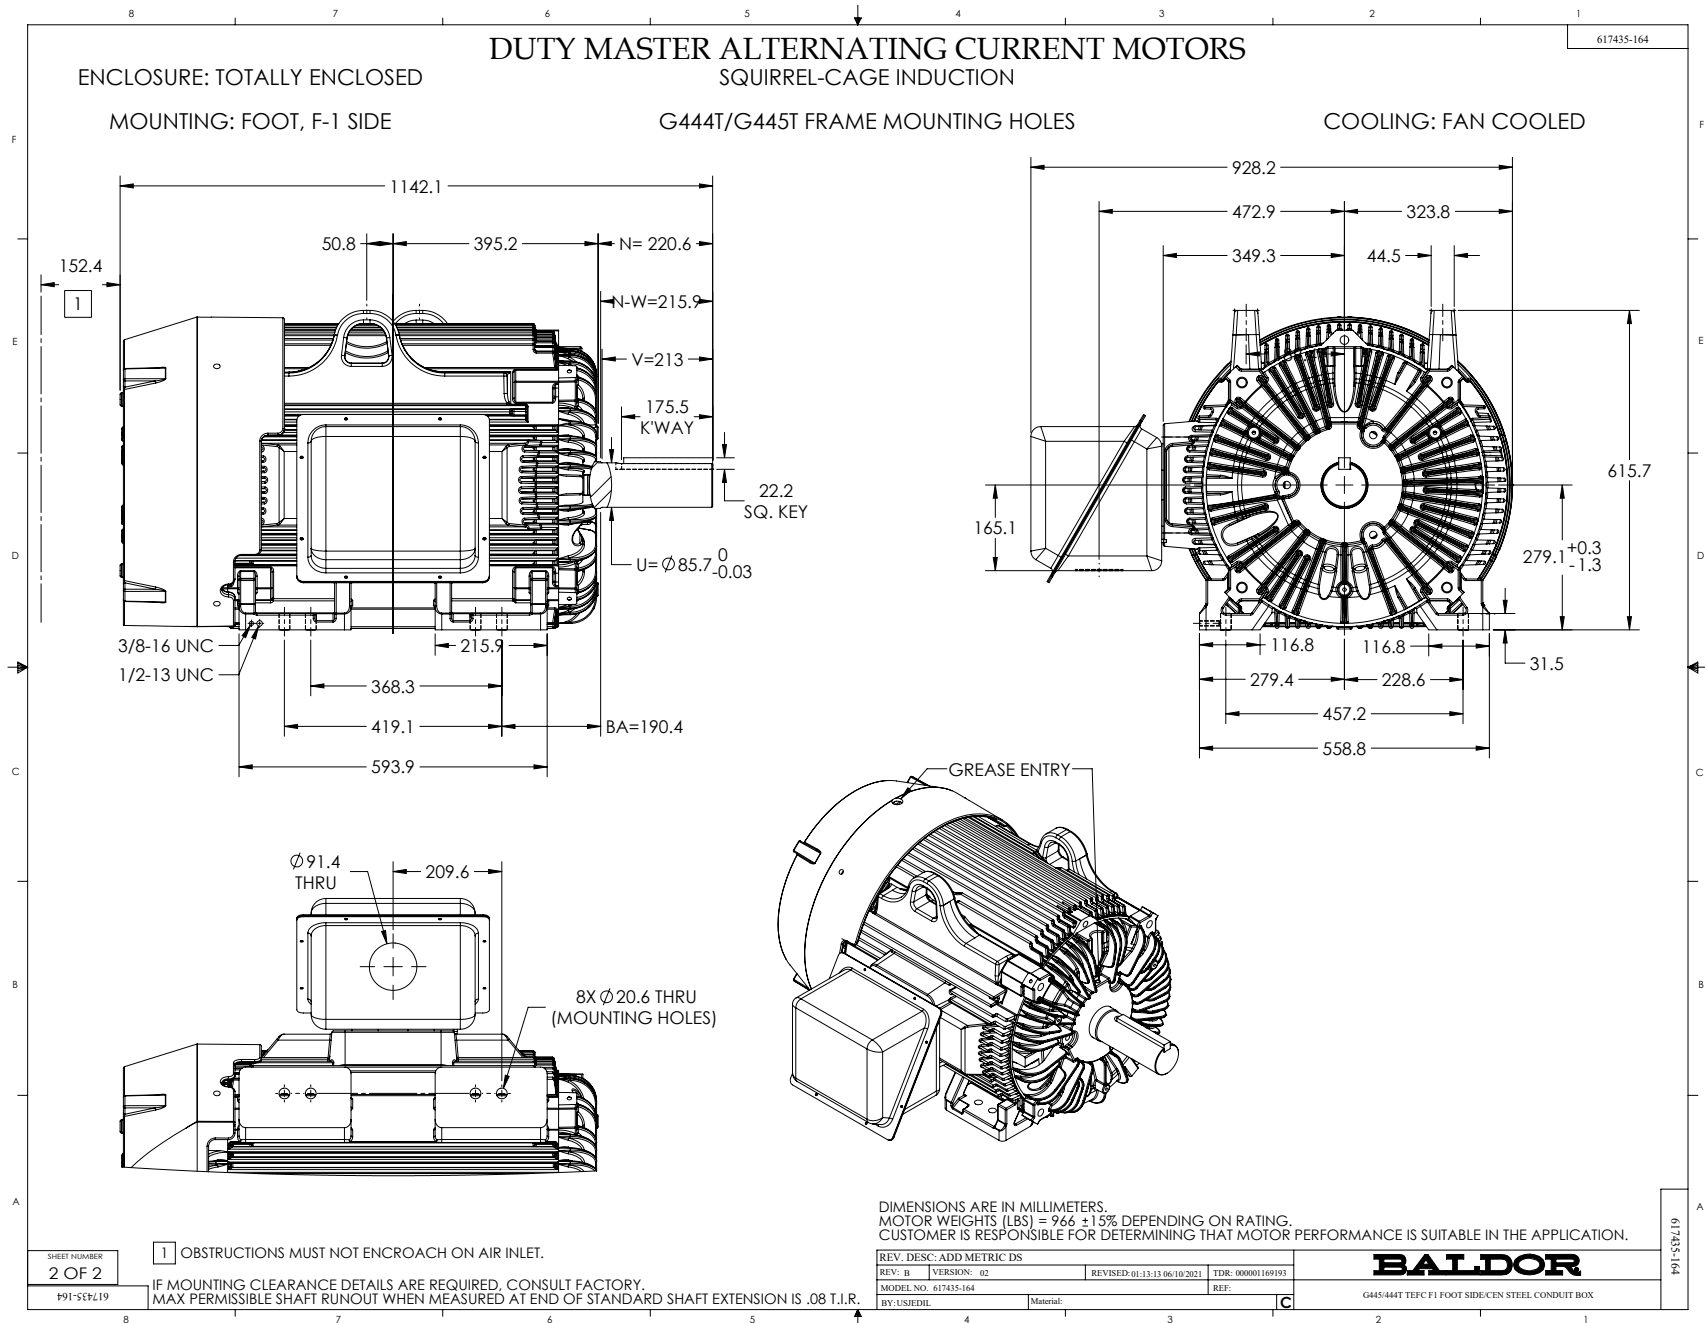

416820-036

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 3 LEAD CONNECTED

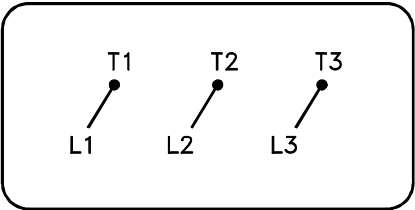

(N.P. 1575-BA)

416820-036

REV. DESC: LOADED TO BUS, C/R 335225		
REV. LTR: -	VERSION: 00	TDR: 000000538207
FILE: \MGA\00000\682		REVISED: 11: 54: 06 04/30/2010
MTL: -		BY: RAGRA

BALDOR

CONN DIAG - STANDARD 3 LEAD
SH 1 of 1