



Customer information packet

EWDM3613T

5HP, 3450RPM, 3PH, 60HZ, 184T, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	11.800 A @ 230.0 V 5.900 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	5.9 a

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	36WGS042
Layout	36LYK186
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	02
Leads	9#16
Proprietary	False
Created date	12-03-2019

Insulation Class	F
Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3630M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	16.54 IN
Power Factor	91
Product Family	Wash Down
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L									
CAT.NO.	EWD3613T								
SPEC.	36-0000-0235								
HP	5								
VOLTS	230/460								
AMP	11.8/5.9								
RPM	3450								
FRAME	184T		HZ	60			PH	3	
SER.F.	1.15	CODE	L	DES	A	CLASS	F		
NEMA-NOM-EFF	88.5	PF	91						
RATING	40C AMB-CONT								
CC	010A								
DE	6206		ODE	6205					
ENCL	TEFC	SN							
BLANK	20:1CT, 20:1VT,1.00SF								

AC Induction Motor Performance Data

Record # 35706

Typical performance - not guaranteed values

Winding: 36WGS042-R003			Type: 3630M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		5	Full Load Torque		7.64 LB-FT		
Volts		208-230/460	Start Configuration		direct on line		
Full Load Amps		12-11.8/5.9	Breakdown Torque		33.7 LB-FT		
R.P.M.		3450	Pull-up Torque		23.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		27.5 LB-FT	
NEMA Design Code		A	KVA Code	L	Starting Current		57.2 A
Service Factor (S.F.)		1.15	No-load Current		1.68 A		
NEMA Nom. Eff.		88.5	Power Factor	91	Line-line Res. @ 25°C		2.27 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		72°C
S.F. Amps					Temp. Rise @ S.F. Load		88°C
					Locked-rotor Power Factor		45
					Rotor inertia		0.134 LB-FT2

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	62	81	88	91	93	94	92
Efficiency	83.2	88.4	89.1	88.3	87	85.8	87.5
Speed	3569	3537	3504	3466	3428	3385	3443
Line amperes	2.24	3.26	4.47	5.85	7.26	8.8	6.7


ABB Motors and Mechanical Inc.

WINDING # 36WGS042

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 3450 RPM 460 V 3630M

TORQUES (LB-FT): PO=33.7 PU=23.5 LR=27.5 LRA=57.2

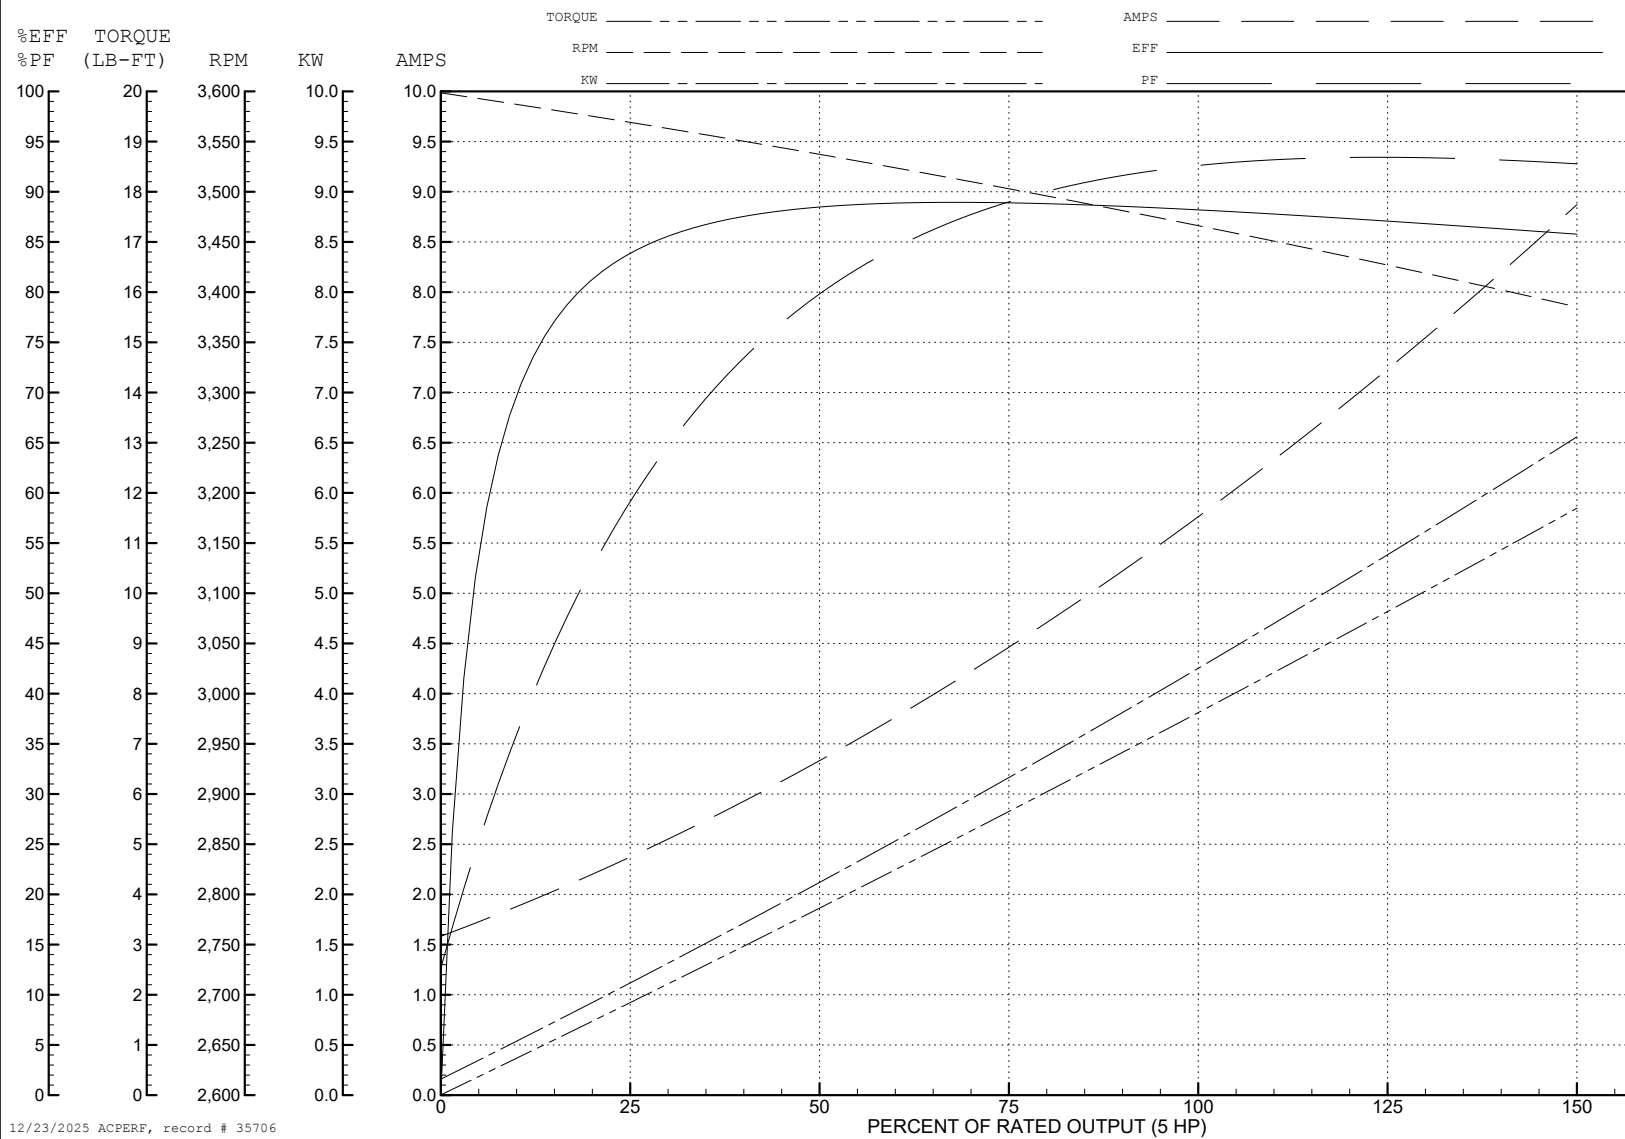

AC Induction Motor Performance Data

Record # 35722

Typical performance - not guaranteed values

Winding: 36WGS042-R003			Type: 3630M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		5	Full Load Torque		7.64 LB-FT			
Volts		230/460	Start Configuration		direct on line			
Full Load Amps		11.8/5.9	Breakdown Torque		33.7 LB-FT			
R.P.M.		3450	Pull-up Torque		23.5 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		27.5 LB-FT		
NEMA Design Code		A	KVA Code	L	Starting Current		57.2 A	
Service Factor (S.F.)		1.15		No-load Current		1.68 A		
NEMA Nom. Eff.		88.5	Power Factor		91	Line-line Res. @ 25°C		2.27 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		72°C		
S.F. Amps				Temp. Rise @ S.F. Load		88°C		
				Locked-rotor Power Factor		45		
				Rotor inertia		0.134 LB-FT2		

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	62	81	88	91	93	94	92
Efficiency	83.2	88.4	89.1	88.3	87	85.8	87.5
Speed	3569	3537	3504	3466	3428	3385	3443
Line amperes	2.24	3.26	4.47	5.85	7.26	8.8	6.7

ABB Motors and Mechanical Inc.

WINDING # 36WGS042

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 3450 RPM 460 V 3630M

TORQUES (LB-FT): PO=33.7 PU=23.5 LR=27.5 LRA=57.2

