



Customer information packet

EWDM4107T

25HP, 3520RPM, 3PH, 60HZ, 284TS, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	284TS
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	25.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA CSA EEV NEMA PREMIUM UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	58.000 A @ 230.0 V 29.000 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	91.7 %
Electrically Isolated Bearing	Not Electrically Isolated
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater

Part detail

Revision	J
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	09WGT577
Layout	09LYK556
Eff. date	02-14-2024
CD Diagram	CD0005
Poles	02
Leads	9#10
Proprietary	False
Created date	08-14-2019

High Voltage Full Load Amps	29.0 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	IP55
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	5400 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0944M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	24.47 IN
Power Factor	88
Product Family	Washdown Features
Pulley Face Code	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3520 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L											
CAT.NO.	EWD4107T										
SPEC.	09-0000-1720										
HP	25										
VOLTS	230/460 10:1 CT/VT										
AMP	58/29										
RPM	3520										
FRAME	284TS		HZ	60			PH	3			
SER.F.	1.00	CODE	J	DES	A		CLASS	F			
NEMA-NOM-EFF	91.7	PF	88								
RATING	40C AMB-CONT										
CC	010A										
DE	6311		ODE	6208							
ENCL	TEFC	SN									
BLANK	1.15SF ON SINEWAVE										

AC Induction Motor Performance Data

Record # 72672

Typical performance - not guaranteed values

Winding: 09WGT577-R001			Type: 0944M		Enclosure: TEFC		
Nameplate Data			460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		25	Full Load Torque		37.39 LB-FT		
Volts		230/460	Start Configuration		direct on line		
Full Load Amps		58/29	Breakdown Torque		153 LB-FT		
R.P.M.		3520	Pull-up Torque		58.5 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		75 LB-FT	
NEMA Design Code		A	KVA Code	J	Starting Current		223 A
Service Factor (S.F.)		1.15		No-load Current		10.1 A	
NEMA Nom. Eff.		91.7	Power Factor	88	Line-line Res. @ 25°C		0.3381 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		74°C	
S.F. Amps				Temp. Rise @ S.F. Load		91°C	
				Locked-rotor Power Factor		29.7	

Load Characteristics 460 V, 60 Hz, 25 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	55	76	84	88	89	90	89
Efficiency	87.6	91.6	92.2	91.8	90.9	89.8	91.3
Speed	3580.5	3562.7	3544.2	3524	3501.4	3477.9	3510
Line amperes	12.3	16.9	22.7	29.1	36.1	43.5	33.3

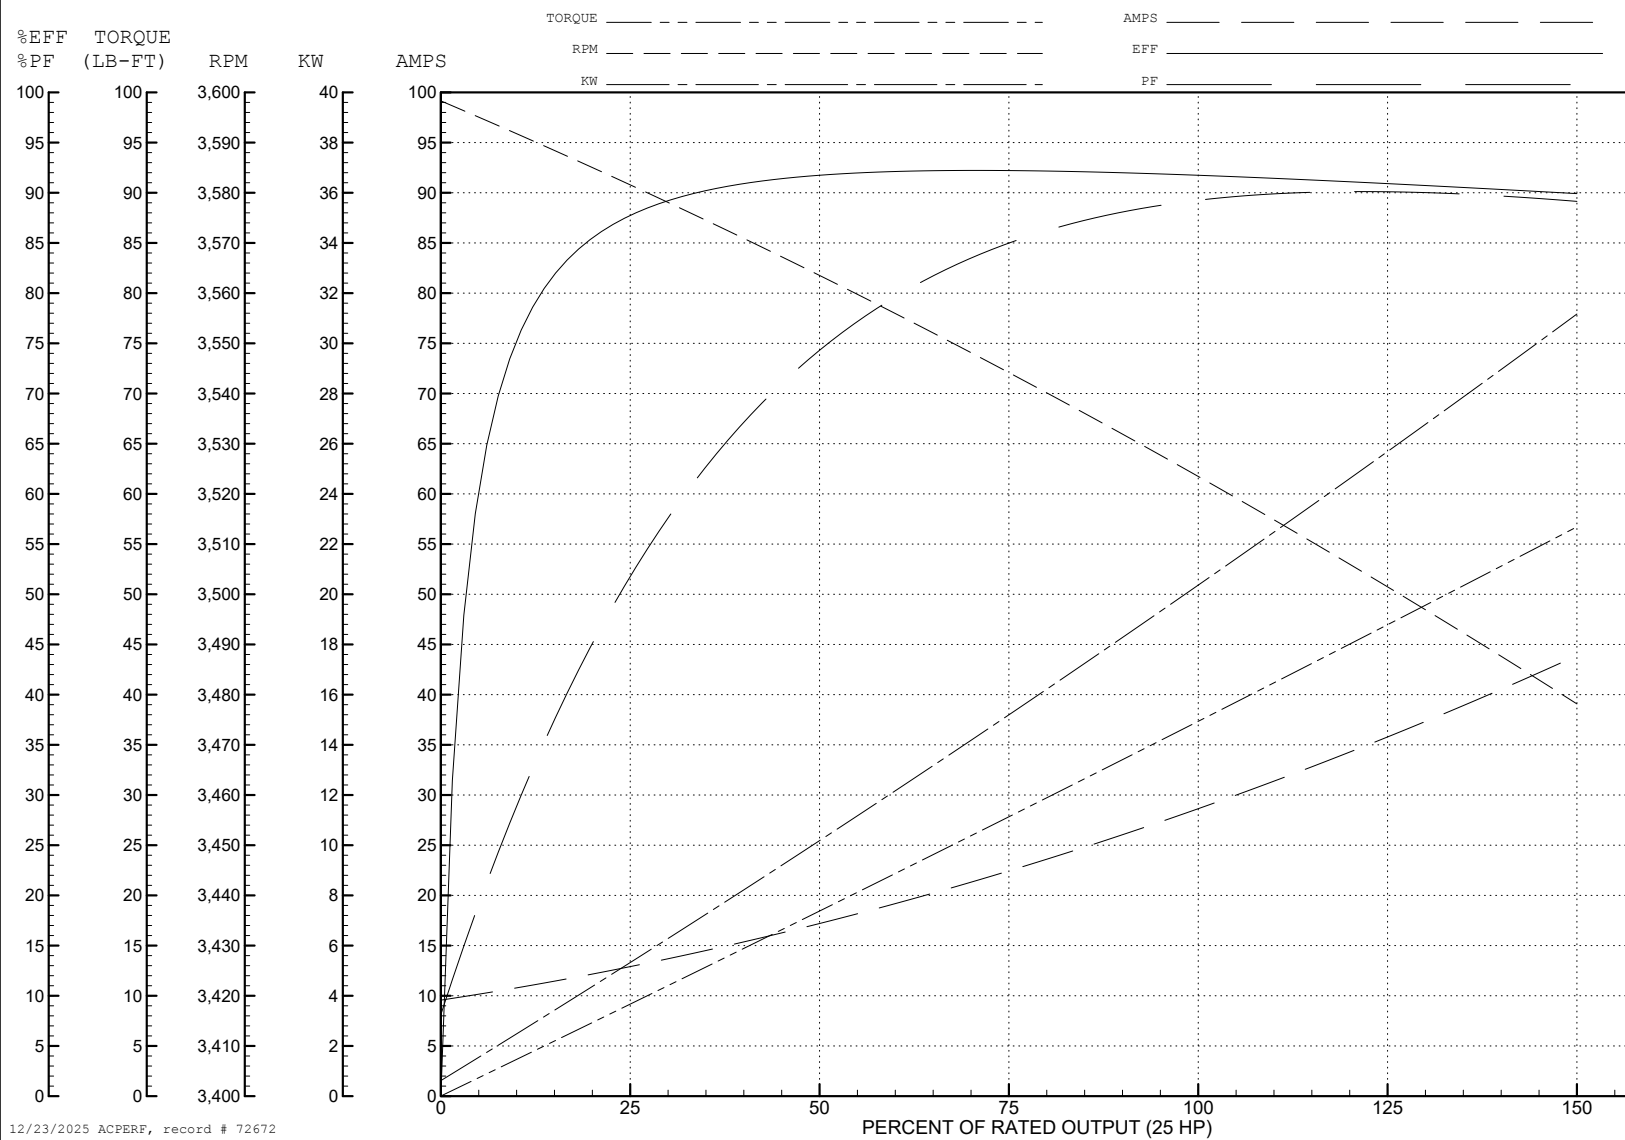
ABB Motors and Mechanical Inc.

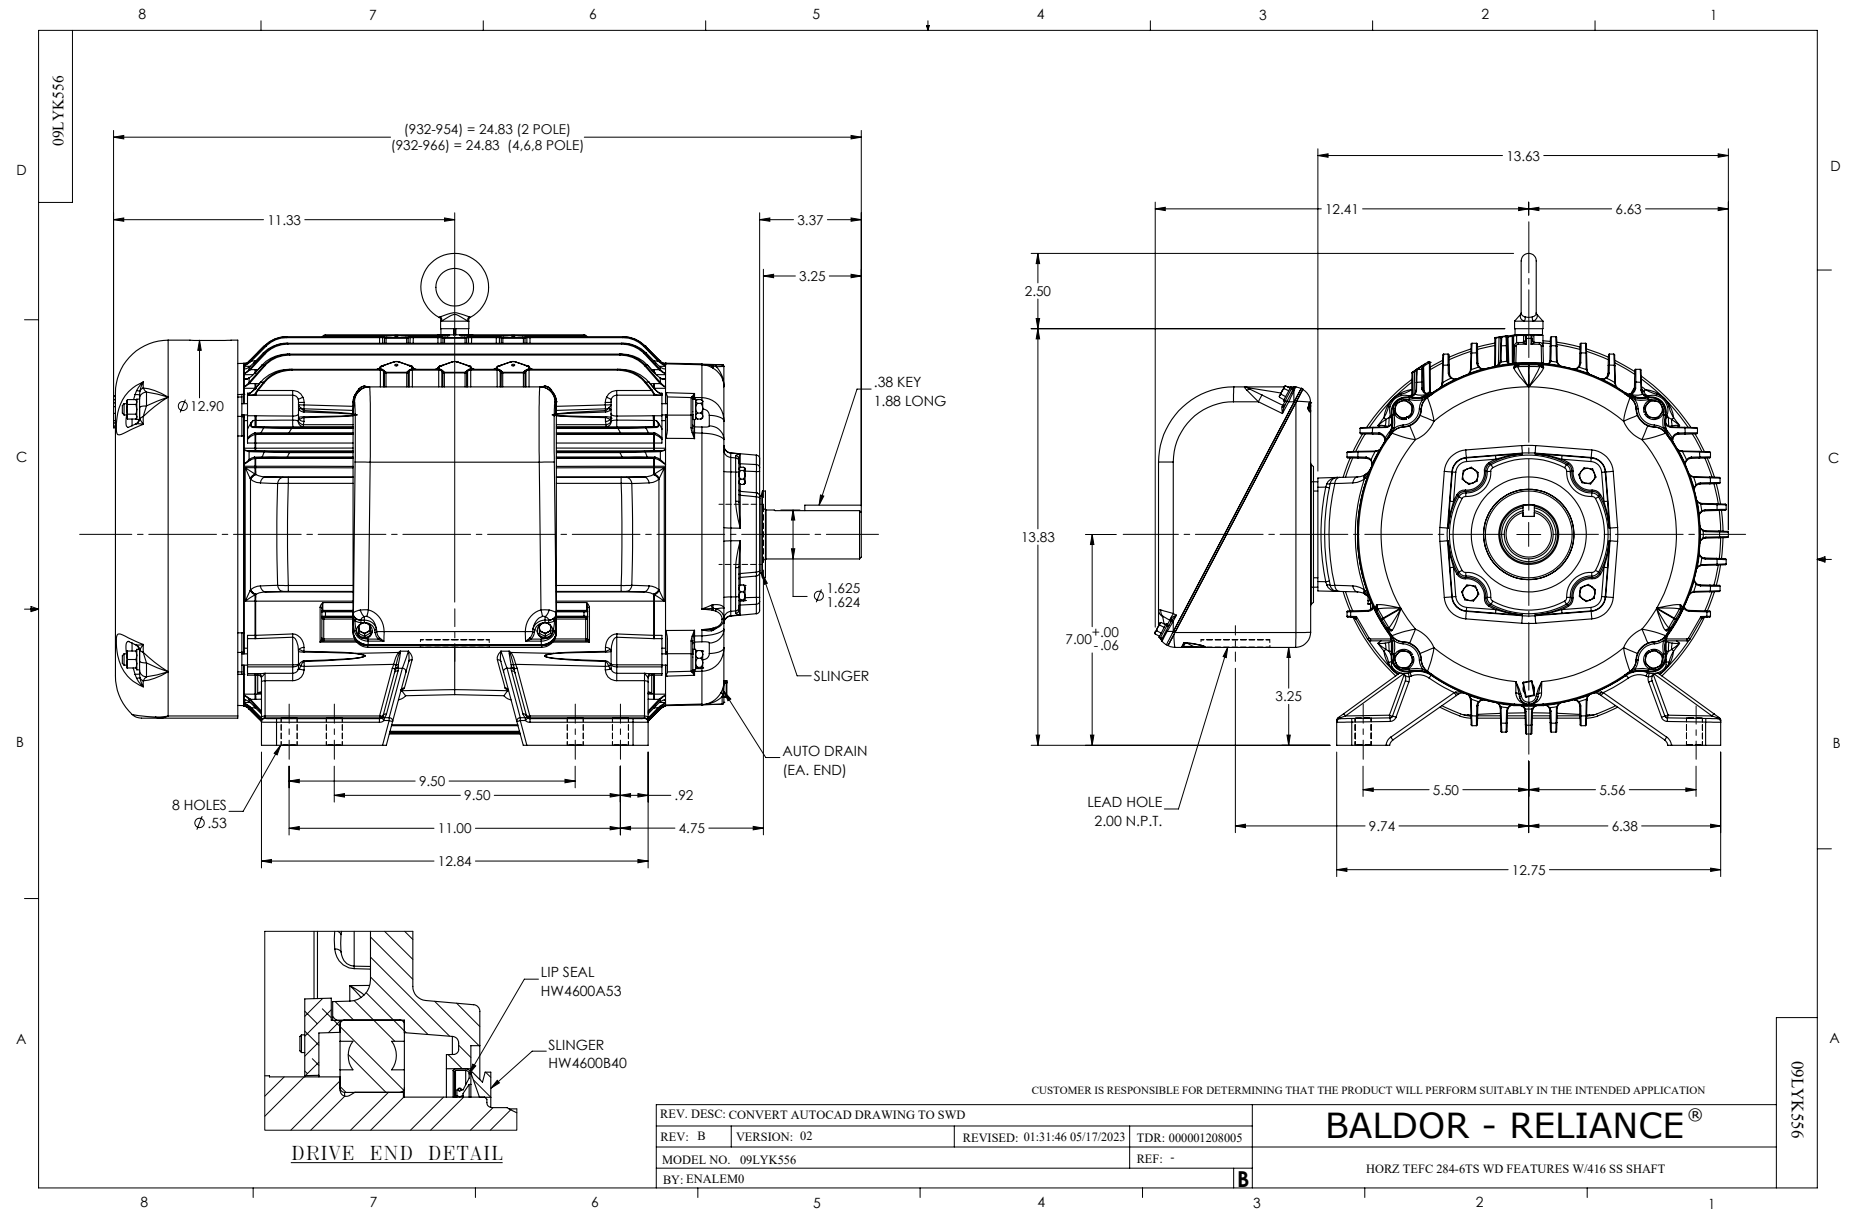
WINDING # 09WGT577

Typical performance - not guaranteed values.

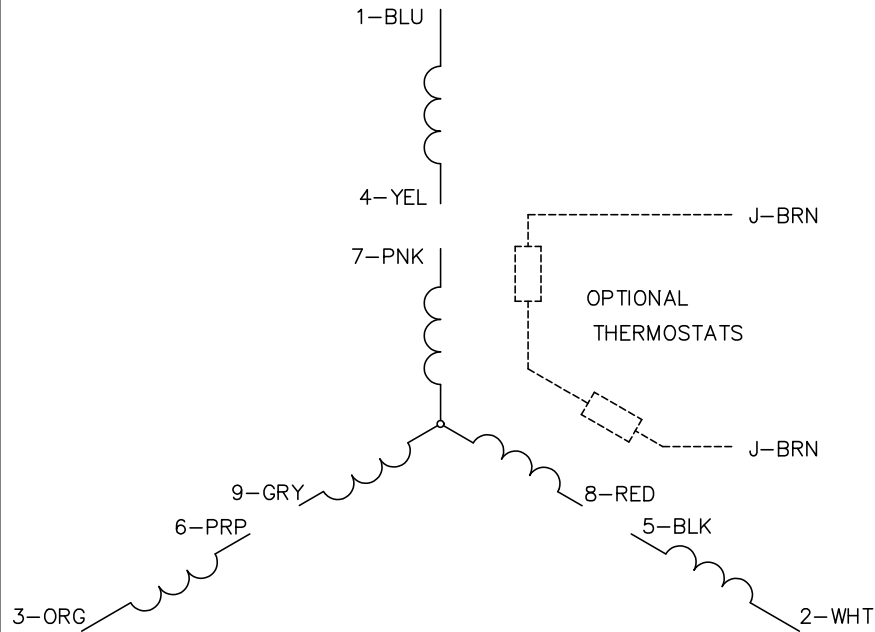

25 HP 3 PH 60 HZ 3520 RPM 460 V 0944M

TORQUES (LB-FT): PO=153 PU=58.5 LR=75 LRA=223






CD0005

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: E

BY: JLP

REVISED: 01/19/99 10:15

TDR: 0171435

S00000

FILE: AAA00005140

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005