



Customer information packet

EWDM4403T

60HP, 1185RPM, 3PH, 60HZ, 404T, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	404T
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	60.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	CSA EEV CCSA US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	139.000 A @ 230.0 V 69.300 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.5 %
Enclosure Modification	Severe Duty Features
Feedback Device	NO FEEDBACK
Heater Indicator	No Heater
High Voltage Full Load Amps	69.3 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	IP55
KVA Code	G

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	A40WG0844
Layout	617429-533
Eff. date	10-22-2021
CD Diagram	416820-002
Poles	06
Leads	3#4,6#6
Proprietary	False
Created date	09-11-2019

Motor Lead Quantity/Wire Size	3 @ 4 AWG
Motor Standards	NEMA
Motor Type	A40064M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	38.19 IN
Power Factor	86
Product Family	Washdown Features
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.15
Shaft Diameter	2.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	1185 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None


Nameplate

NP2496L	
MOBIL POLYREX EM	

NP2428L

SPEC NO.	A40-7111-0844			CAT.NO.	EWDM4403T					FRAME	404T	
HP	60	VOLTS	230/460		PHASE	3	DESIGN	B	TYPE	P		
RPM	1185	AMPS	139/69.3		HZ	60	AMB	40	SF	1.15		
DRIVE END BEARING	80BC03JPP30A		DUTY	CONT	INSUL.CLASS			F				
OPP D.E. BEARING	80BC03JPP30A		ENCL	TEFC	CODE	G						
SER.NO.				POWER FACTOR	86	NEMA-NOM-EFFICIENCY					94.5	
						MAX CORR KVAR	12.5	GUARANTEED EFFICIENCY			93.6	
	IP55					NEMA NOM/CSA QUOTED EFF						
	4:1CT AND 4:1VT ON VPWM INVERT					ER, 1.00SF			MOTOR WEIGHT			

REL. S.O.	FRAME	HP	TYPE	PHASE/ HERTZ	RPM	VOLTS
	404T	60	P	3/60	1185	230/460
AMPS	DUTY	AMB °C/ INSUL.	S.F.	NEMA DESIGN	CODE LETTER	ENCL.
139/69.3	CONT	40/F	1.15	B	G	TEFC
E/S	ROTOR		TEST S.O.	TEST DATE	STATOR RES. @25 °C OHMS (BETWEEN LINES)	
595762	418142-71EE		---	---	.0274/.109	
PERFORMANCE						
LOAD	HP	AMPERES	RPM	POWER % FACTOR	EFFICIENCY %	
NO LOAD	0	19.9	1200	6.18	0	
1/4	15.0	26.0	1197	59.4	91.2	
2/4	30.0	37.9	1194	78.7	94.2	
3/4	45.0	52.7	1191	84.3	94.7	
4/4	60.0	69.3	1187	85.8	94.5	
5/4	75.0	86.7	1184	86.2	94.0	
SPEED TORQUE						
	RPM	TORQUE % FULL LOAD	TORQUE LB.-FT.	AMPERES		
LOCKED ROTOR	0	159	421	425		
PULL UP	240	145	384	411		
BREAKDOWN	1133	245	651	243		
FULL LOAD	1187	100	265	69.3		
AMPERES SHOWN FOR 460. VOLT CONNECTION. IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE						
REMARKS: TYPICAL DATA XE MOTOR-NEMA NOM. EFF. 94.5 % GUARANTEED MIN. EFF. 93.6%						
BALDOR			DR. BY J. P. TSAO CR. BY J. P. TSAO APP. BY E.J. CHRISTIAN DATE 10/18/17			
A MEMBER OF THE ABB GROUP			A-C MOTOR PERFORMANCE DATA A40WG0844-R015 ISSUE DATE 12/01/20			

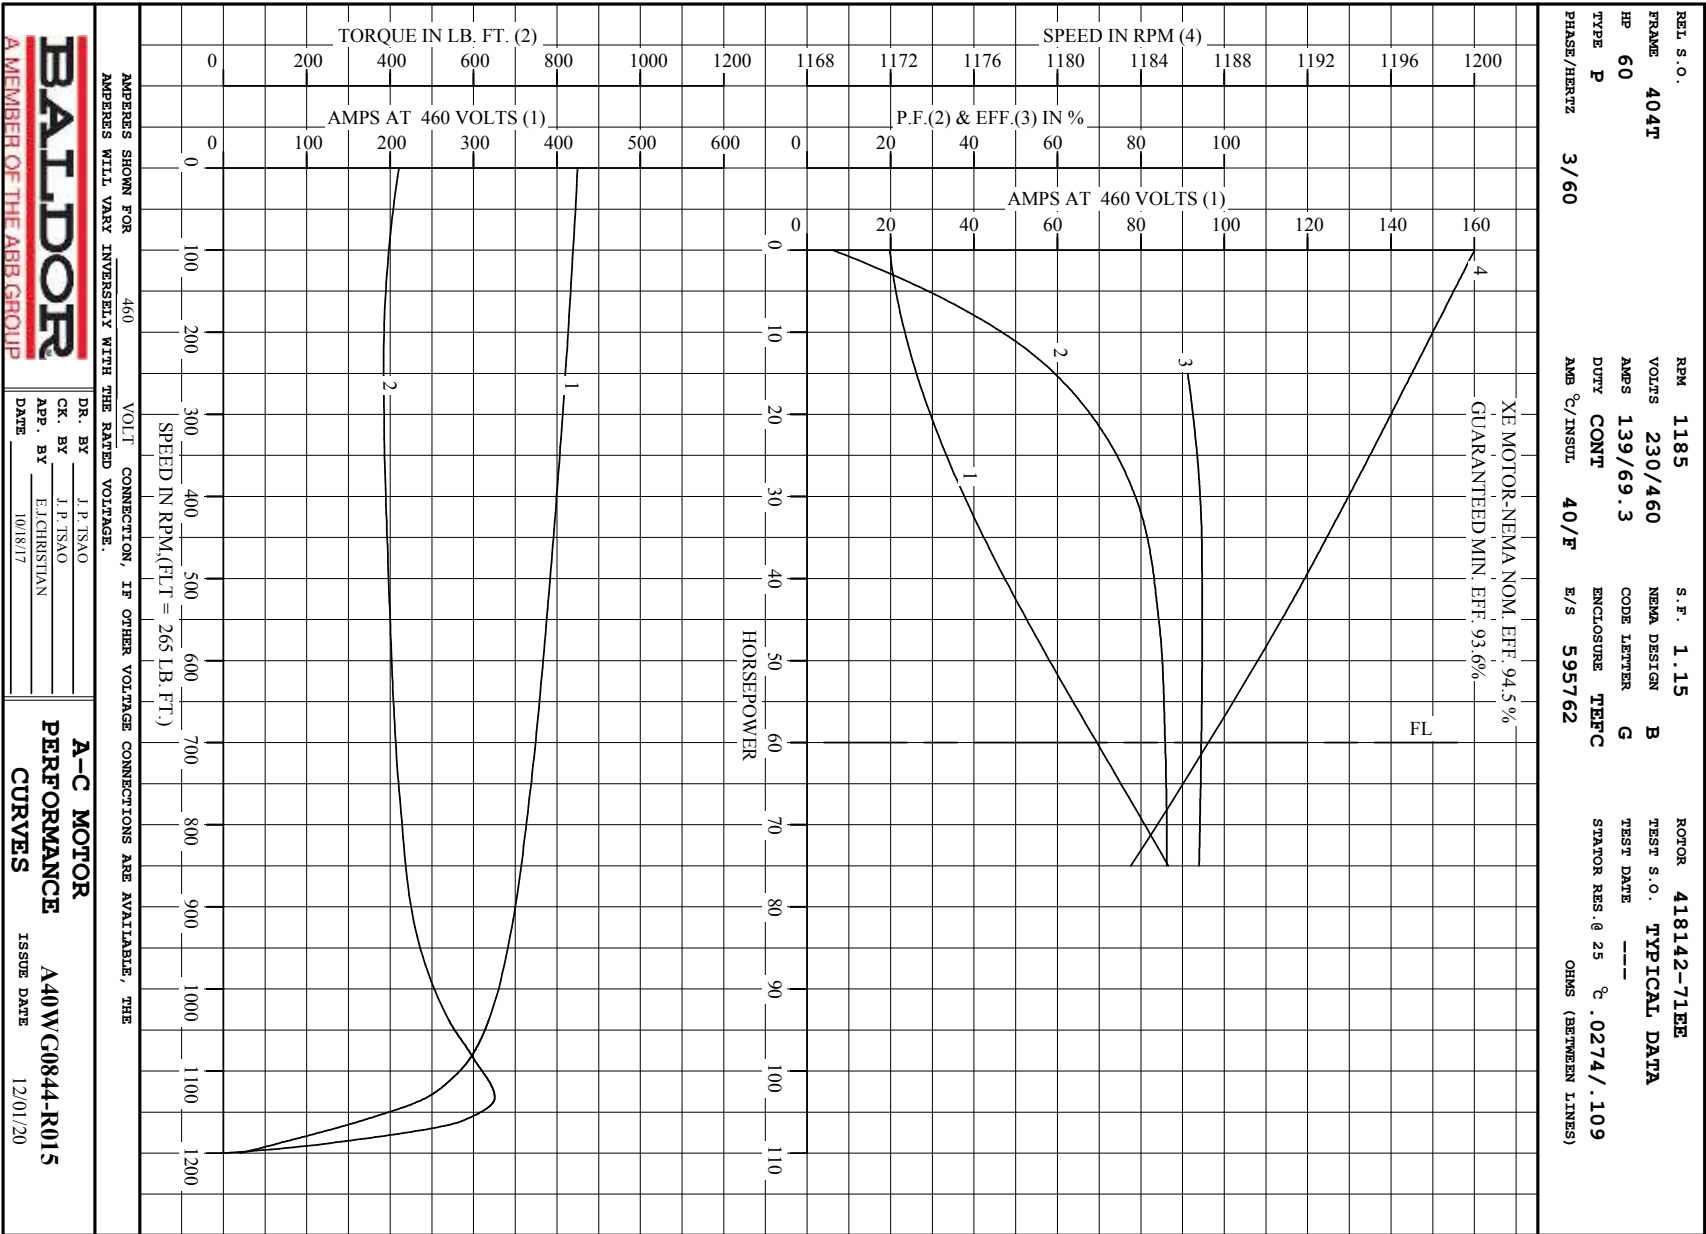

REL. S.O. 404T

HP 60

TYPE P

PHASE/HERTZ 3/60

RPM 1185

VOLTS 230/460

AMPS 139/69.3

DUTY CONT

AMB °C/INSUL 40/F

E/S 595762

S.F. 1.15

NEMA DESIGN B

CODE LETTER G

ENCLOSURE TEFC

STATOR RES @ 25 °C. 0274/.109

OHMS (BETWEEN LINES)

ROTOR 418142-71EE

TEST S.O. TYPICAL DATA

TEST DATE ---

10.00

9

8

7

6

5

4

3

2

1.00

9

8

7

6

5

4

3

2

1

0

TIME IN SEC.

100

200

300

400

500

600

700

OVERLOAD

ACCELERATION

LOCKED-ROTOR

LOCKED-ROTOR, 40 C

MOTOR INITIAL TEMPERATURE:
92 C FOR OVERLOAD AND ACC
92 C FOR LOCKED-ROTOR

% FULL LOAD CURRENT

REMARKS:

THermal LIMIT CURVE

XE MOTOR-NEMA NOM. EFF. 94.5 %

GUARANTEED MIN. EFF. 93.6%

AMPERES SHOWN FOR 460

VOLT CONNECTION, IF OTHER VOLTAGE CONNECTIONS ARE AVAILABLE, THE

AMPERES WILL VARY INVERSELY WITH THE RATED VOLTAGE.

BALDOR

A MEMBER OF THE ABB GROUP

DR. BY J.P. TSAO

CK. BY J.P. TSAO

APP. BY E.J. CHRISTIAN

DATE 10/8/17

A-C MOTOR


PERFORMANCE CURVES


A40WG0844-R015

ISSUE DATE 12/01/20

Printed on 12/1/20 13:06 @ bengap01.ba



Page 8 of 11

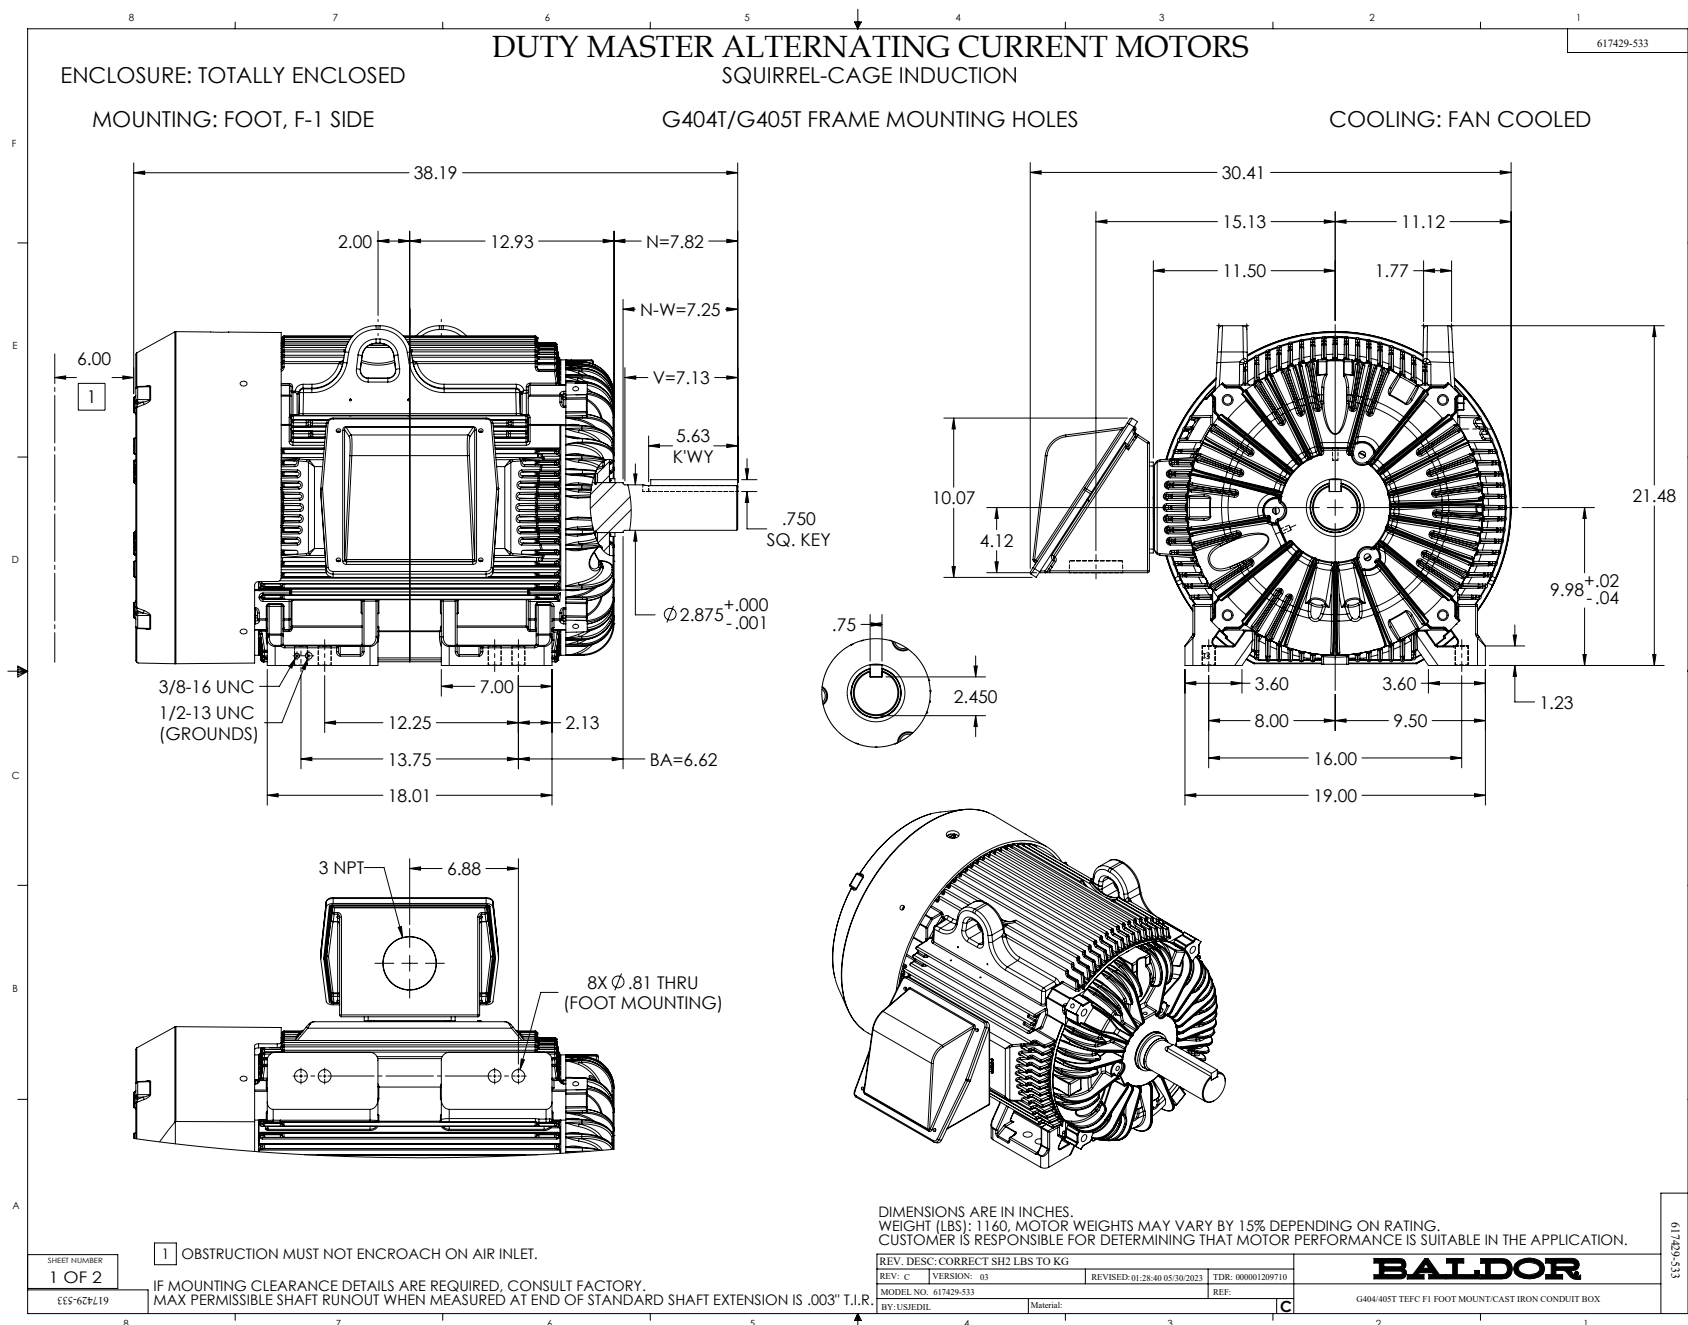

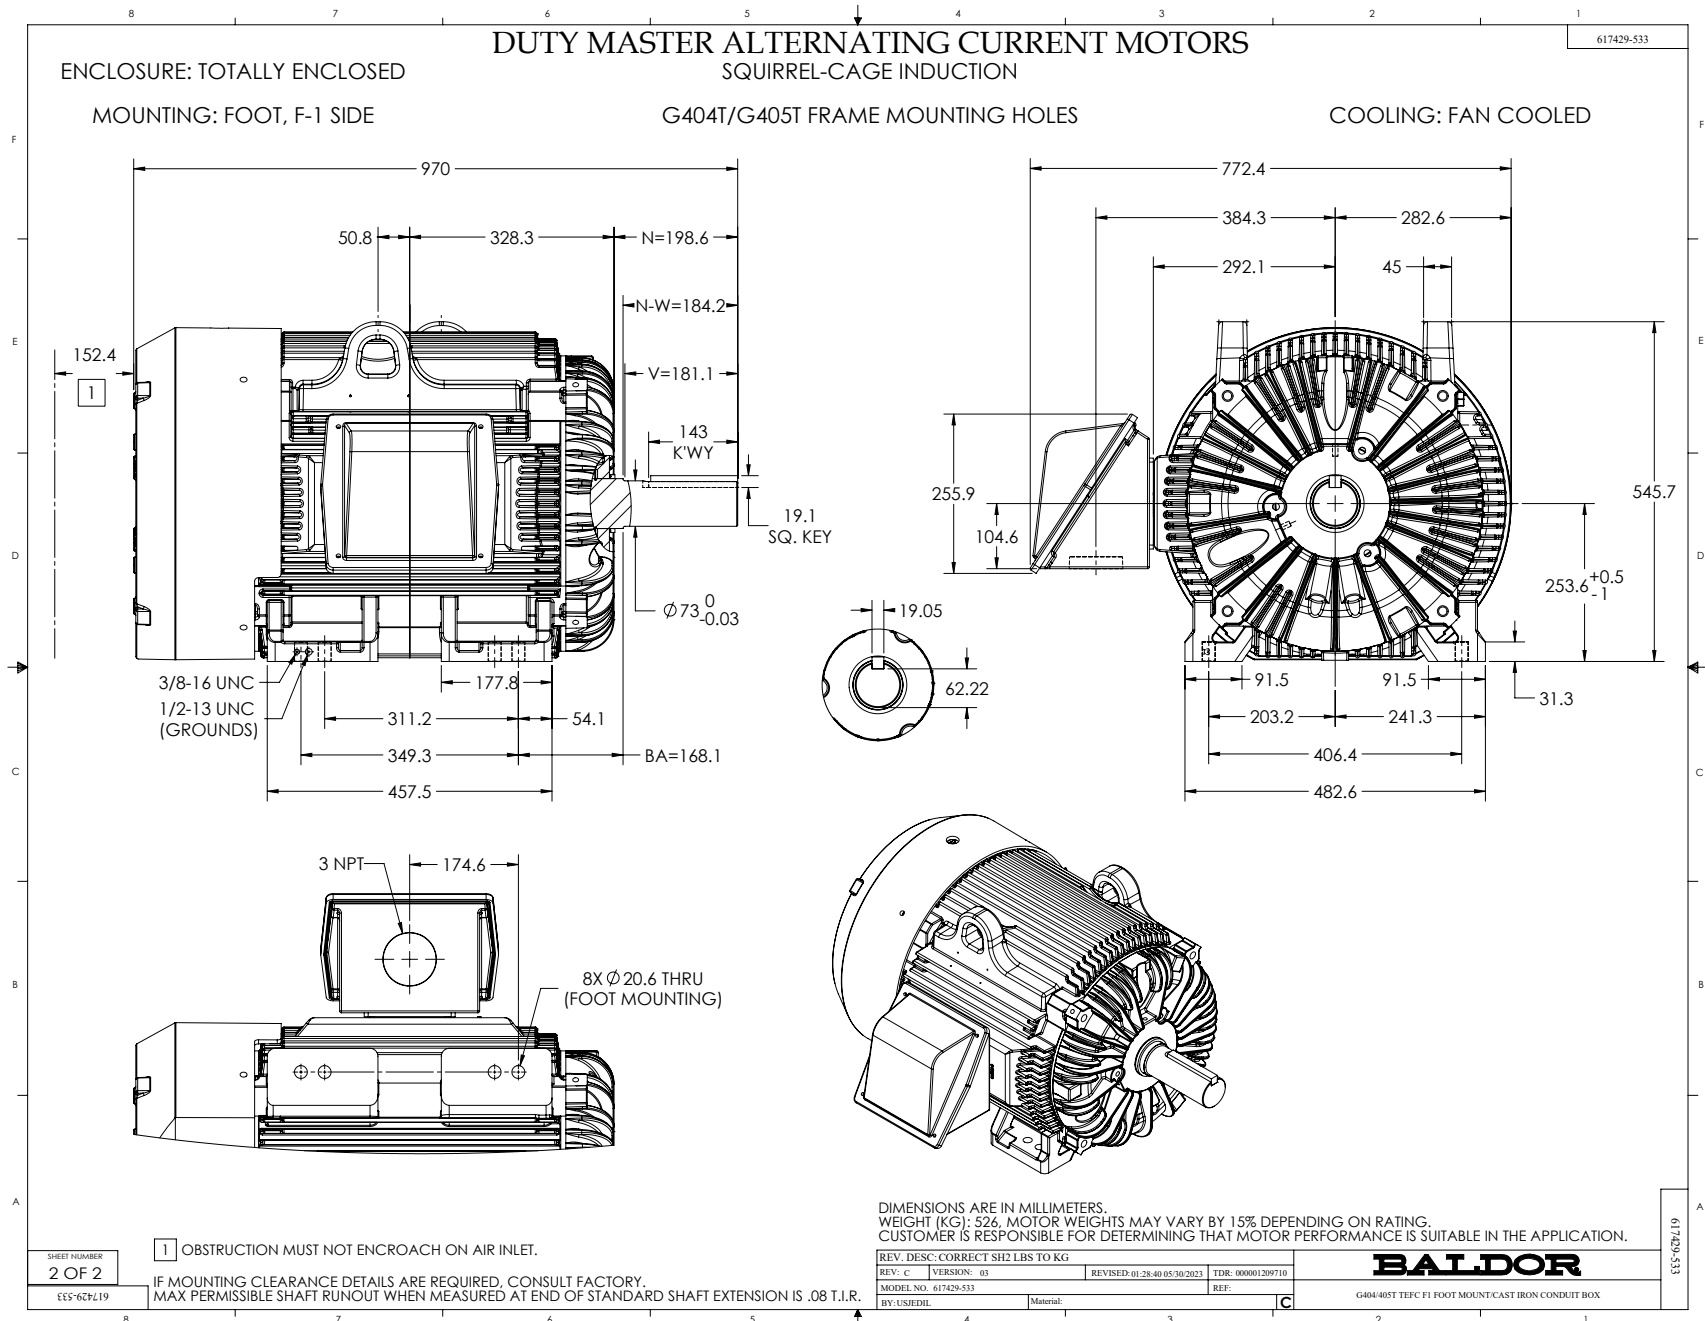

416820-002

A-C MOTOR
CONNECTION DIAGRAM
STANDARD 9 LEAD DELTA-CONNECTED

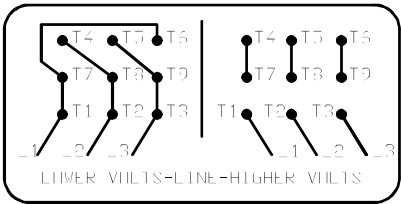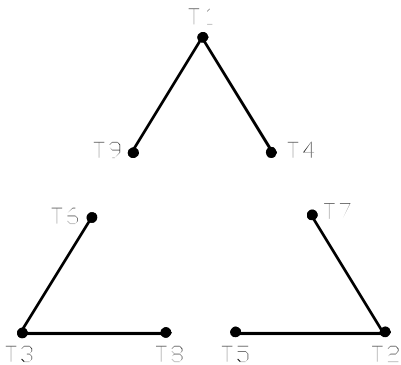

LOWER VOLTS-LINE-HIGHER VOLTS

(N.P. 1575-B)

REV. DESC: FONT CHANGE FOR PDF SEARCHABLE		
REV. LTR: A	VERSION: 01	TDR: 000001009382
FILE: \MGA\00000\661	REVISED: 02:46:19 02/13/2020	BY: MGHMTT
MTL: —		

BALDOR - RELIANCE®

CONN DIAG — STANDARD 9 LEAD, DELTA-CONNECTED
SH 1 of 1

416820-002