



Customer information packet

FPM2555TS

100//75HP, 1775//1475RPM, 3PH, 60//50HZ, 404

Specifications

Enclosure	OPSB
Frame	404TS
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Motor Letter Type	Three Phase
Output @ Frequency	100.000 HP @ 60 HZ 75.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 190.0 V @ 50 HZ 460.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	CSA EEV UL
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	252.000 A @ 208.0 V 234.000 A @ 230.0 V 214.000 A @ 190.0 V 117.000 A @ 460.0 V 107.000 A @ 380.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	94.1 %
Electrically Isolated Bearing	Not Electrically Isolated

Part detail

Revision	M
Type	AC
Mech. spec.	44E020
Base	
Status	PRD/A
Elec. spec.	44WGW056
Layout	44LYE020
Eff. date	10-31-2024
CD Diagram	CD0104
Poles	04
Leads	12#6
Proprietary	False
Created date	09-17-2015

Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	107.0 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	F
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	12 @ 6 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	4462M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	31.85 IN
Power Factor	85
Product Family	Fire Pump Motor
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	2.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1475 rpm 1775 rpm
Speed Code	Single Speed
Starting Method	Wye Start - Delta Run

Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP3454L															
CAT.NO.	FPM2555TS				CUST P/N							I.P.	23		
SPEC.	44E020W056H3				SER.NO.							FRAME	404TS		
HZ	60	HP	100		RPM	1775		HZ	50		HP	75		RPM	1475
VOLTS	230/460			CODE	F			VOLTS	190/380				CODE	G	
AMPS	234/117			DES	B			AMPS	214/107				DES	B	
EFF	94.1	SER.F.	1.15		PF	85		EFF	93.6		SER.F.	1.15		PF	84
RATING	40C AMB-CONT				DE BRG		6313			GREASE		POLYREX EM			
BLANK					ODE BRG		6312			MTR. WT.		597			
					CLASS		F		PH		3				
					ENCL		OPSB		CC		010A				
HTR-VOLTS					HTR-AMPS				HTR-WATTS						

AC Induction Motor Performance Data

Record # 52880

Typical performance - not guaranteed values

Winding: 44WGW056-R002			Type: 4462M		Enclosure: OPSB			
Nameplate Data				460 V, 60 Hz: High Voltage Connection				
Rated Output (HP)		100//75		Full Load Torque		295 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		234/117//214/107		Breakdown Torque		776 LB-FT		
R.P.M.		1775//1475		Pull-up Torque		310 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		440 LB-FT	
NEMA Design Code		B		KVA Code	F	Starting Current		680 A
Service Factor (S.F.)		1.15		No-load Current		43.2 A		
NEMA Nom. Eff.		94.1	Power Factor		85	Line-line Res. @ 25°C		0.0628 Ω
Rating - Duty		40C		AMB-CONT		Temp. Rise @ Rated Load		53°C
S.F. Amps						Temp. Rise @ S.F. Load		70°C
						Locked-rotor Power Factor		26
						Rotor inertia		11.7 LB-FT2

Load Characteristics 460 V, 60 Hz, 100 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	51	73	82	85	86	85	86
Efficiency	90.2	93.6	94.3	94.1	93.6	92.6	93.8
Speed	1794	1789	1783	1777	1771	1763	1773
Line amperes	50.7	68.5	91.4	117	145.9	177.8	134.3


ABB Motors and Mechanical Inc.

WINDING # 44WG056

Typical performance - not guaranteed values.

100 HP 3 PH 60 HZ 1777 RPM 460 V 4462M

TORQUES (LB-FT): PO=776 PU=310 LR=440 LRA=680

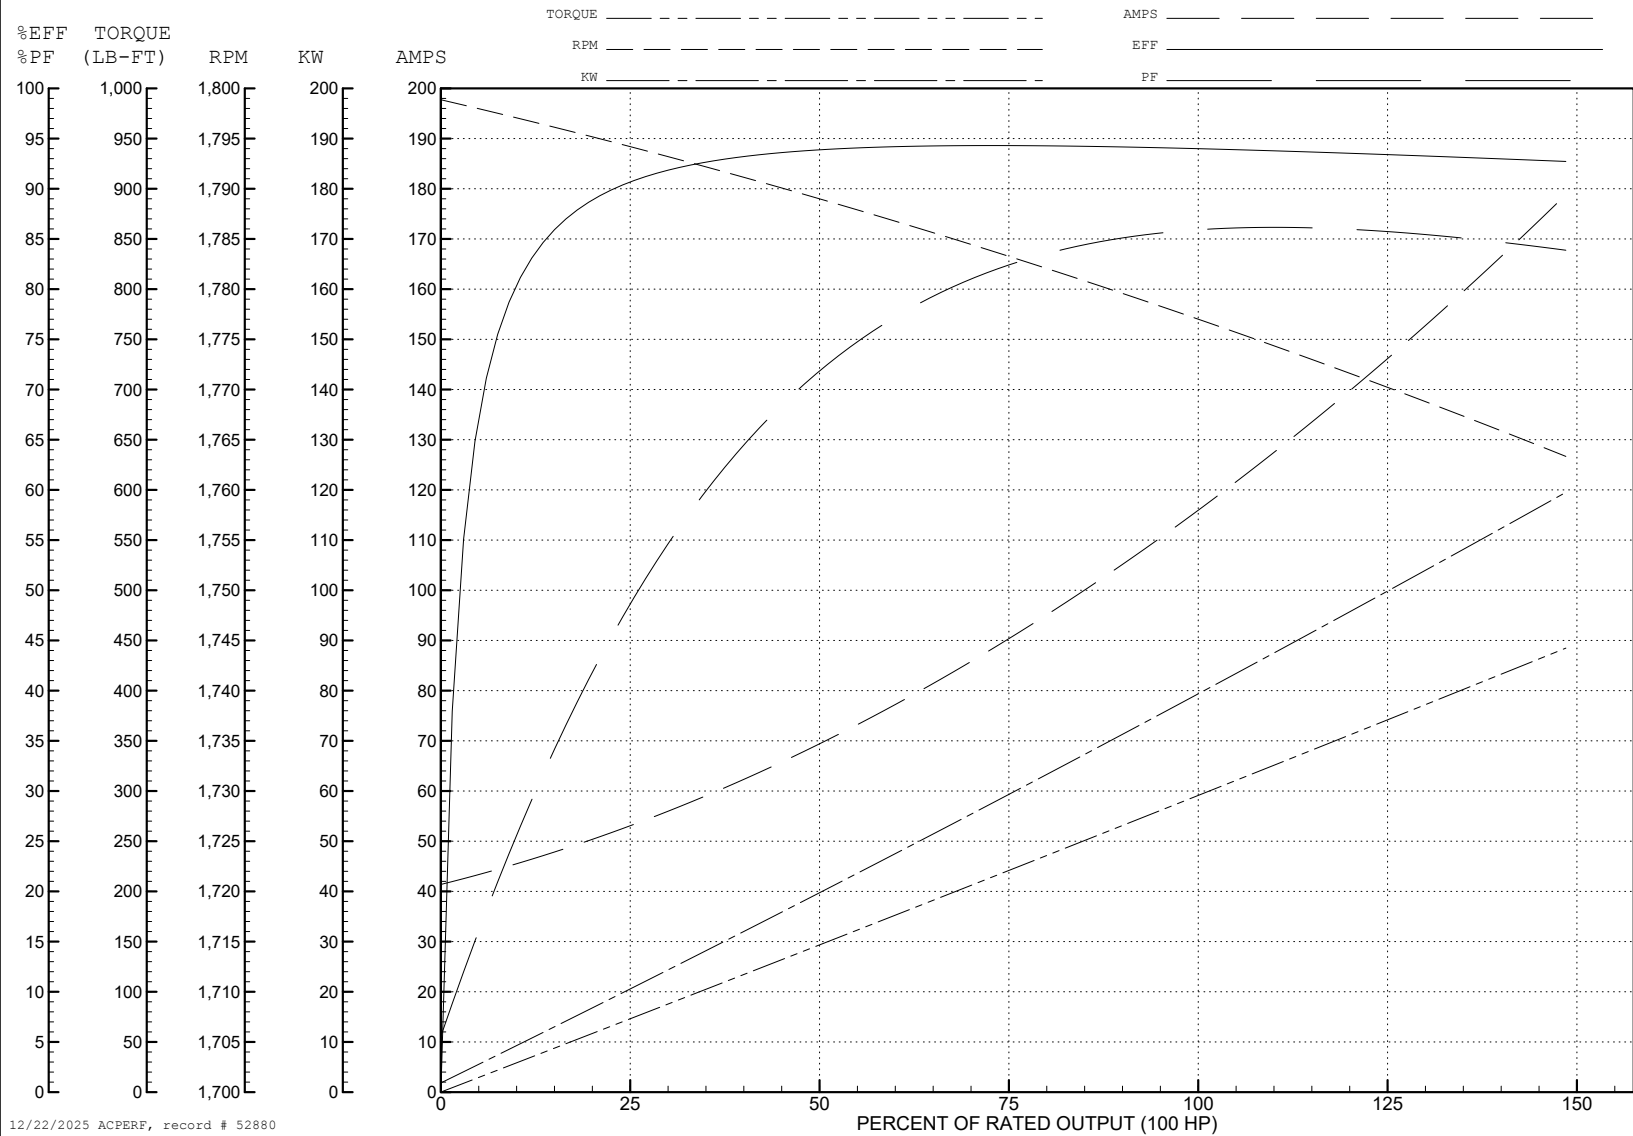

AC Induction Motor Performance Data

Record # 52881

Typical performance - not guaranteed values

Winding: 44WGW056-R002			Type: 4462M		Enclosure: OPSB			
Nameplate Data				380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		100//75		Full Load Torque		266 LB-FT		
Volts		230/460//190/380		Start Configuration		direct on line		
Full Load Amps		234/117//214/107		Breakdown Torque		752 LB-FT		
R.P.M.		1775//1475		Pull-up Torque		327 LB-FT		
Hz		60//50	Phase	3	Locked-rotor Torque		464 LB-FT	
NEMA Design Code		B		KVA Code	F	Starting Current		667 A
Service Factor (S.F.)		1.15		No-load Current		42.3 A		
NEMA Nom. Eff.		94.1	Power Factor		85	Line-line Res. @ 25°C		0.0622 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		46°C		
S.F. Amps				Temp. Rise @ S.F. Load		56°C		
				Locked-rotor Power Factor		28.6		
				Rotor inertia		11.7 LB-FT2		

Load Characteristics 380 V, 50 Hz, 75 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	49	71	80	84	85	84	85
Efficiency	90.2	93.6	94.1	94	93.2	92.3	93.5
Speed	1495	1490	1485	1479	1474	1467	1476
Line amperes	48.6	64	84.3	107	133	162	123

ABB Motors and Mechanical Inc.

WINDING # 44WG056

Typical performance - not guaranteed values.

75 HP 3 PH 50 HZ 1479 RPM 380 V 4462M

TORQUES (LB-FT): PO=752 PU=327 LR=464 LRA=667

