



Customer information packet

GNEM3554T-G

1.5/1.1KWHP, 1755//1445RPM, 3PH, 60//50HZ, 1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	143T
Frame Material	Steel
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ 1.500 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	190.0 V @ 50 HZ 208.0 V @ 60 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ 460.0 V @ 60 HZ
Agency Approvals	CE WEEE UKCA CURUSEEV IE3 NEMA PREMIUM
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.400 A @ 190.0 V 4.600 A @ 230.0 V 4.600 A @ 208.0 V 2.700 A @ 380.0 V

Part detail

Revision	G
Type	AC
Mech. spec.	35Z063
Base	
Status	PRD/A
Elec. spec.	35WGZ801
Layout	35LYZ063
Eff. date	06-25-2025
CD Diagram	CD0005
Poles	04
Leads	9#18 Y
Proprietary	False
Created date	08-16-2023

	2.300 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.3 a
Insulation Class	F
Inverter Code	Inverter Duty
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Quantity/Wire Size	9 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	13.28 IN
Power Factor	80
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger

Speed	1445 rpm
	1755 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4304L									
CAT.NO.	GNEM3554T-G								
SPEC.	35Z063Z801G1								
HP	1.5HP//1.1KW						PH	3	
VOLTS	208-230/460//190/380								
AMPS	4.6/2.3//5.4/2.7								
R.P.M. (1/MIN)	1755//1445						WT.	19KG	KG
FRAME	145T	HZ		60//50			I.P.	44	
SER.F.	1.15	CODE	K	DES.	B	CLASS	H		
NOM.EFF.	86.5//85.3		% (100%)						
P.F.	80	IC411, 10:1 VT							
RATING	40C AMB-S1 CONT				CC	010A			
DE	6205		ODE	6203					
ENCL	TEFC	SN							
	SFA 5.2-5/2.5//6/3								
	IE3-50HZ-85.5(75%),83.8(50%)								
	IE3-60HZ-86.3(75%),84.1(50%)								

AC Induction Motor Performance Data

Record # 102725

Preliminary Data Sheet

Winding: 35WGZ801-R042			Type: 3528M		Enclosure: TEFC			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		1.5HP//1.1KW	Full Load Torque		4.51 LB-FT			
Volts		208-230/460//190/380	Start Configuration		direct on line			
Full Load Amps		4.6/2.3//5.4/2.7	Breakdown Torque		21.49 LB-FT			
R.P.M.		1755//1445	Pull-up Torque		14.77 LB-FT			
Hz		60//50	Phase		3	Locked-rotor Torque	18.15 LB-FT	
NEMA Design Code		B	KVA Code		K	Starting Current	20.62 A	
Service Factor (S.F.)		1.15	No-load Current		1.45 A			
NEMA Nom. Eff.		86.5	Power Factor		80	Line-line Res. @ 25°C	9.85 Ω	
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load			41°C
S.F. Amps		5.2-5/2.5//6/3	Temp. Rise @ S.F. Load		48°C			
			Locked-rotor Power Factor		60.6			
			Rotor inertia		0.188 lb-ft²			

Load Characteristics 460 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	32	50	63	72	78	82	76
Efficiency	75.2	84.1	86.3	86.7	86.2	85	86.4
Speed	1788	1777	1766	1754	1741	1727	1746
Line amperes	1.52	1.69	1.95	2.26	2.63	3.05	2.48


ABB Motors and Mechanical Inc.

WINDING # 35WGZ801

Typical performance - not guaranteed values.

1.5 HP 3 PH 60 HZ 1754 RPM 460 V 3528M

TORQUES (LB-FT): PO=21.49 PU=14.77 LR=18.15 LRA=20.62

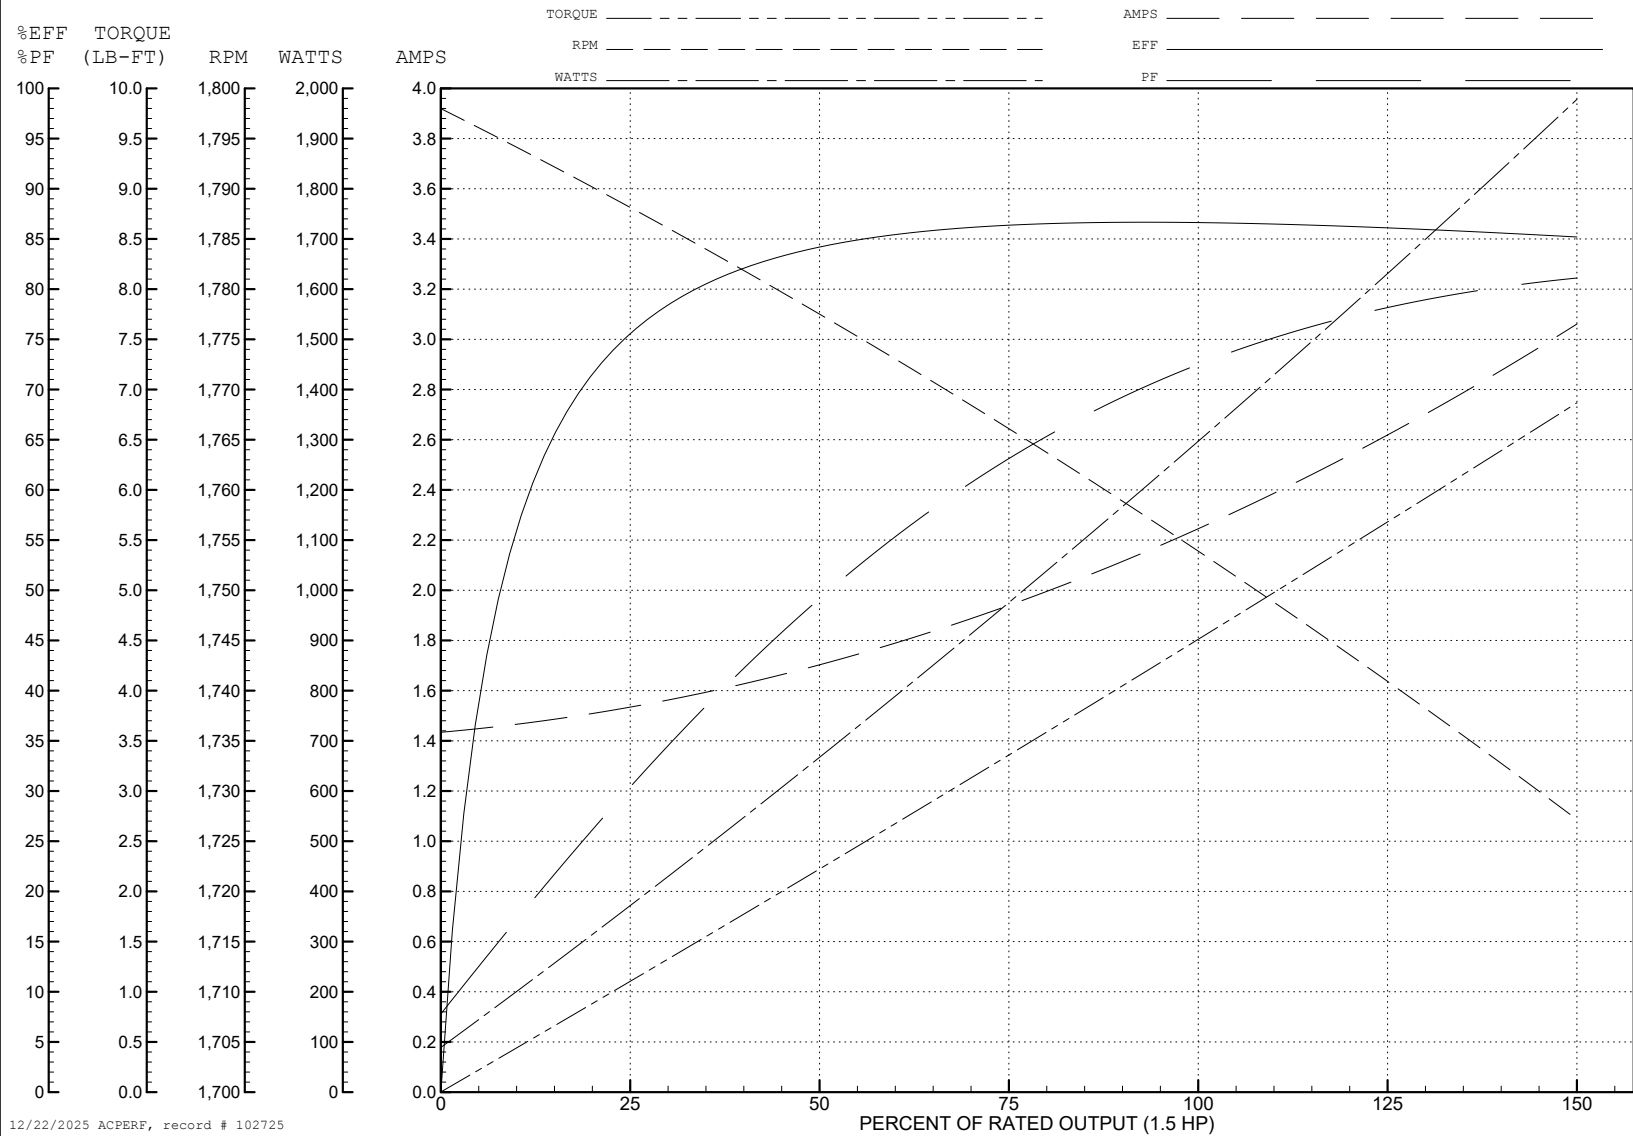

AC Induction Motor Performance Data

Record # 102726

Typical performance - not guaranteed values

Winding: 35WGZ801-R042			Type: 3528M		Enclosure: TEFC		
Nameplate Data			380 V, 50 Hz: High Voltage Connection				
Rated Output (HP)		1.5HP//1.1KW	Full Load Torque		5.45 LB-FT		
Volts		208-230/460//190/380	Start Configuration		direct on line		
Full Load Amps		4.6/2.3//5.4/2.7	Breakdown Torque		20.8 LB-FT		
R.P.M.		1755//1445	Pull-up Torque		16.9 LB-FT		
Hz	60//50	Phase	3	Locked-rotor Torque		18.1 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		19 A
Service Factor (S.F.)			1.15	No-load Current		1.64 A	
NEMA Nom. Eff.		86.5	Power Factor	80	Line-line Res. @ 25°C		9.85 Ω
Rating - Duty			40C AMB-CONT	Temp. Rise @ Rated Load		57°C	
S.F. Amps			5.2-5/2.5//6/3	Temp. Rise @ S.F. Load		70°C	
				Locked-rotor Power Factor		66.2	
				Rotor inertia		0.188 lb-ft²	

Load Characteristics 380 V, 50 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	33	53	67	75	81	84	79
Efficiency	76.1	83.8	85.5	85.1	83.8	81.8	84.3
Speed	1488	1475	1460	1445	1428	1409	1435
Line amperes	1.71	1.92	2.24	2.66	3.14	3.71	2.95

ABB Motors and Mechanical Inc.

WINDING # 35WGZ801

Typical performance - not guaranteed values.

1.5 HP 3 PH 50 HZ 1445 RPM 380 V 3528M

TORQUES (LB-FT): PO=20.8 PU=16.9 LR=18.1 LRA=19

