



Customer information packet

IDDRPM322504R1

250HP, 1750, 460V, RL3203, DPFV, F1

Specifications

Enclosure	DPFV
Frame	RL3203Z
Frame Material	Exposed Laminations
Frequency	60.00 Hz
Output @ Frequency	250.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	291.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Frame Prefix	RL
Heater Indicator	No Heater
High Voltage Full Load Amps	291.0 a
Insulation Class	H
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	46.10 IN
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	2.874 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1770 rpm
Starting Method	Full Voltage
Thermal Device - Bearing	None

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	L9455A
Layout	619691-001
Eff. date	12-18-2025
CD Diagram	422927-001
Poles	04
Leads	
Proprietary	False
Created date	02-01-2023

Thermal Device - Winding

Normally Closed Thermostat

Nameplate

000613006MY						
	DUTY	HP	RPM	AMPS	VOLTS	HZ
	CONT	250	1770	291	460	60
	CONT	250	2212	281	460	75
	CONT	250	2948	284	460	100
CAT.NO.	IDDRPM322504R1		SPEC. NO.		R32-A000-0405	
SER.NO			FR	RL3203Z	INSUL	H
PH.	3	MAX SAFE SPEED		4000	AMB.	40
DESIGN NO.	L9455A		TYPE		ENCL.	DPG-FV
S.F.	1.00		D.E. BRG.	85BC02J30X		
ENCL MOD			O.D.E. BRG.	6313/C3VL0241		

S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)		
FRAME	RL3203	AMPS	289	MAX SAFE SPEED	4000			
HP	250	DUTY	CONT	IM (AMPS)	89.9	R1	.0179	X1 .104
BASE SPEED	1768	S.F.	1.0	P.F. @NL / FL	.042/.883	R2	.0116	X2 .100
PHASE/HZ	3/60	AMB.°C / INSUL	52/H	WK² (Lb-Ft²)	21.3	X3 .302		

RATED FULL LOAD DATA

	RPM	HP	TORQUE LB-FT	FUND VOLTS	FREQ-HZ	AMPS
BASE SPEED	1769	250	742	460	60	289
MAX SPEED	2943	250	446	460	100	291
MIN SPEED	0	0	742	15.3	1.04	289

LOAD PERFORMANCE AT BASE SPEED

	RPM	HP	TORQUE LB-FT	FUND VOLTS	FREQ-HZ	AMPS
NO LOAD	1800	0	0	460	60	88.1
1/4	1793	62.5	183	460	60	113
1/2	1785	125	368	460	60	162
3/4	1777	187	554	460	60	222
FULL LOAD	1769	250	742	460	60	289
0/L	1726	488	1485	460	60	599


REMARKS:
TYPICAL DATA

	DRAWN BY: RGARCIA CHECKED BY: RGARCIA APPROVED BY: JMARTIN DATE: 01-23-23	AC MOTOR PERFORMANCE DATA	L9455A ISSUE DATE 01-23-23
---	--	---------------------------------	-------------------------------

USRIGAR4

Printed on 05/11/2023 11:06 AM

USRIGAR4

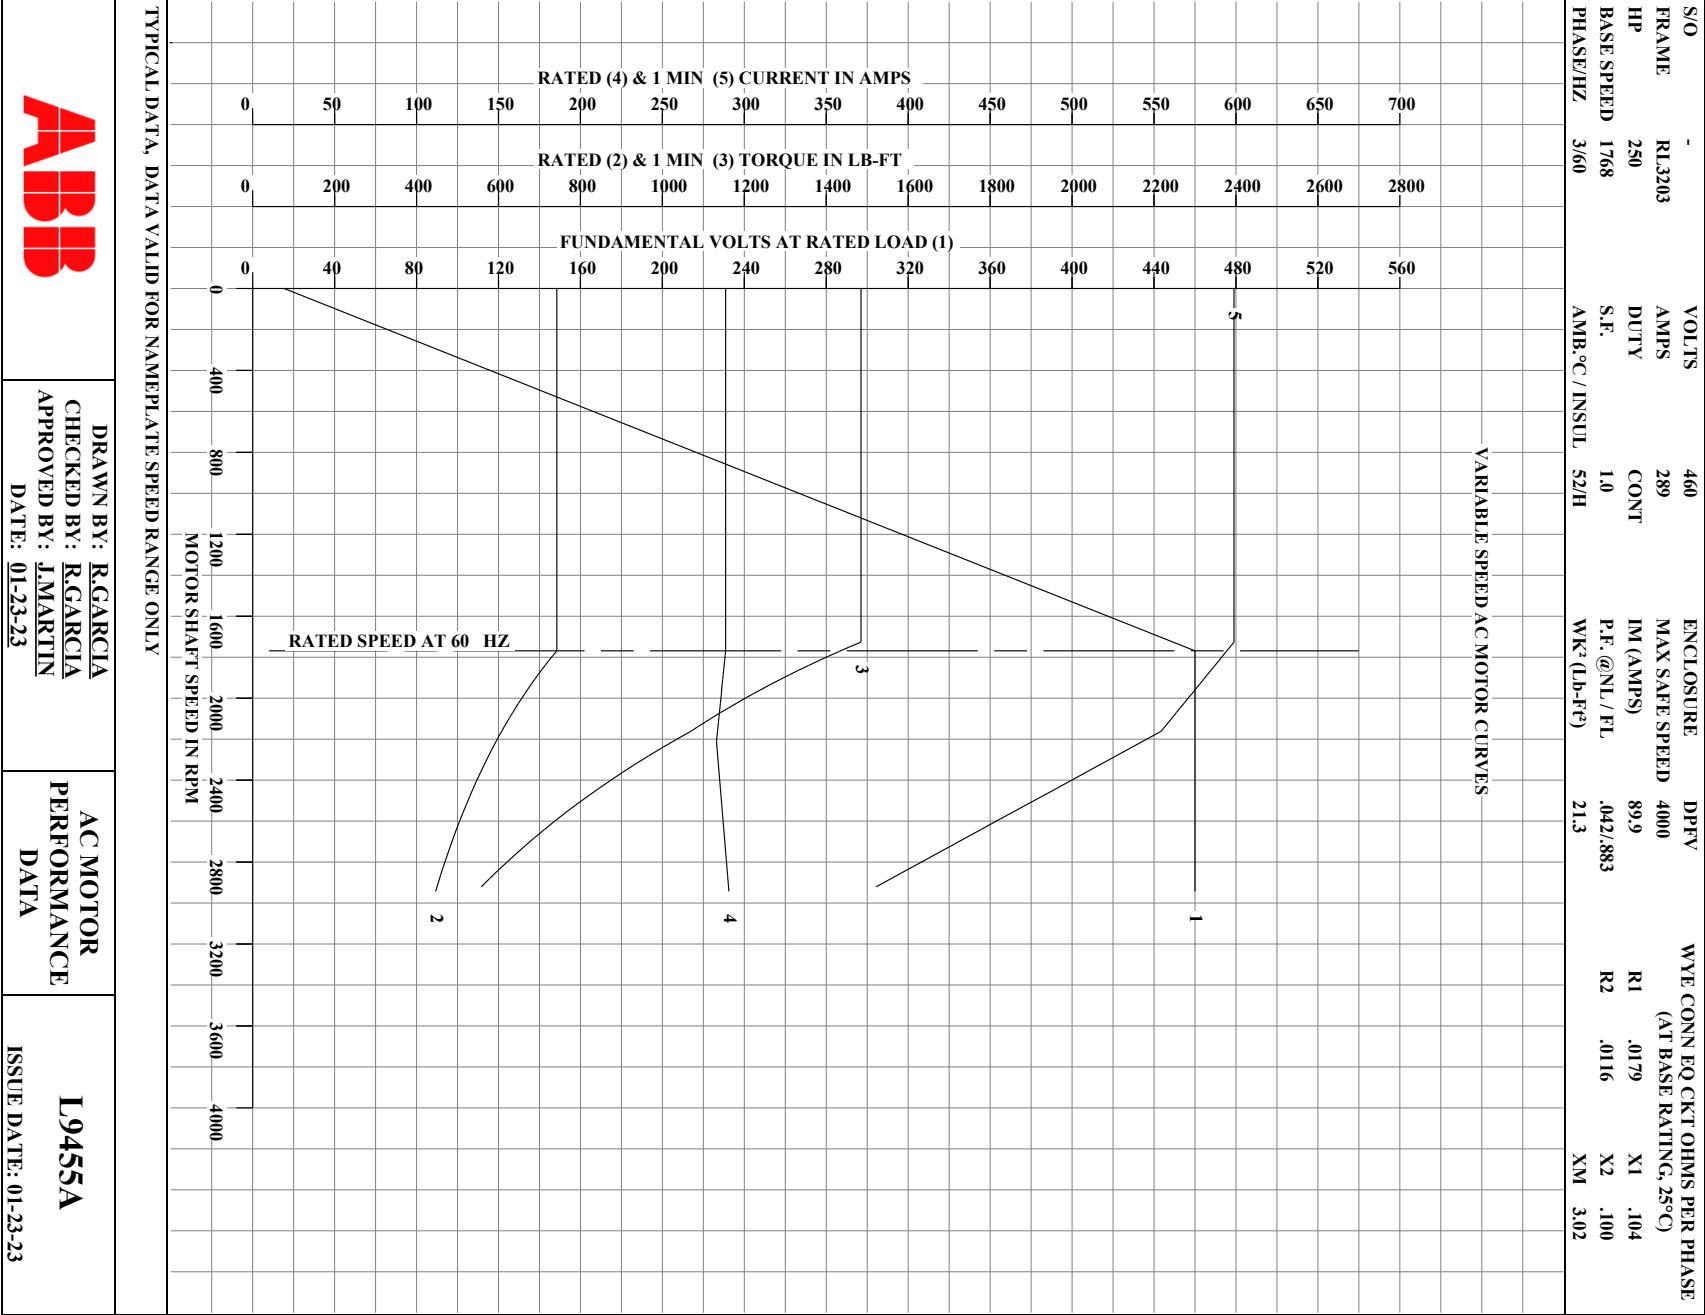


DRAWN BY: R.GARCIA
CHECKED BY: R.GARCIA
APPROVED BY: J.MARTIN
DATE: 01-23-23

AC MOTOR
PERFORMANCE
DATA

L9455A
ISSUE DATE: 01-23-23

Printed on 05/11/2023 11:06 AM

S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)
FRAME	RL3203	AMPS	289	MAX SAFE SPEED	4000	R1 .0179 X1 .104
HP	250	DUTY	CONT	IM (AMPS)	89.9	R2 .0116 X2 .100
BASE SPEED	1768	S.F.	1.0	P.F. @NL / FL	.042/.883	X3 .302
PHASE/HZ	3/60	AMB. °C / INSUL.	52/H	WK² (Lb-Ft²)	21.3	

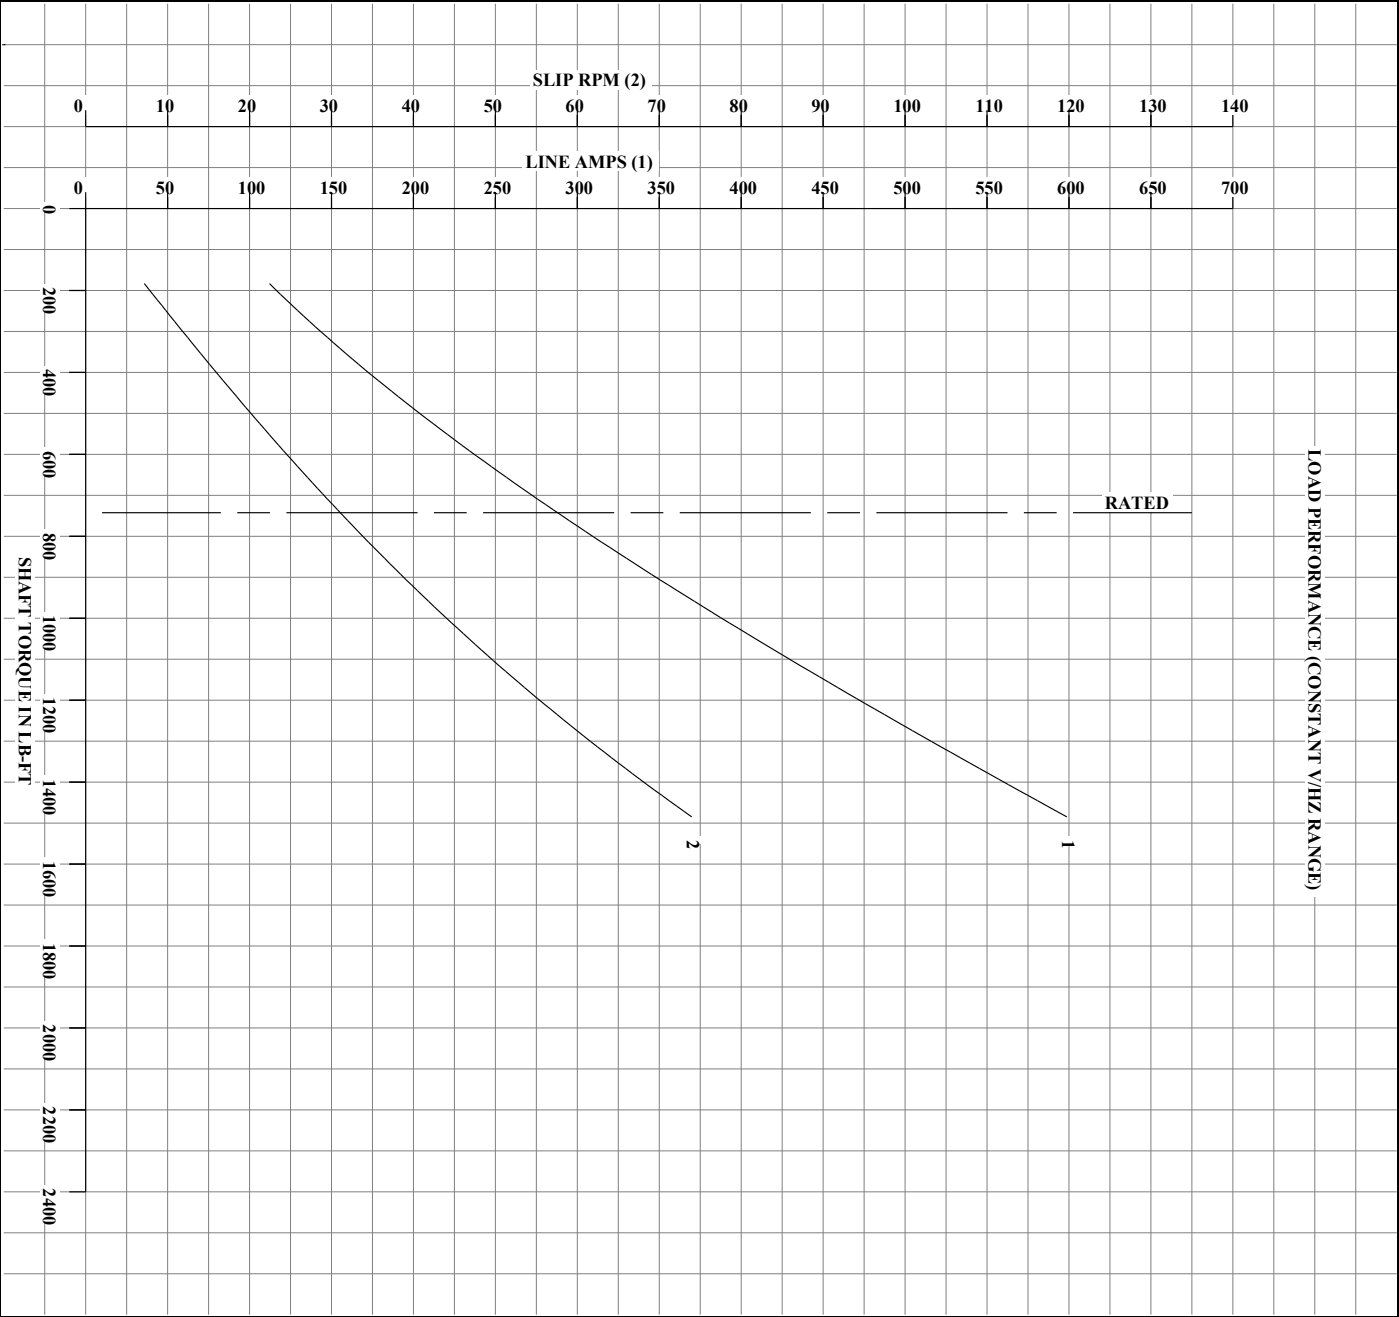

TYPICAL DATA. DATA VALID FOR NAMEPLATE SPEED RANGE ONLY



DRAWN BY: R.GARCIA

CHECKED BY: R.GARCIA

APPROVED BY: J.MARTIN


DATE: 01-23-23

AC MOTOR
PERFORMANCE
DATA


L9455A
ISSUE DATE: 01-23-23

USRIGAR4

Printed on 05/11/2023 11:06 AM

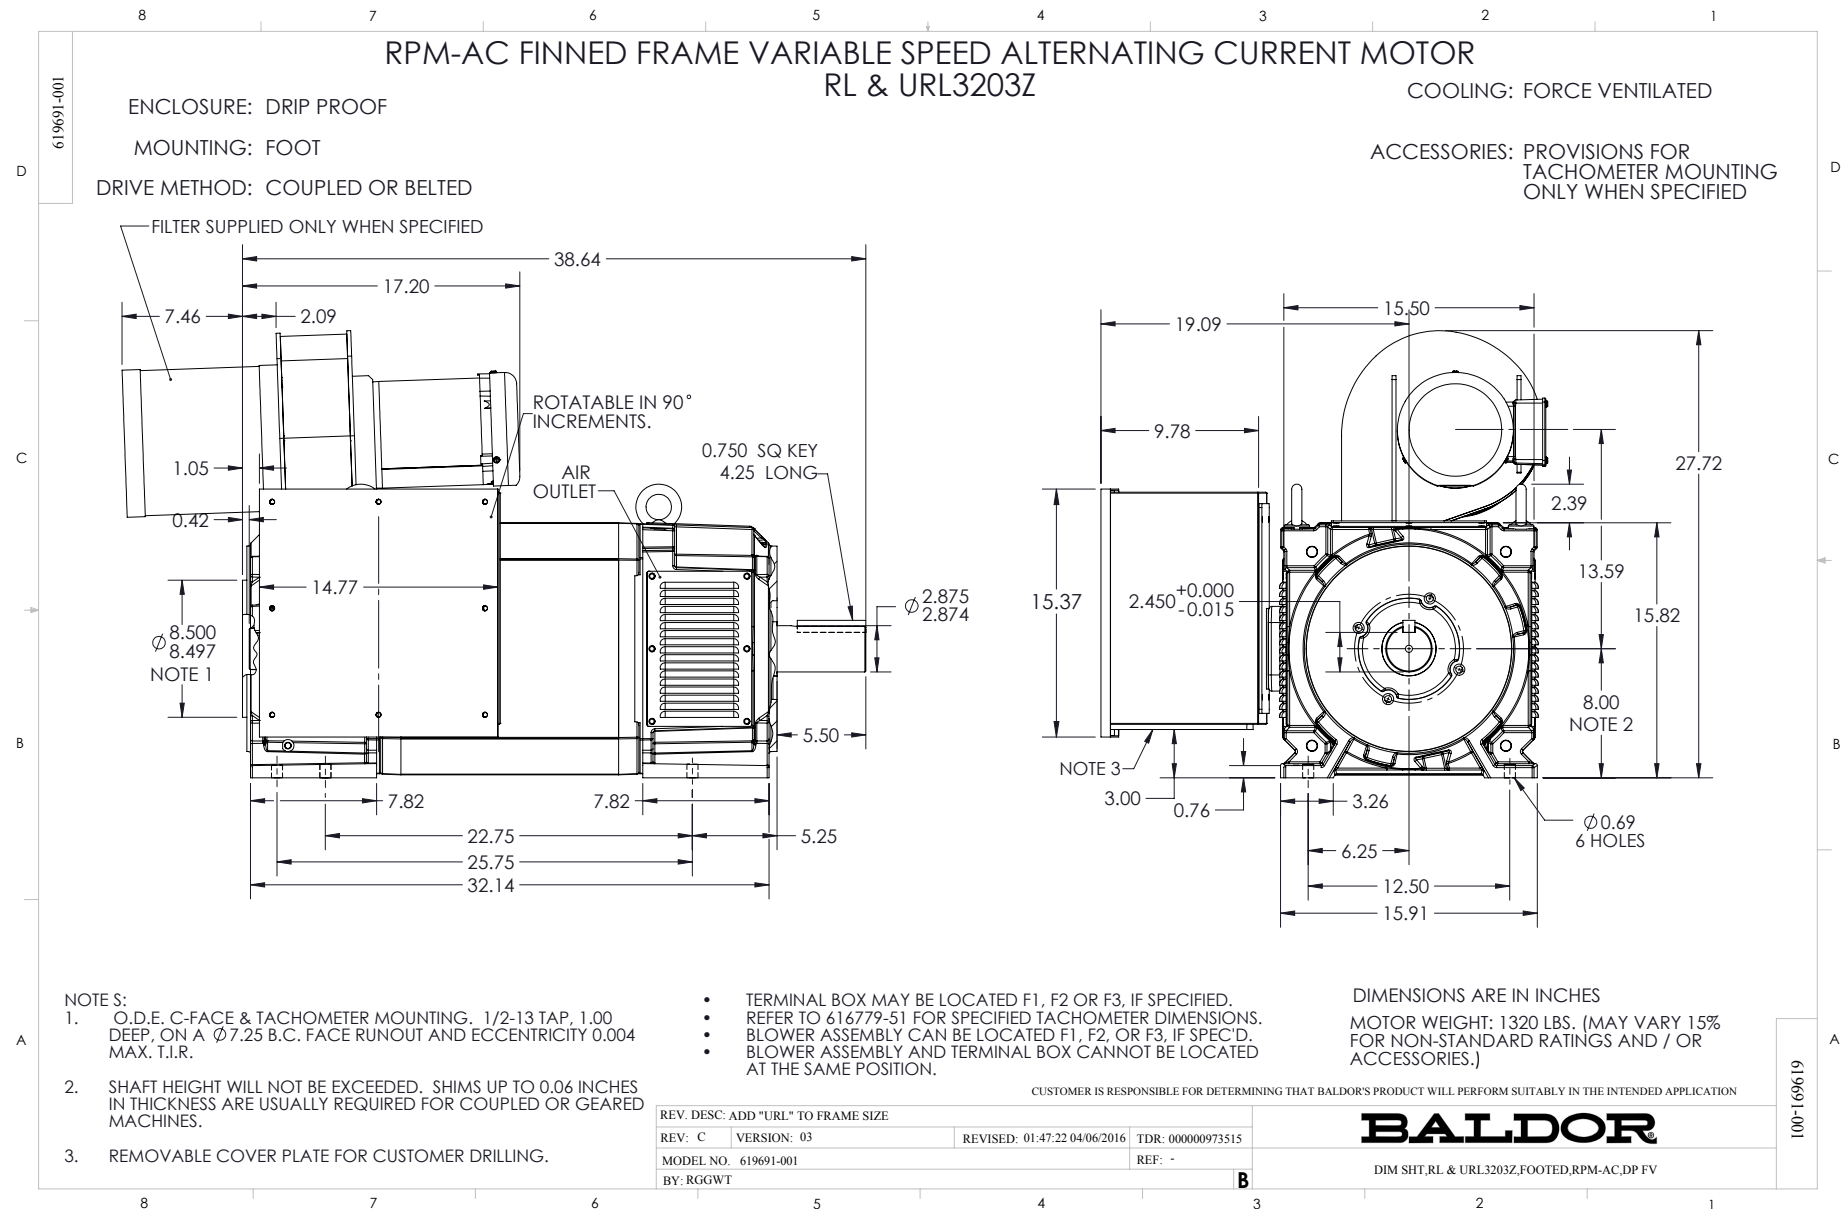

422927-001

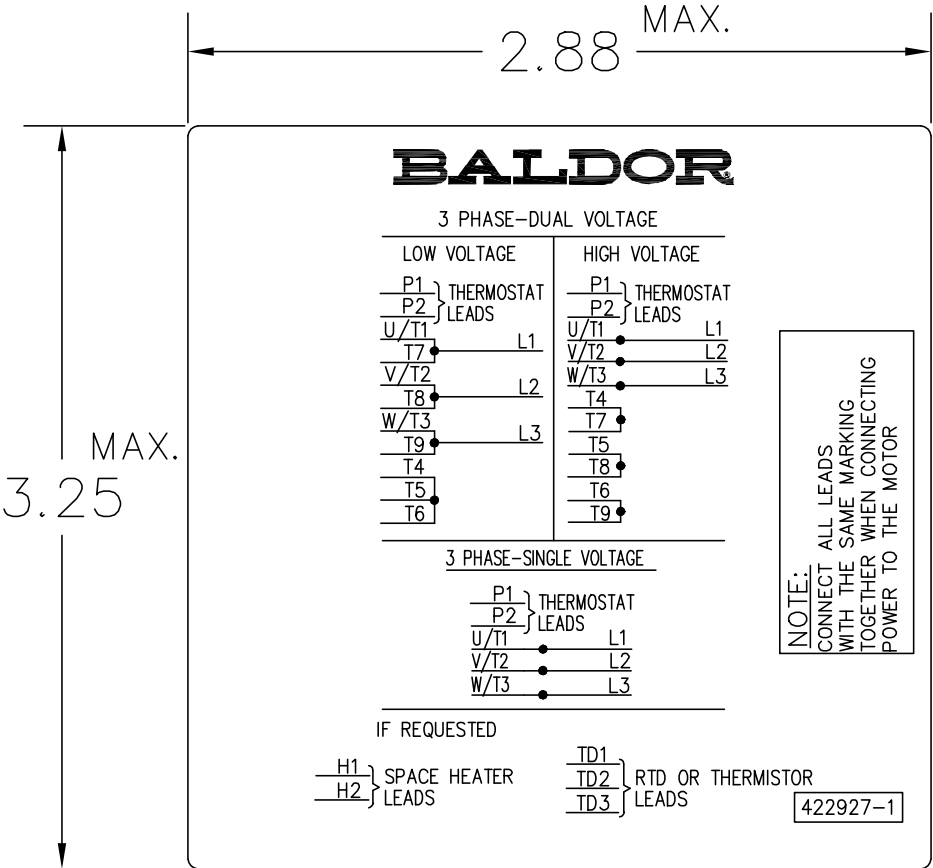

NOTE:
DATA TO BE SIZED
SO THAT IT FITS INTO
MATERIAL DECAL
DIMENSIONS. MAKE
LETTERS & NUMBERS
AS LARGE AS POSSIBLE.

MATERIAL: CERAMATIC DGF-P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS
AND LINES TO BE BLACK
ON WHITE BACKGROUND.

NOTE:
CONNECT ALL LEADS
WITH THE SAME MARKING
TOGETHER WHEN CONNECTING
POWER TO THE MOTOR

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE		
REV. LTR: B	VERSION: 02	TDR: 000000788708
FILE: \RGG\00000\203		REVISED: 08:09:29 03/04/2013
MTL: -		BY: RGGWT

BALDOR

EXTERNAL CONNECTION LABEL

SH 1 of 1

422927-001