



Customer information packet

IDDRPM407004R1

700HP, 1780/2400, 460V, RL4058, DPFV, F1

Specifications

Enclosure	DPFV
Frame	RL4058
Frame Material	Exposed Laminations
Frequency	60.00 Hz
Output @ Frequency	700.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ
Agency Approvals	CCSA US
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	777.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Frame Prefix	RL
Heater Indicator	No Heater
High Voltage Full Load Amps	777.0 a
Insulation Class	H
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	54.62 IN
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Service Factor	1.00
Shaft Diameter	3.624 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1780 rpm
Starting Method	Full Voltage
Thermal Device - Bearing	None

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	L9462A
Layout	619660-001
Eff. date	03-23-2023
CD Diagram	422927-001
Poles	04
Leads	
Proprietary	False
Created date	02-03-2023

Thermal Device - Winding

Normally Closed Thermostat

Nameplate

000613006MY

	DUTY	HP	RPM	AMPS	VOLTS	HZ	
	CONT	700	1780	778	460		60
	CONT	700	2400	765	460		81
CAT.NO.	IDDRPM407004R1		SPEC. NO.		R40-A000-0301		
SER.NO			FR	RL 4058	INSUL	H	
PH.	3	MAX SAFE SPEED		3750	AMB.	40	MIN. AMB. -25
DESIGN NO.	L9462A		TYPE		ENCL.	DP	
S.F.	1.00		D.E. BRG.	95BC02J30X			
ENCL MOD	FORCE VENT		O.D.E. BRG.	6316/C3VL0241			

S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)		
FRAME	RL4058	AMPS	778	MAX SAFE SPEED	3750			
HP	700	DUTY	CONT	IM (AMPS)	216	R1	.00430	X1 .0342
BASE SPEED	1780	S.F.	1.0	P.F. @NL / FL	.036/.899	R2	.00266	X2 .0385
PHASE/HZ	3/60	AMB.°C / INSUL	40/H	WK² (Lb-Ft²)	98	X3 1.26		

RATED FULL LOAD DATA

	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
BASE SPEED	1781	700	2065	460	60	778
MAX SPEED	2404	701	1531	460	81	765
MIN SPEED	0	0	2065	10.0	.635	778

LOAD PERFORMANCE AT BASE SPEED


	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
NO LOAD	1800	0	0	460	60	211
1/4	1796	175	513	460	60	286
1/2	1791	350	1028	460	60	429
3/4	1786	525	1544	460	60	596
FULL LOAD	1781	700	2065	460	60	778
0/L	1756	1381	4129	460	60	1611

REMARKS:
TYPICAL DATA

	DRAWN BY: A. BROOKINS CHECKED BY: R. GARCIA APPROVED BY: J. MARTIN DATE: 3-16-23	AC MOTOR PERFORMANCE DATA	L9462A ISSUE DATE 3-16-23
---	---	---------------------------------	------------------------------

S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)
FRAME	RL4058	AMPS	778	MAX SAFE SPEED	3750	R1 .00430 X1 .0342
HP	700	DUTY	CONT	IM (AMPS)	216	R2 .00266 X2 .0385
BASE SPEED	1780	S.F.	1.0	P.F. @NL / FL	.036/.899	X1 .0342
PHASE/HZ	3/60	AMB.°C / INSUL.	40/H	WK² (Lb-Ft²)	98	X2 .0385
						X1 1.26

VARIABLE SPEED AC MOTOR CURVES

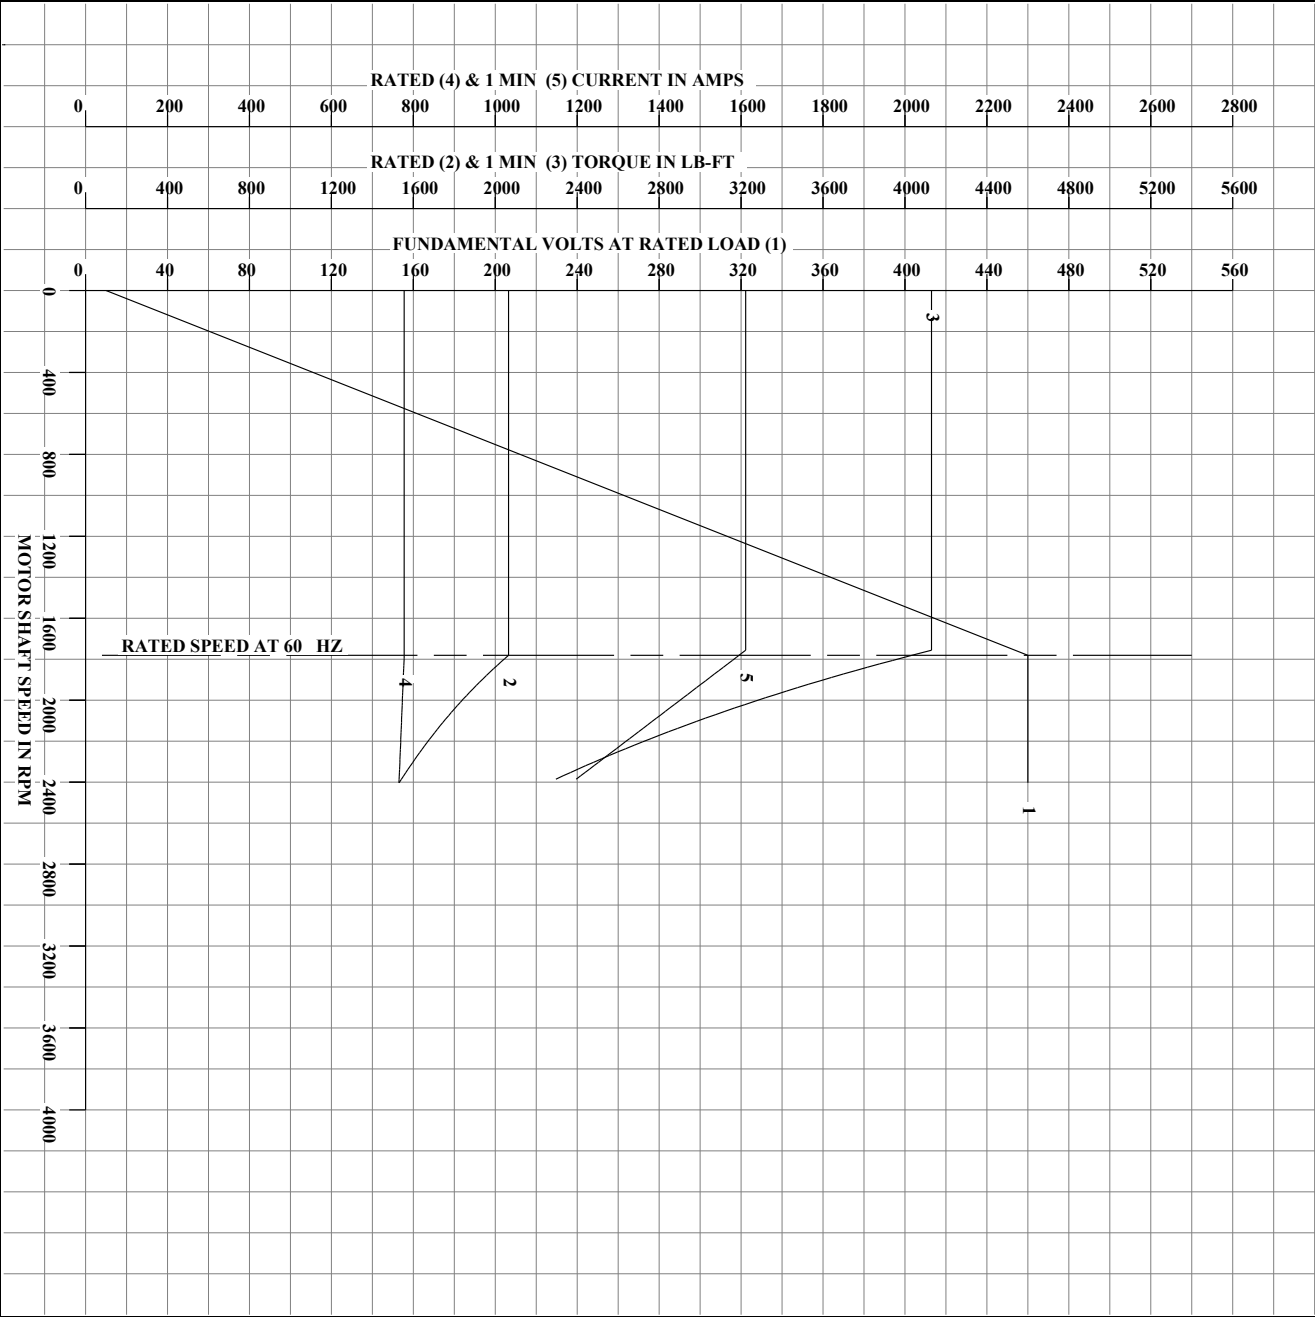


TYPICAL DATA. DATA VALID FOR NAMEPLATE SPEED RANGE ONLY

	DRAWN BY: A. BROOKINS CHECKED BY: R. GARCIA APPROVED BY: J. MARTIN DATE: 3-16-23	AC MOTOR PERFORMANCE DATA	L9462A ISSUE DATE: 3-16-23
--	---	---------------------------------	-------------------------------


USANBR028

Printed on 03/16/2023 1:57 PM

USANBR028

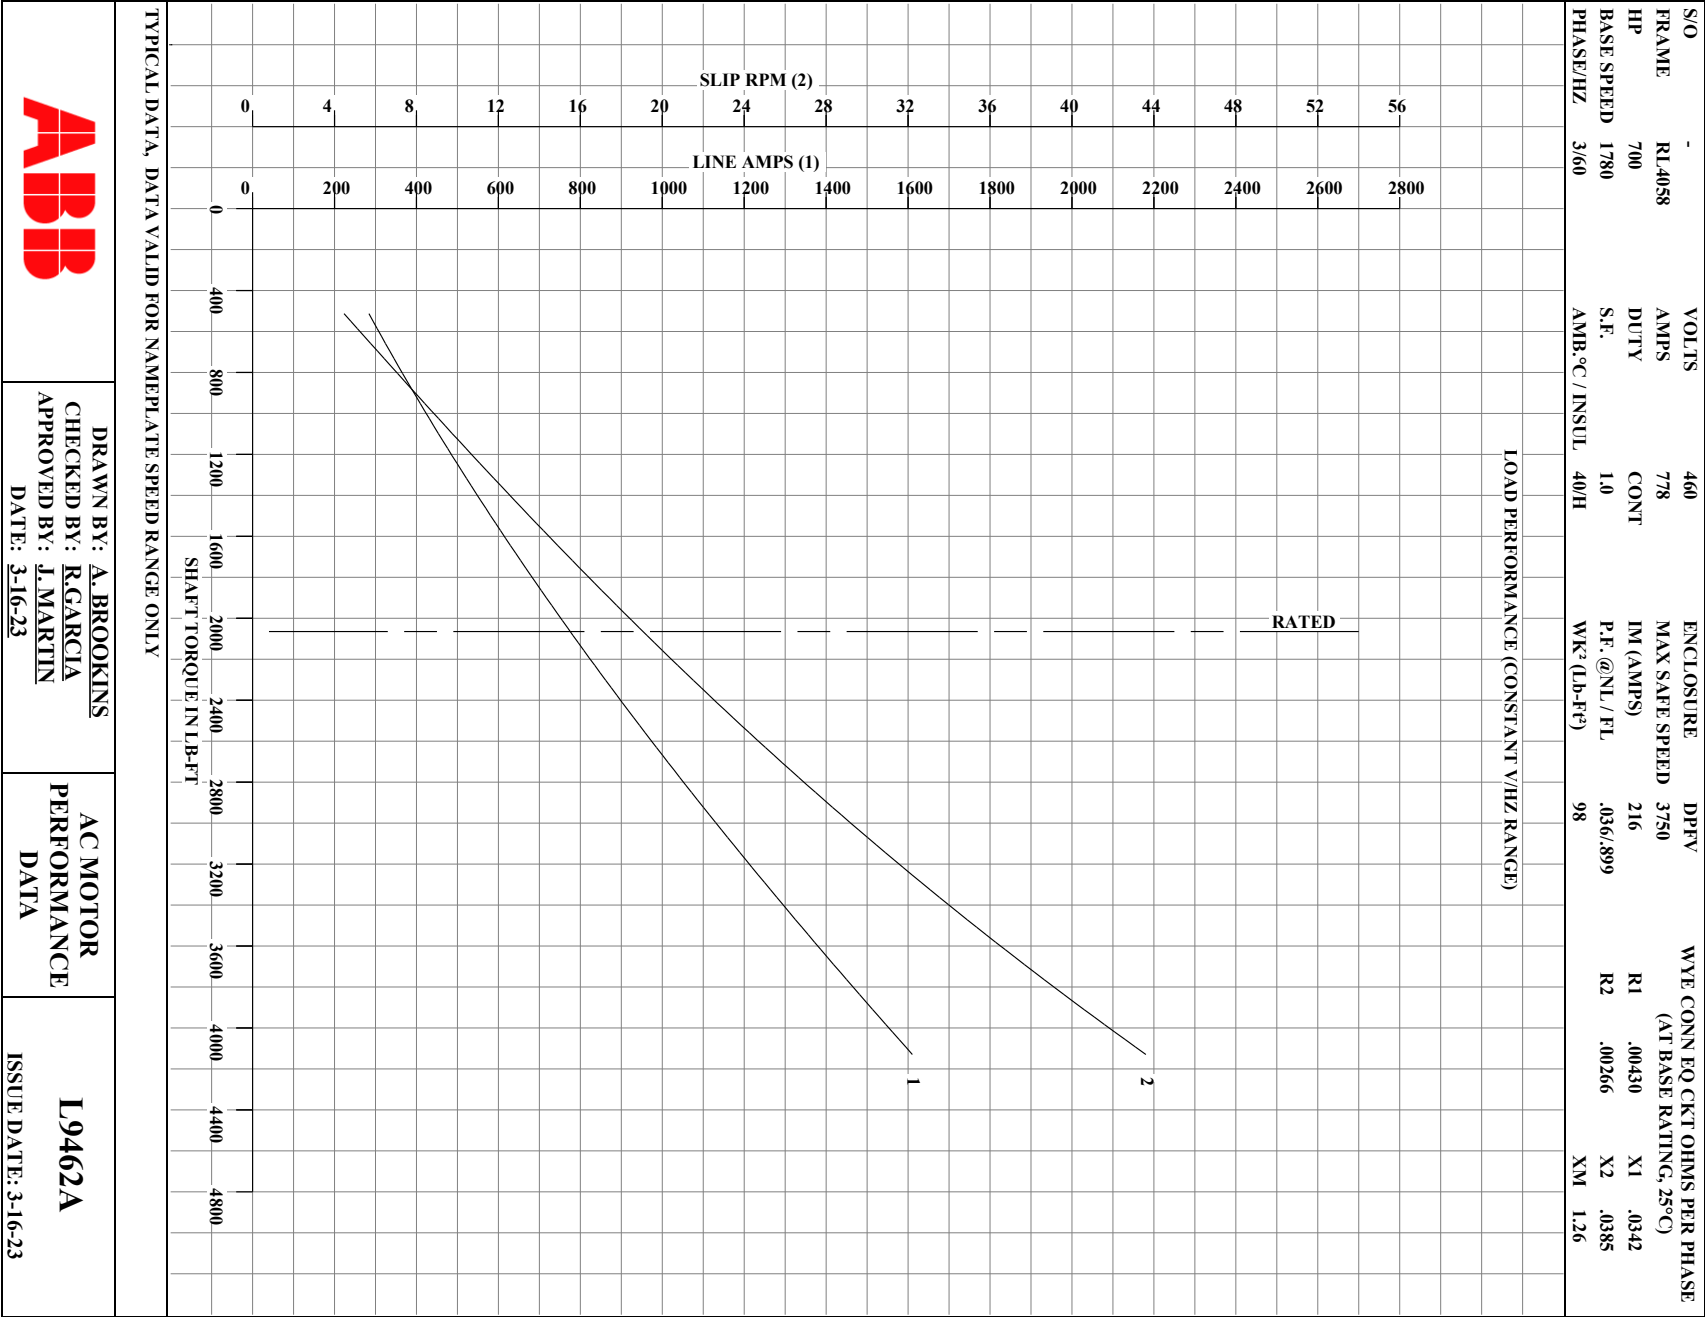


Printed on 03/16/2023 1:57 PM

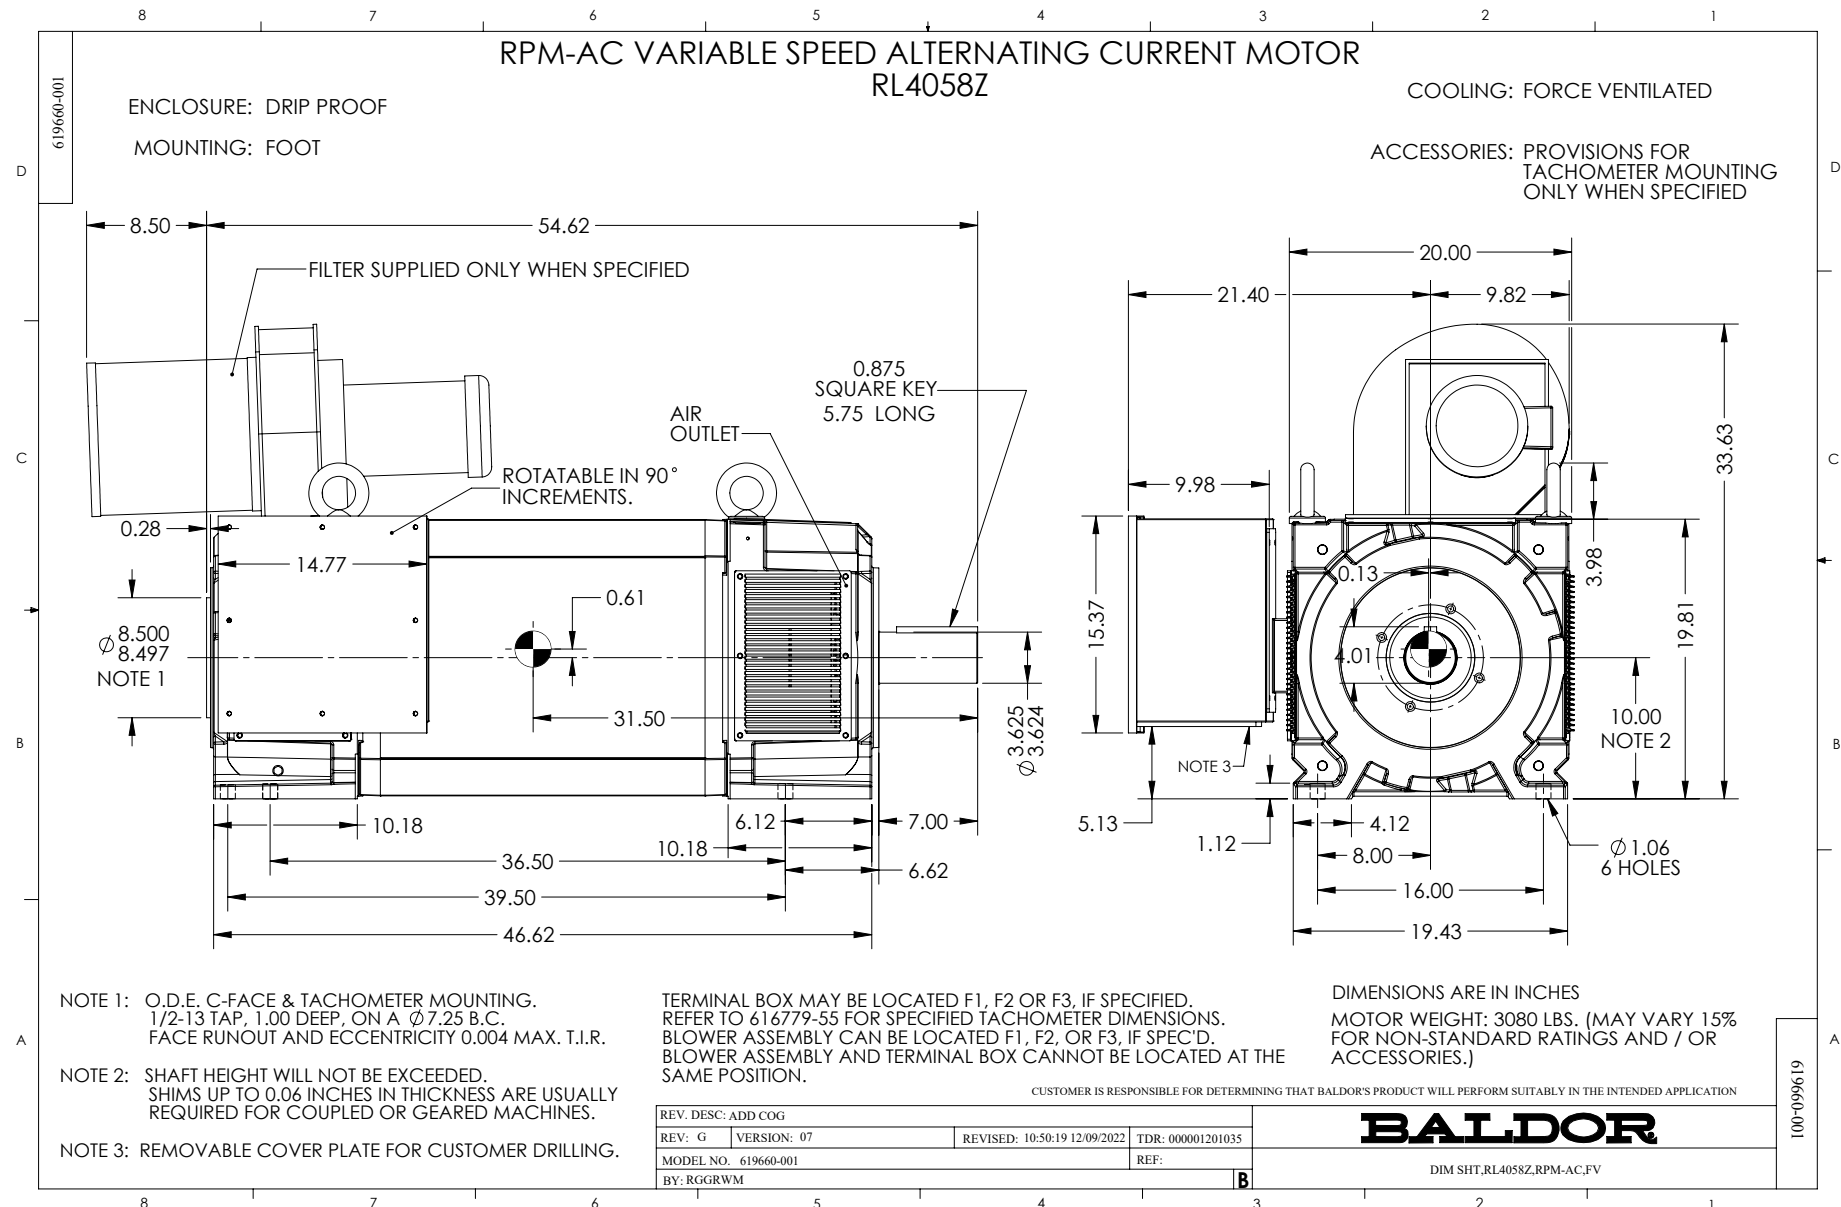

422927-001

NOTE:
DATA TO BE SIZED
SO THAT IT FITS INTO
MATERIAL DECAL
DIMENSIONS. MAKE
LETTERS & NUMBERS
AS LARGE AS POSSIBLE.

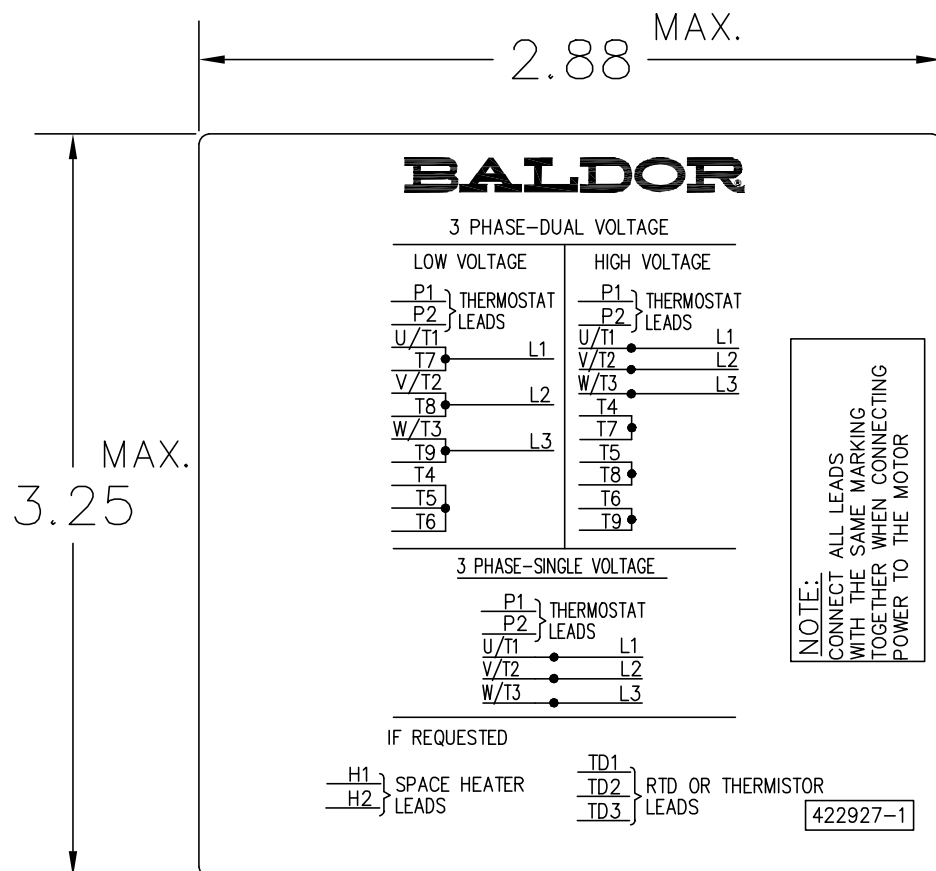

MATERIAL: CERAMATIC DGF-P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS
AND LINES TO BE BLACK
ON WHITE BACKGROUND.

NOTE:
CONNECT
WITH THE
TOGETHER
POWER T

422927-1

422927-001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE		
REV. LTR: B	VERSION: 02	TDR: 000000788708
FILE: \RGG\00000\203		REVISED: 08:09:29 03/04/2013
MTL: -		BY: RGGWT

BALDOR

EXTERNAL CONNECTION LABEL

SH 1 of 1