



Customer information packet

IDDRPM4410004R2

1000HP, 1750, 460V, RL4473, DPFV, F1

Specifications

Enclosure	DPFV
Frame	RL4473Z
Frame Material	Exposed Laminations
Frequency	90.00 Hz
Output @ Frequency	1000.000 HP @ 90 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 90 HZ
Voltage @ Frequency	460.0 V @ 90 HZ
Agency Approvals	CCSA US
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	1196.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	ENCODER
Frame Prefix	RL
Heater Indicator	No Heater
High Voltage Full Load Amps	1196.0 a
Insulation Class	H
IP Rating	NONE
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	67.64 IN
Product Family	General Industrial
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	4.250 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1785 rpm
Starting Method	Full Voltage

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	L9466A
Layout	617603-001
Eff. date	03-23-2023
CD Diagram	422927-001
Poles	06
Leads	
Proprietary	False
Created date	02-23-2023

Thermal Device - Bearing	None
Thermal Device - Winding	Thermostat And RTD

Nameplate

000613006MY							
	DUTY	HP	RPM	AMPS	VOLTS	HZ	
	CONT	1000	1785		1196	460	90
	CONT	1000	2550		1180	460	128.6
CAT.NO.	IDDRPM4410004R2		SPEC. NO.		R44-A000-0225		
SER.NO			FR	RL4473Z	INSUL	H	
PH.	3	MAX SAFE SPEED		2700	AMB.	40	MIN. AMB. -25
DESIGN NO.	L9466A		TYPE		ENCL.	DPG-FV	
S.F.	1.00		D.E. BRG.		110BC02J30X		
ENCL MOD			O.D.E. BRG.		6222/C3VL0241		
	IP23						

S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)		
FRAME	RL4473	AMPS	1196	MAX SAFE SPEED	2700			
HP	1000	DUTY	CONT	IM (AMPS)	443	R1	.00170	X1 .0248
BASE SPEED	1785	S.F.	1.0	P.F. @NL / FL	.020/.824	R2	.00126	X2 .0371
PHASE/HZ	3/90	AMB.°C / INSUL	40/H	WK² (Lb-Ft²)	233			XM .595

RATED FULL LOAD DATA

	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
BASE SPEED	1786	1000	2941	460	90	1197
MAX SPEED	2550	1001	2060	460	128.6	1180
MIN SPEED	0	0	2941	6.02	.7073	1197

LOAD PERFORMANCE AT BASE SPEED

	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
NO LOAD	1800	0	0	460	90	443
1/4	1797	250	732	460	90	523
1/2	1793	500	1466	460	90	710
3/4	1790	750	2201	460	90	940
FULL LOAD	1786	1000	2941	460	90	1197
0/L	1766	1979	5882	460	90	2423

REMARKS:


	DRAWN BY: A. BROOKINS CHECKED BY: R.GARCIA APPROVED BY: J. MARTIN DATE: 3-21-23	AC MOTOR PERFORMANCE DATA	L9466A ISSUE DATE 3-21-23
---	--	---------------------------------	------------------------------

USANBRO28


Printed on 03/21/2023 8:46 AM

USANBR028


Printed on 03/21/2023 8:46 AM

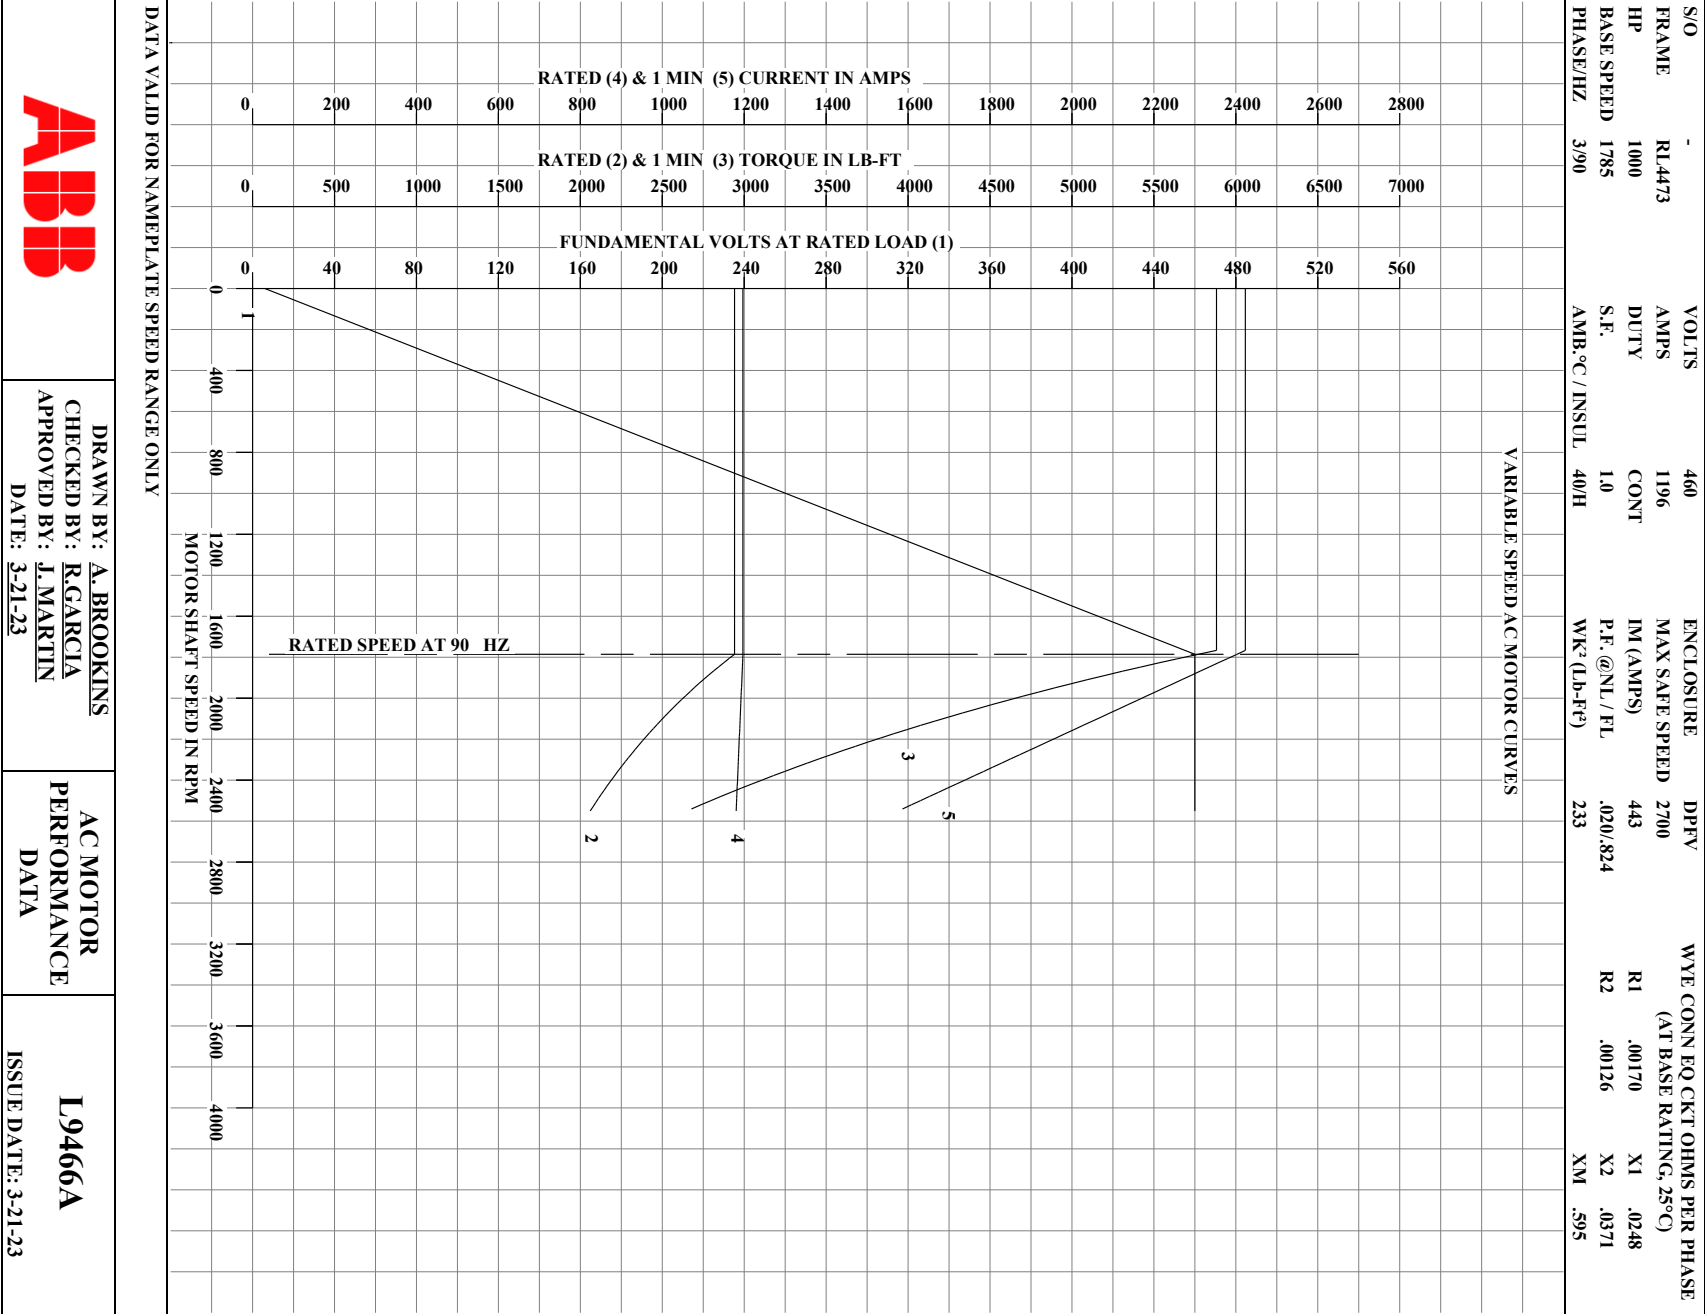

USANBR028

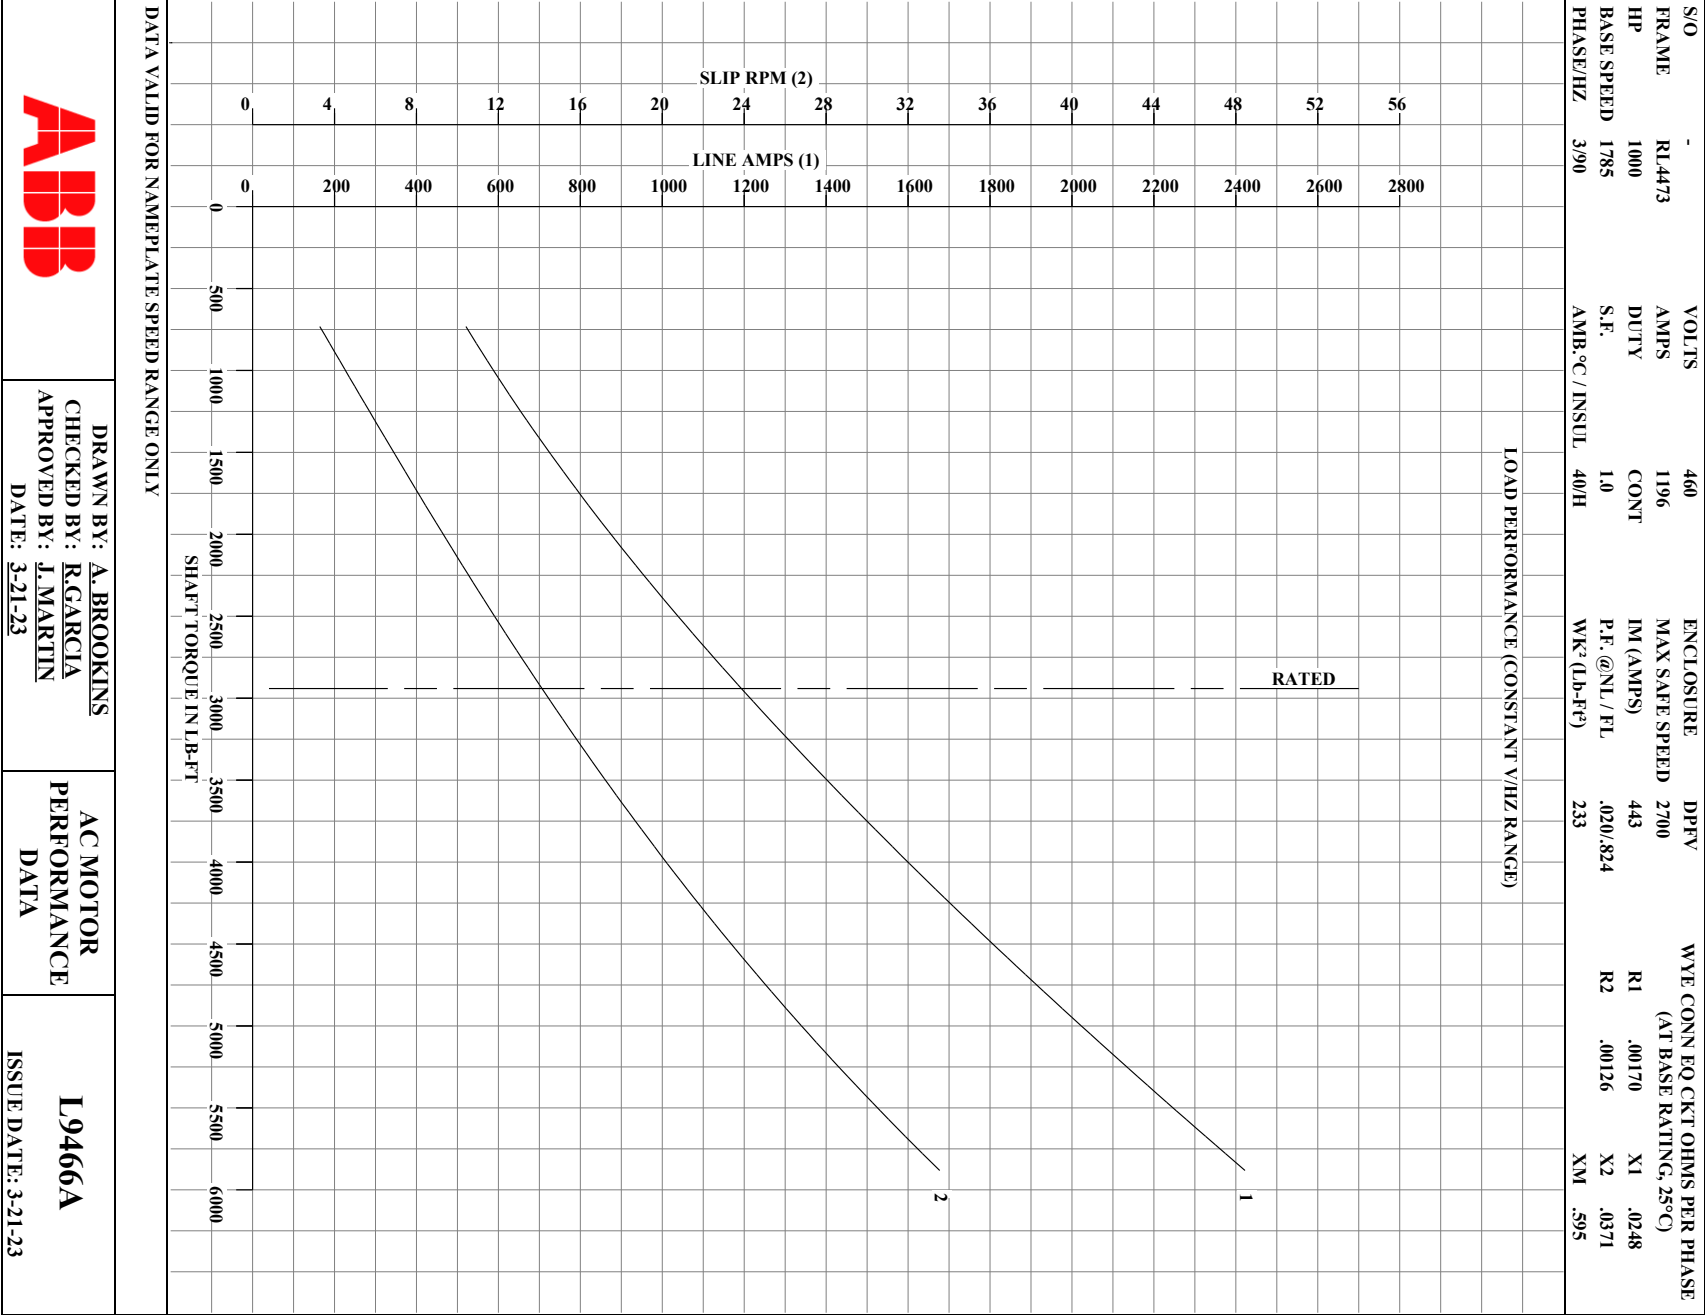


Printed on 03/21/2023 8:46 AM

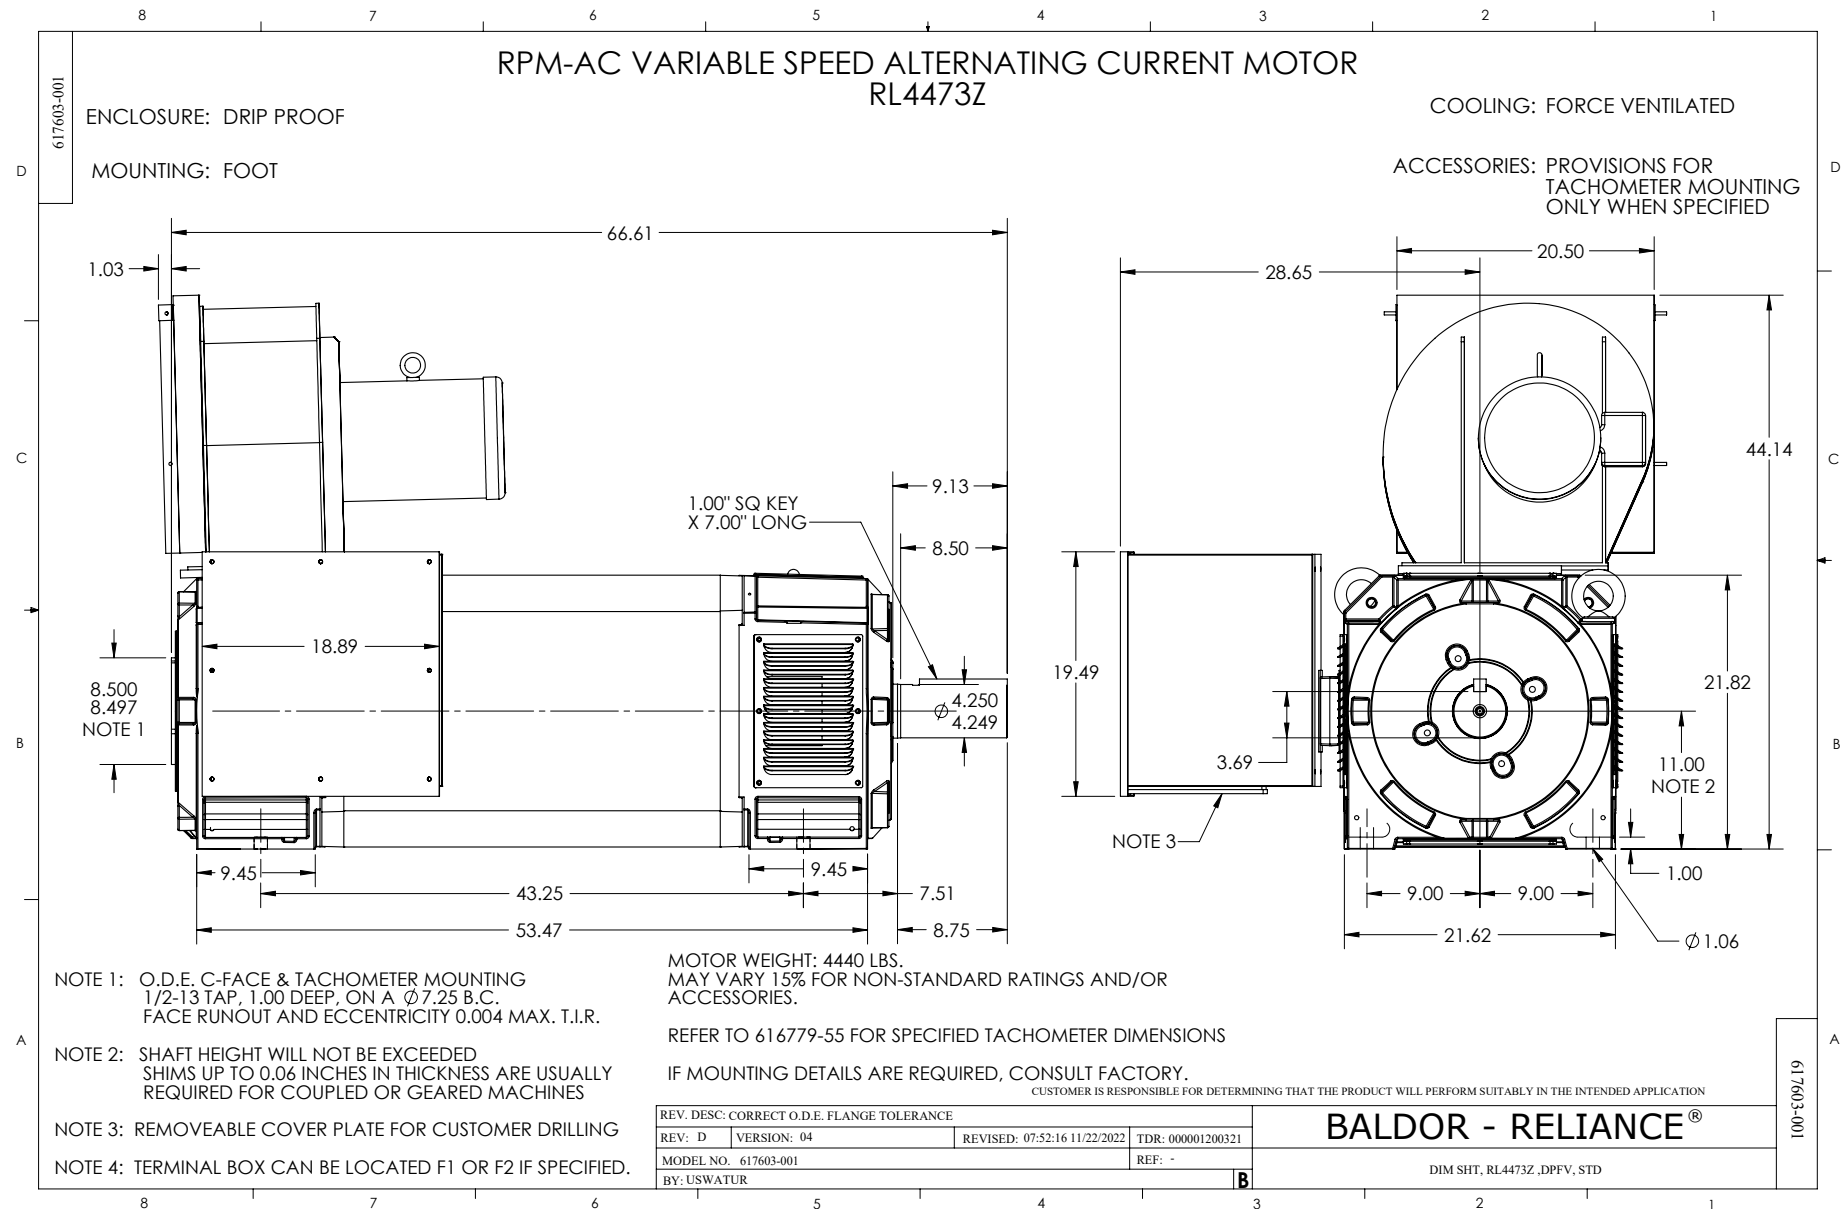

422927-001

NOTE:
DATA TO BE SIZED
SO THAT IT FITS INTO
MATERIAL DECAL
DIMENSIONS. MAKE
LETTERS & NUMBERS
AS LARGE AS POSSIBLE.

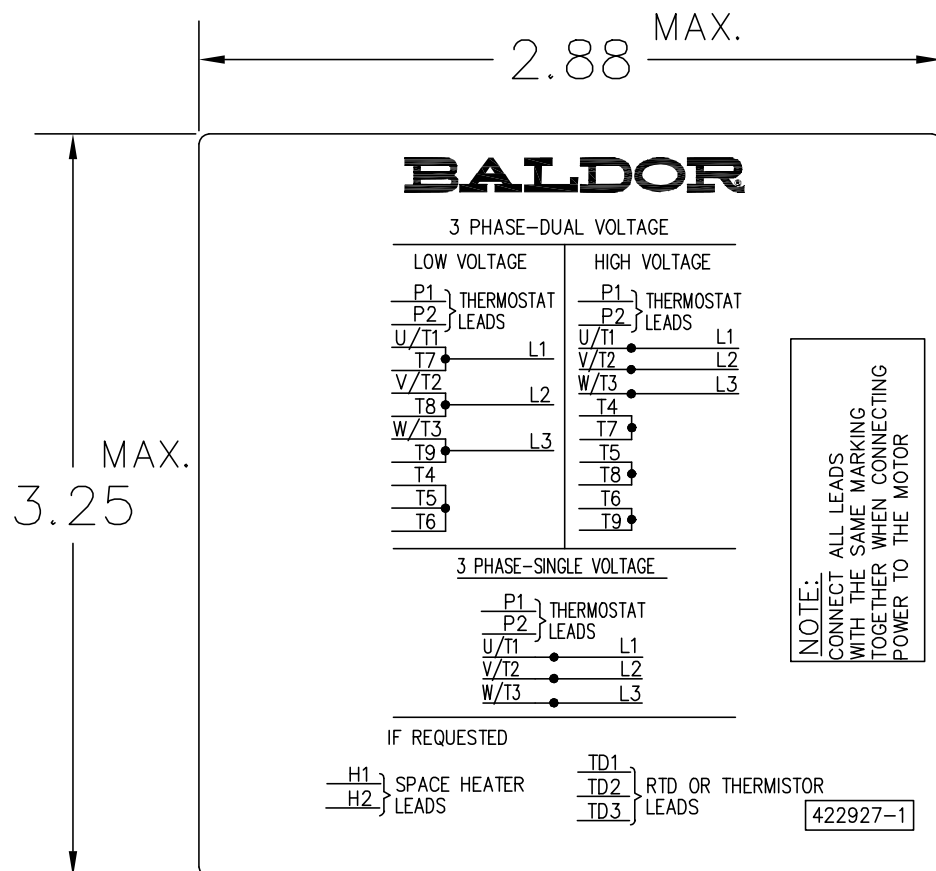

MATERIAL: CERAMATIC DGF-P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS
AND LINES TO BE BLACK
ON WHITE BACKGROUND.

NOTE:
CONNECT
WITH THE
TOGETHER
POWER T

422927-1

422927-001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE		
REV. LTR: B	VERSION: 02	TDR: 000000788708
FILE: \RGG\00000\203		REVISED: 08:09:29 03/04/2013
MTL: -		BY: RGGWT

BALDOR

EXTERNAL CONNECTION LABEL

SH 1 of 1