



Customer information packet

IDDRPM4410004R2ED

1000HP, 1750, 460V, RL4473, DPFV, F1

Specifications

Enclosure	DPFV
Frame	RL4473Z
Frame Material	Exposed Laminations
Frequency	90.00 Hz
Output @ Frequency	1000.000 HP @ 90 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 90 HZ
Voltage @ Frequency	460.0 V @ 90 HZ
Agency Approvals	CCSA US
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	1196.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Frame Prefix	RL
Heater Indicator	No Heater
High Voltage Full Load Amps	1196.0 a
Insulation Class	H
IP Rating	NONE
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	67.64 IN
Product Family	Extruder
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	4.250 IN
Shaft Ground Indicator	Shaft Grounding
Shaft Rotation	Reversible
Speed	1785 rpm
Starting Method	Full Voltage

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	L9466A
Layout	617603-001
Eff. date	03-23-2023
CD Diagram	422927-001
Poles	06
Leads	
Proprietary	False
Created date	02-28-2023

Thermal Device - Bearing	None
Thermal Device - Winding	Thermostat And RTD

Nameplate

000613006ABS							
	DUTY	HP	RPM	AMPS	VOLTS	HZ	
	CONT	1000	1785		1196	460	90
	CONT	1000	2550		1180	460	128.6
CAT.NO.	IDDRPM4410004R2ED			SPEC. NO.	R44-A000-0227		
SER.NO				FR	RL4473Z	INSUL	H
PH.	3	MAX SAFE SPEED			2700	AMB.	40
DESIGN NO.	L9466A			TYPE		ENCL.	DPG-FV
S.F.	1.00			D.E. BRG.	110BC02J30X		
ENCL MOD				O.D.E. BRG.	6222/C3VL0241		
	IDDRPM4410004R2ED					IP23	

S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)		
FRAME	RL4473	AMPS	1196	MAX SAFE SPEED	2700			
HP	1000	DUTY	CONT	IM (AMPS)	443	R1	.00170	X1 .0248
BASE SPEED	1785	S.F.	1.0	P.F. @NL / FL	.020/.824	R2	.00126	X2 .0371
PHASE/HZ	3/90	AMB.°C / INSUL	40/H	WK² (Lb-Ft²)	233			X4 .595

RATED FULL LOAD DATA

	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
BASE SPEED	1786	1000	2941	460	90	1197
MAX SPEED	2550	1001	2060	460	128.6	1180
MIN SPEED	0	0	2941	6.02	.7073	1197

LOAD PERFORMANCE AT BASE SPEED


	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
NO LOAD	1800	0	0	460	90	443
1/4	1797	250	732	460	90	523
1/2	1793	500	1466	460	90	710
3/4	1790	750	2201	460	90	940
FULL LOAD	1786	1000	2941	460	90	1197
0/L	1766	1979	5882	460	90	2423

REMARKS:


	DRAWN BY: A. BROOKINS CHECKED BY: R.GARCIA APPROVED BY: J. MARTIN DATE: 3-21-23	AC MOTOR PERFORMANCE DATA	L9466A ISSUE DATE 3-21-23
---	--	---------------------------------	------------------------------

USANBRO28

Printed on 03/21/2023 8:46 AM



S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)
FRAME	RL4473	AMPS	1196	MAX SAFE SPEED	2700	R1 .00170 X1 .0248
HP	1000	DUTY	CONT	IM (AMPS)	443	R2 .00126 X2 .0371
BASE SPEED	1785	S.F.	1.0	P.F. @NL / FL	.020 / .824	XM .595
PHASE/HZ	3/90	AMB. °C / INSUL.	40/H	WK² (Lb-Ft²)	233	

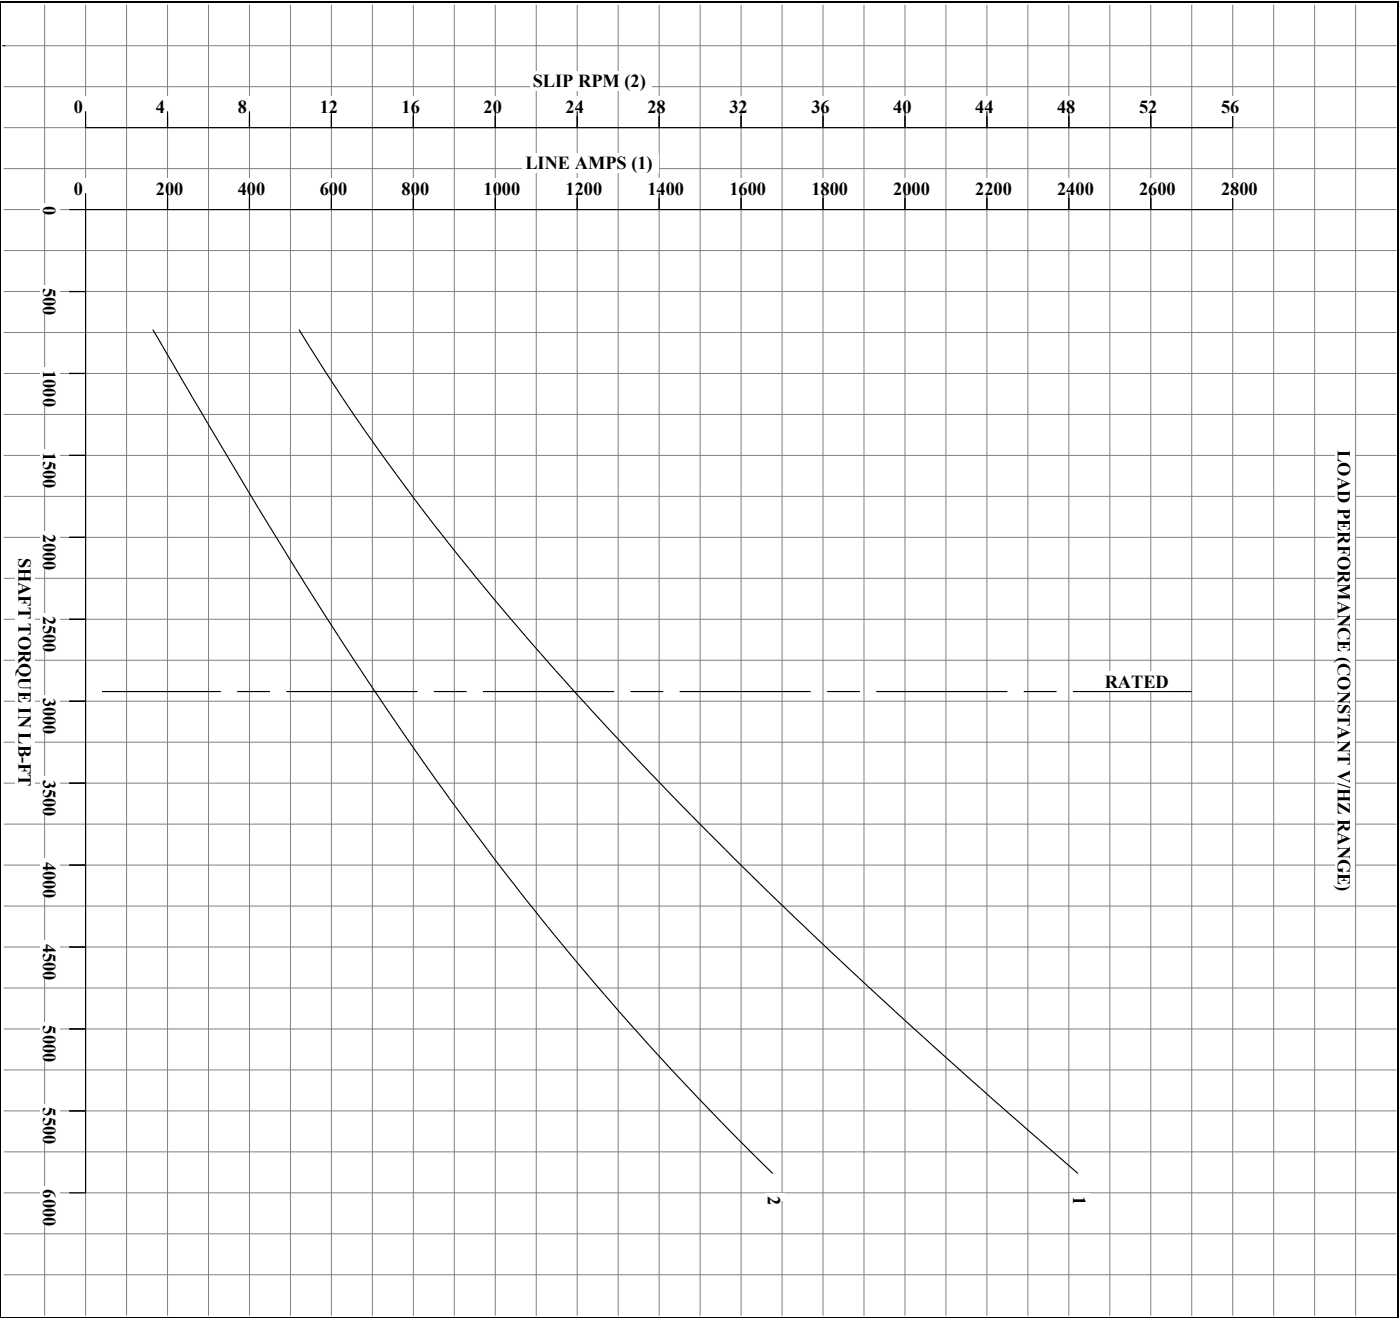

DATA VALID FOR NAMEPLATE SPEED RANGE ONLY



DRAWN BY: A. BROOKINS

CHECKED BY: R. GARCIA

APPROVED BY: J. MARTIN


DATE: 3-21-23

AC MOTOR
PERFORMANCE
DATA


L9466A
ISSUE DATE: 3-21-23

USANBR028

Printed on 03/21/2023 8:46 AM

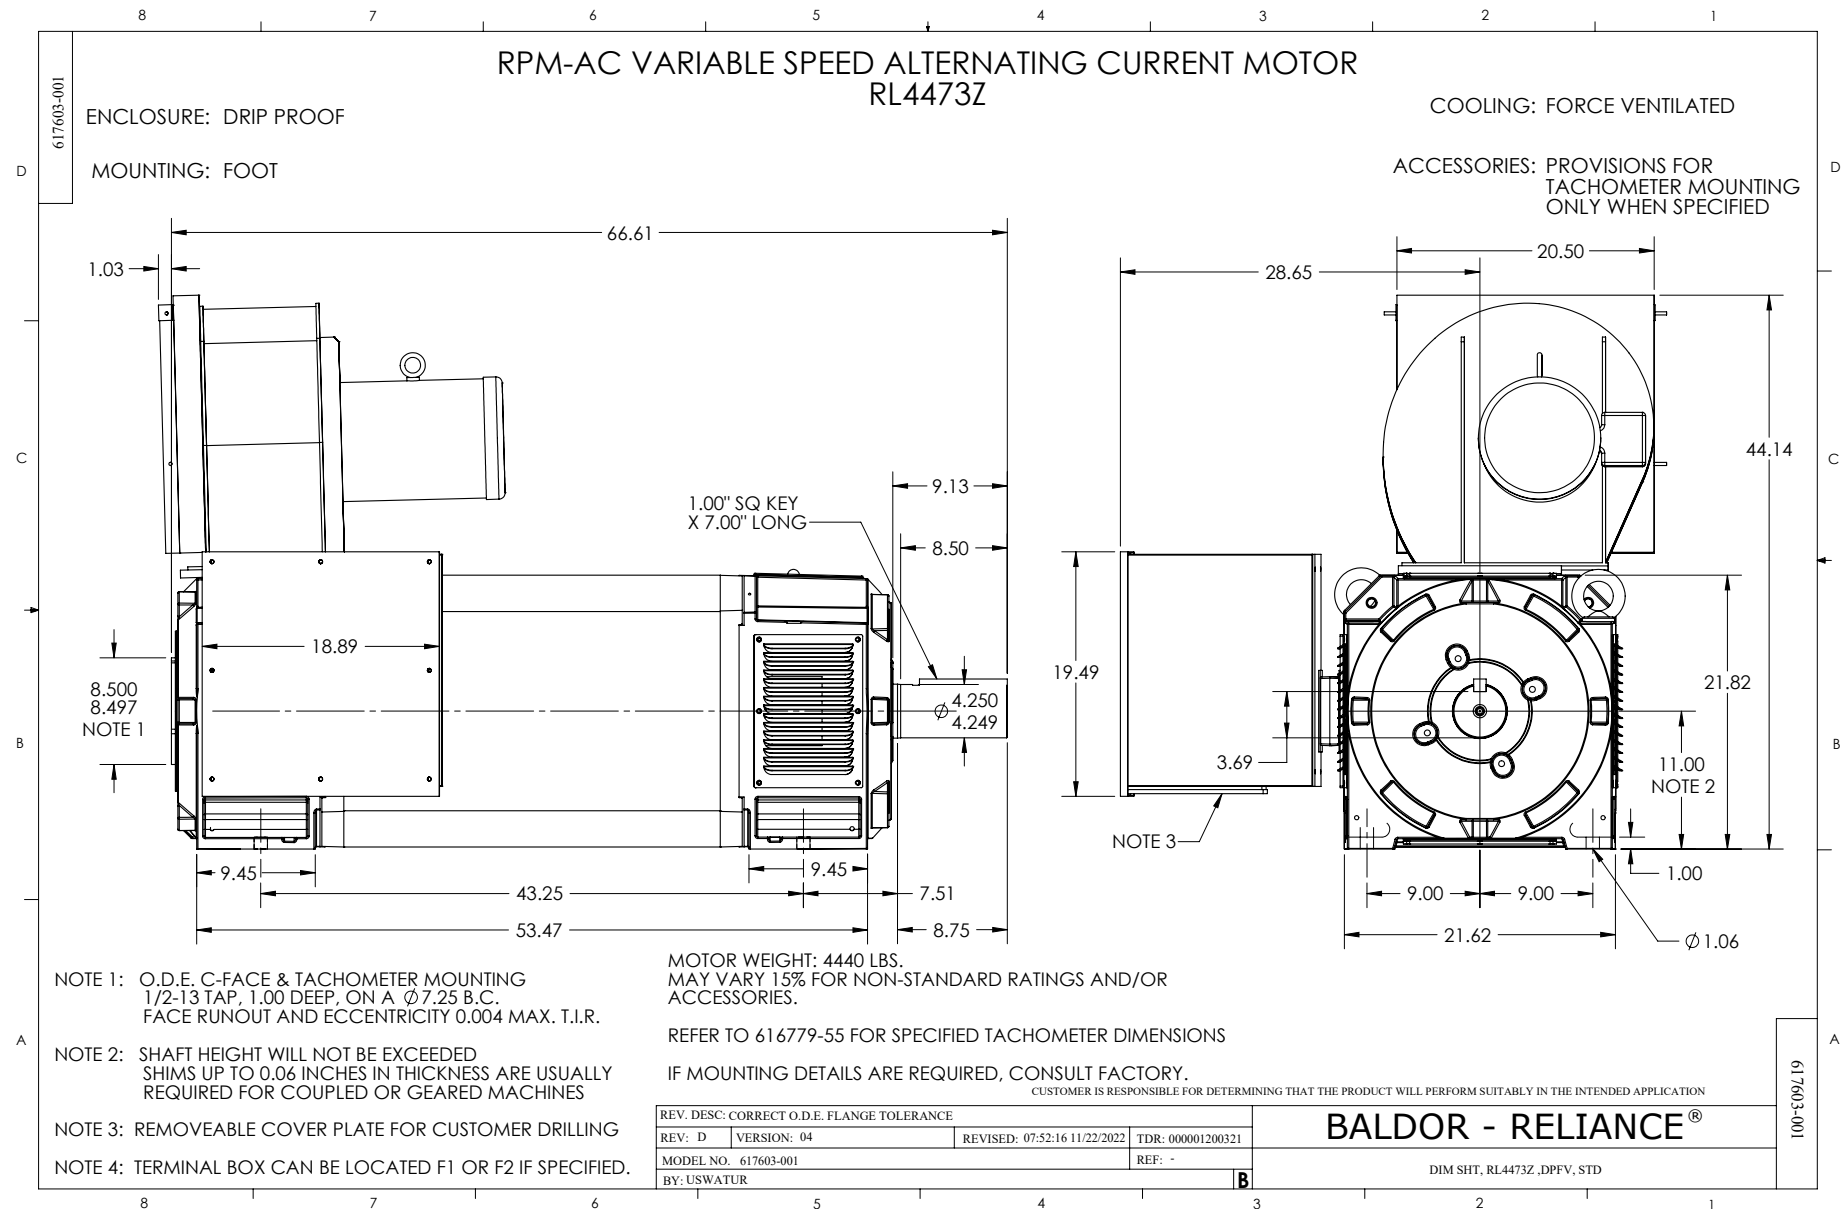

065564-004

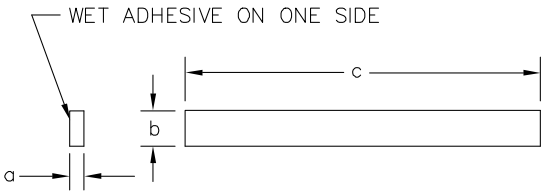

SYM	MAKE FROM	a	b	c	REMARKS
A	X	1/8	5/8	24*	TERMBX & CVR 180AT-250AT
B	X	1/8	5/8	37 1/2*	TERMBX & CVR 280AT-320AT
C	Y	1/4	5/8	44 1/2△	FILTER TO HOUSING GASKET
D	X	1/8	5/8	170"	TEAO HEAT EXCH.
E	Y	1/4	5/8	72"△	TERMBX & CVR

SYM	MAT'L SPEC	a	b	c
X	46024-XV	1/8	5/8	* 50' ROLL; WET ADHESIVE ON ONE SIDE
Y	46024-XV	1/4	5/8	* 50' ROLL; WET ADHESIVE ON ONE SIDE

△ RELIANCE WILL CUT AND MOUNT ON FILTER HOUSING PER ASSEMBLY DRAWING 603989-2.

* PROD. NOTE: WHEN ORDERING THRU PURCHASING ORDER AS 50 FT. ROLLS, WET ADHESIVE ON ONE SIDE. RELIANCE WILL CUT AND MOUNT ON COVER. PER INSTRUCTIONS ON COVER DRAWINGS.


CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT BALDOR'S PRODUCT WILL PERFORM SUITABLY IN THE INTENDED APPLICATION.

REV. DESC: CHANGE DESCRIPTION ON TITLE BLOCK		
REV. LTR: C	VERSION: 03	TDR: 000000571980
FILE: \RGG\00000\220	REVISED: 10:54:04 12/16/2010	BY: RGGWT
MTL: -		

BALDOR
GASKET,STRIP,CLOSED CELL NEOPRENE
SH 1 of 1

065564-004

422927-001

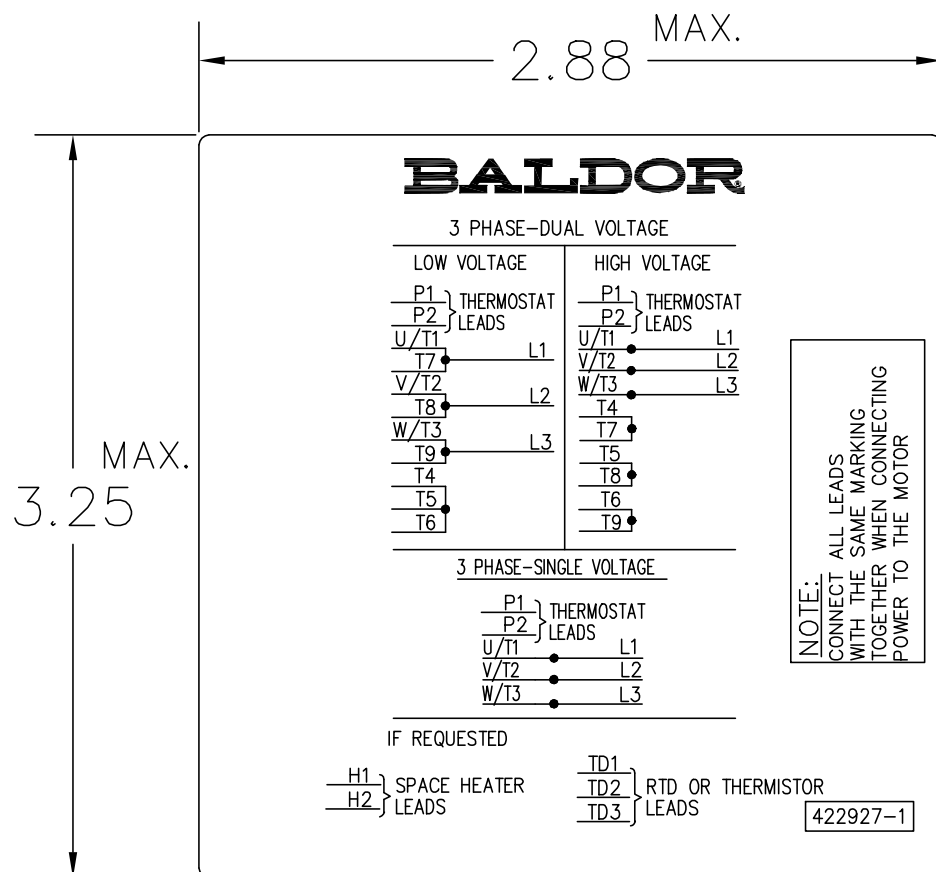

NOTE:
DATA TO BE SIZED
SO THAT IT FITS INTO
MATERIAL DECAL
DIMENSIONS. MAKE
LETTERS & NUMBERS
AS LARGE AS POSSIBLE.

MATERIAL: CERAMATIC DGF-P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS
AND LINES TO BE BLACK
ON WHITE BACKGROUND.

422927-001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE

REV. LTR: B

VERSION: 02

TDR: 000000788708

FILE: \RGG\00000\203

REVISED: 08:09:29 03/04/2013

MTL: -

BY: RGGWT

BALDOR

EXTERNAL CONNECTION LABEL

SH 1 of 1