



Customer information packet

IDDRPM448004

800HP, 1750, 460V, RL4440, DPFV, F1

Specifications

Enclosure	DPFV
Frame	RL4440Z
Frame Material	Exposed Laminations
Frequency	882.00 Hz
Output @ Frequency	800.000 HP @ 882 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 882 HZ
Voltage @ Frequency	460.0 V @ 882 HZ
Agency Approvals	CCSA US
Auxiliary Box	NO AUXILLARY BOX
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Current @ Voltage	1002.000 A @ 460.0 V
Duty Rating	CONT
Feedback Device	NO FEEDBACK
Frame Prefix	RL
Heater Indicator	No Heater
High Voltage Full Load Amps	1002.0 a
Insulation Class	H
Motor Standards	NEMA
Mounting Arrangement	F1
Overall Length	59.39 IN
Product Family	Extruder
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Service Factor	1.00
Shaft Diameter	4.250 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1750 rpm
Starting Method	Full Voltage
Thermal Device - Bearing	None

Part detail

Revision	A
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	L9464A
Layout	617600-001
Eff. date	03-23-2023
CD Diagram	422927-001
Poles	06
Leads	
Proprietary	False
Created date	02-03-2023

Thermal Device - Winding

Normally Closed Thermostat

Nameplate

000613006MY									
	DUTY	HP	RPM	AMPS	VOLTS	HZ			
	CONT	800	1750		1002	460		88.2	
	CONT	800	2625		945	460		132.3	
CAT.NO.	IDDRPM448004			SPEC. NO.	R44-A000-0223				
SER.NO				FR	RL4440Z	INSUL	H		
PH.	3	MAX SAFE SPEED			2700	AMB.	40	MIN. AMB.	-25
DESIGN NO.	L9464A			TYPE		ENCL.	DPG-FV		
S.F.	1.00			D.E. BRG.	110BC02J30X				
ENCL MOD				O.D.E. BRG.	6222/C3VL0241				
	IP23								

S/O	-	VOLTS	460	ENCLOSURE	DPFV	WYE CONN EQ CKT OHMS PER PHASE (AT BASE RATING, 25°C)		
FRAME	RL4440	AMPS	1002	MAX SAFE SPEED	2700			
HP	800	DUTY	CONT	IM (AMPS)	454	R1	.00210	X1 .0293
BASE SPEED	1750	S.F.	1.0	P.F. @NL / FL	.021/.789	R2	.00148	X2 .0411
PHASE/HZ	3/88.2	AMB.°C / INSUL	40H	WK² (Lb-Ft²)	169			X3 .583

RATED FULL LOAD DATA

	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
BASE SPEED	1751	800	2400	460	88.2	1003
MAX SPEED	2625	801	1601	460	132.3	945
MIN SPEED	0	0	2400	6.14	.6540	1003


LOAD PERFORMANCE AT BASE SPEED

	RPM	HP	TORQUE Lb-FT	FUND VOLTS	FREQ-HZ	AMPS
NO LOAD	1764	0	0	460	88.2	445
1/4	1761	200	597	460	88.2	507
1/2	1758	401	1197	460	88.2	639
3/4	1754	601	1798	460	88.2	809
FULL LOAD	1751	800	2400	460	88.2	1003
0/L	1734	1585	4800	460	88.2	1936

REMARKS:
TYPICAL DATA
CORRELATED DATA


	DRAWN BY: A. BROOKINS CHECKED BY: R. GARCIA APPROVED BY: J. MARTIN DATE: 3-17-23	AC MOTOR PERFORMANCE DATA	L9464A ISSUE DATE 3-17-23
---	---	---------------------------------	------------------------------

USANBR028

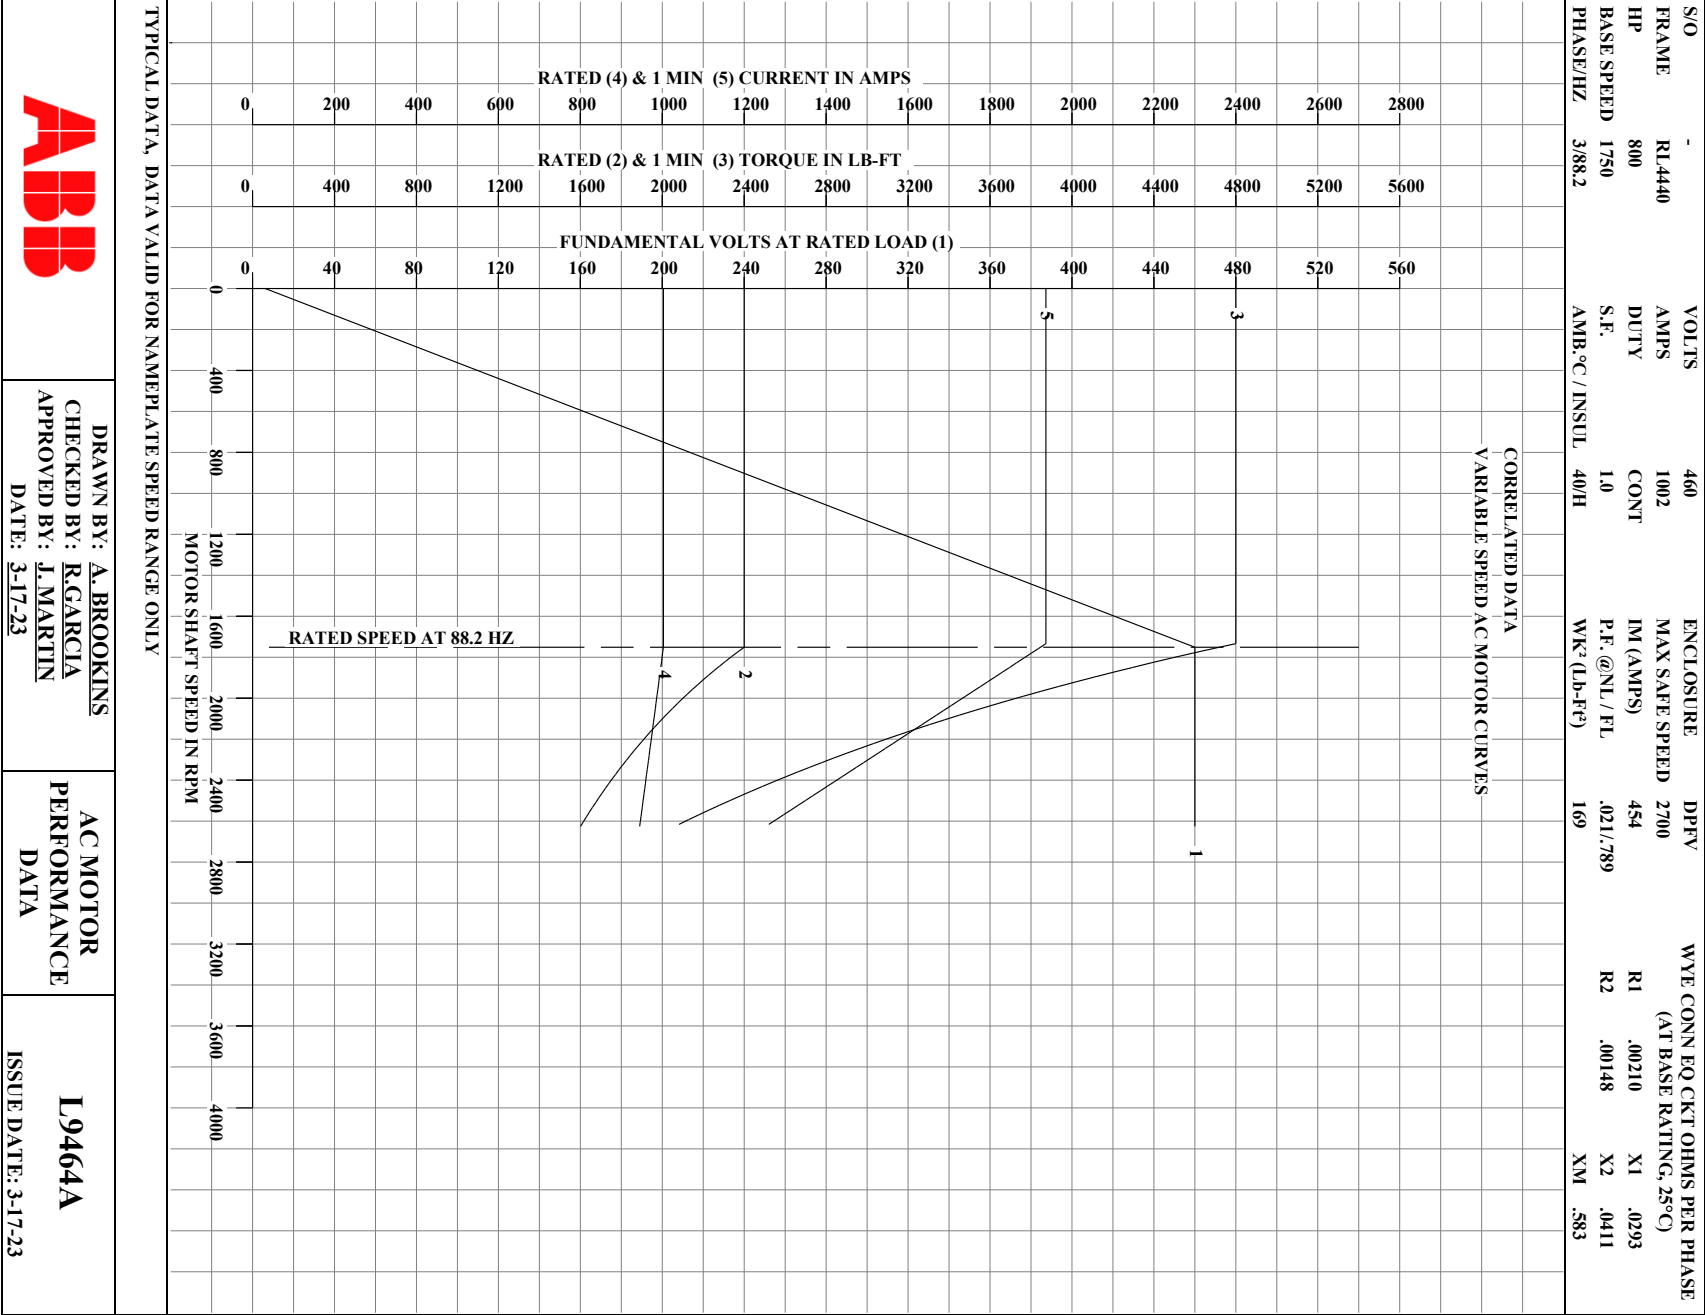


Printed on 03/17/2023 10:01 AM


USANBR028

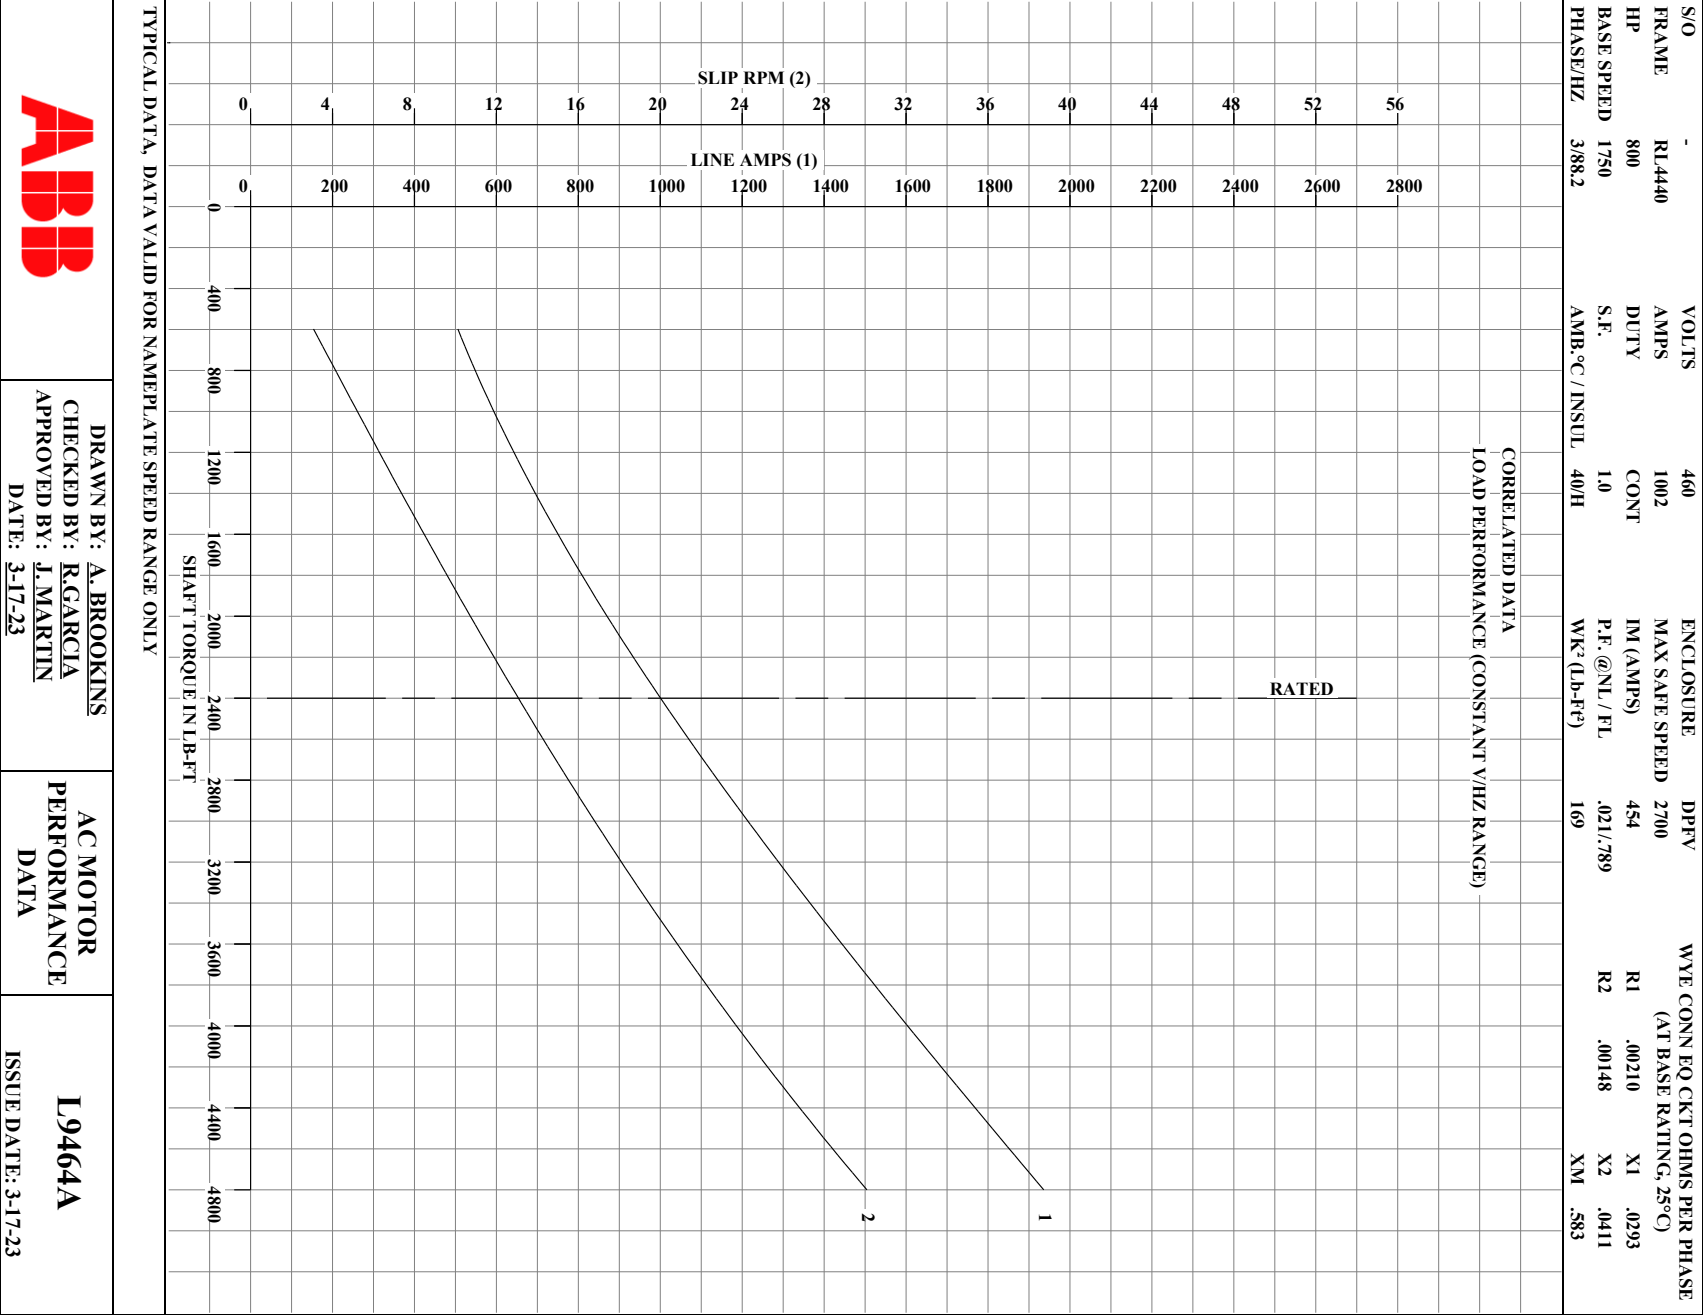

Printed on 03/17/2023 10:01 AM

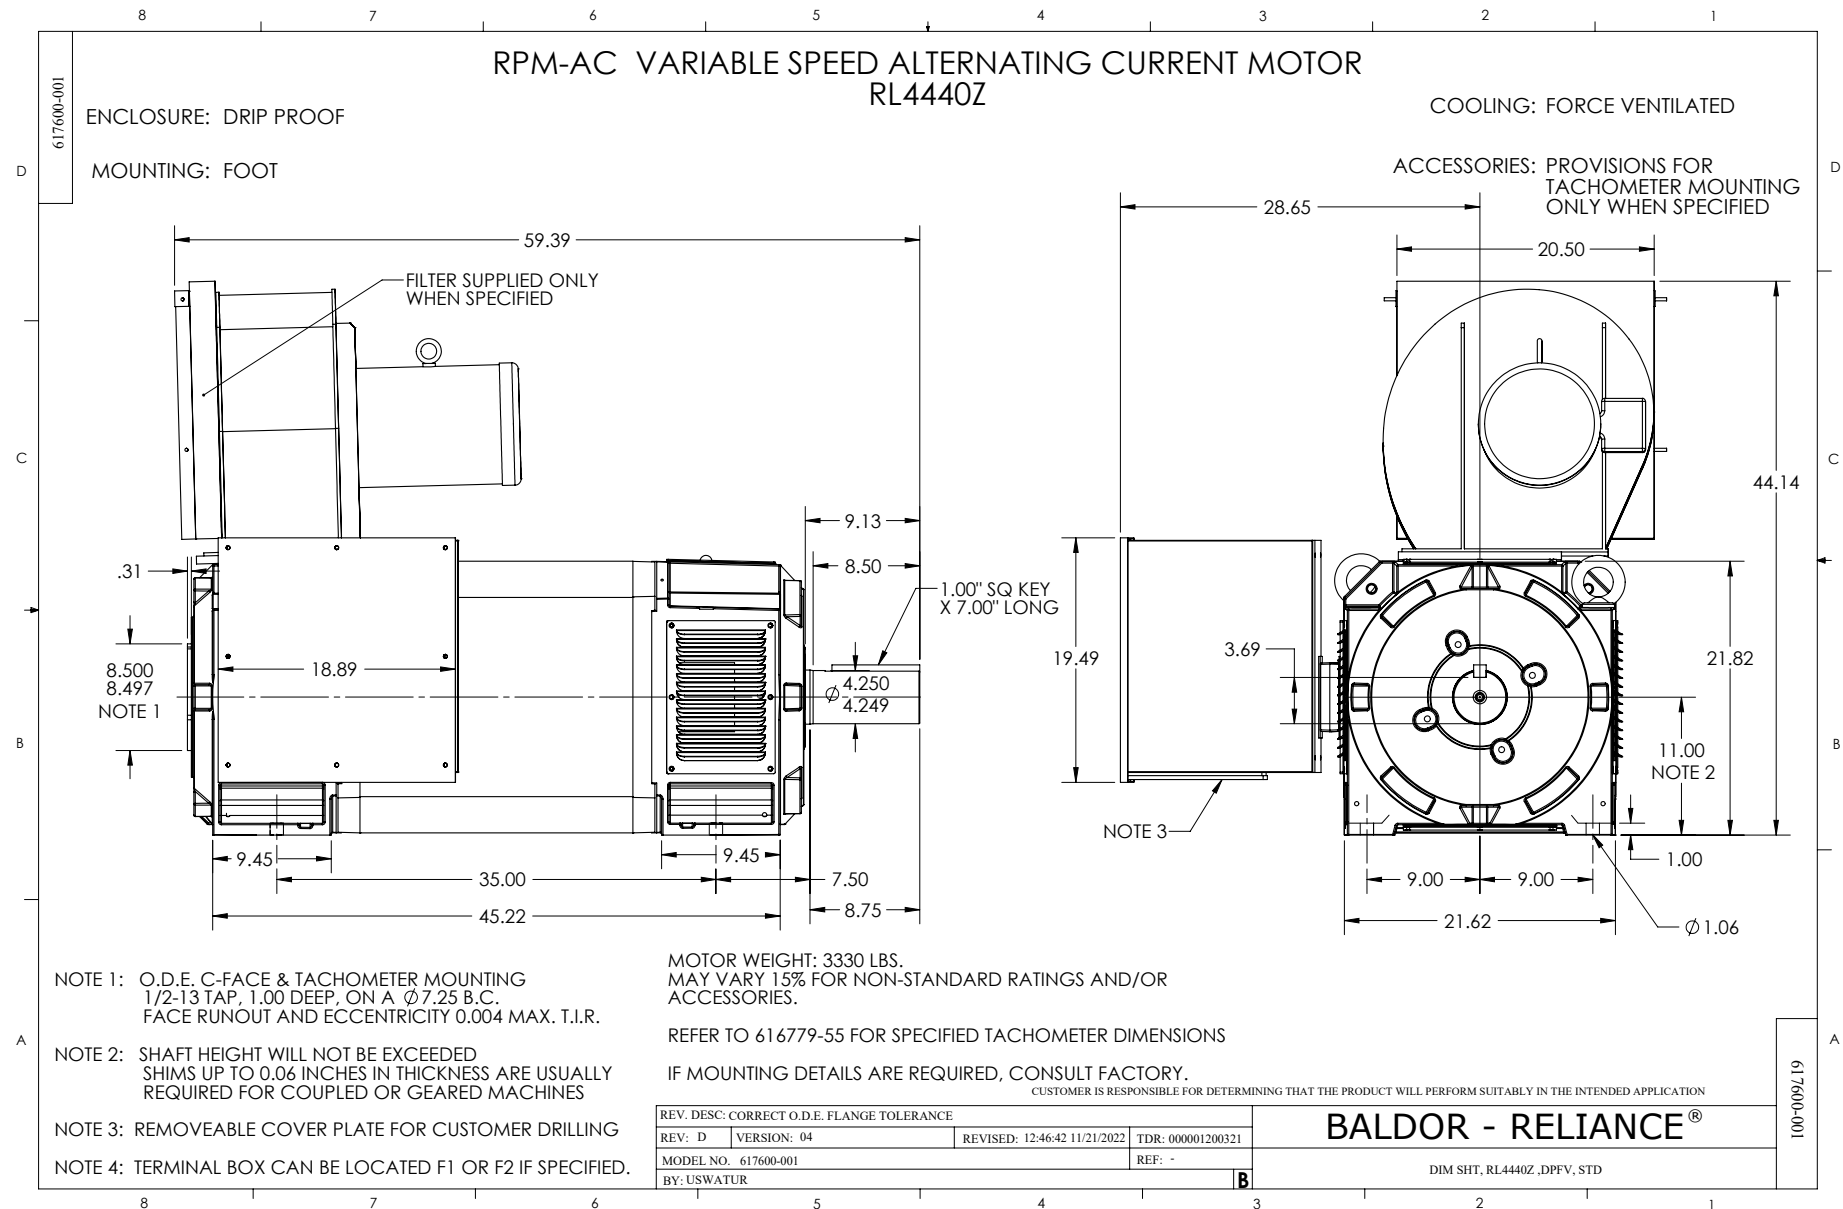

422927-001

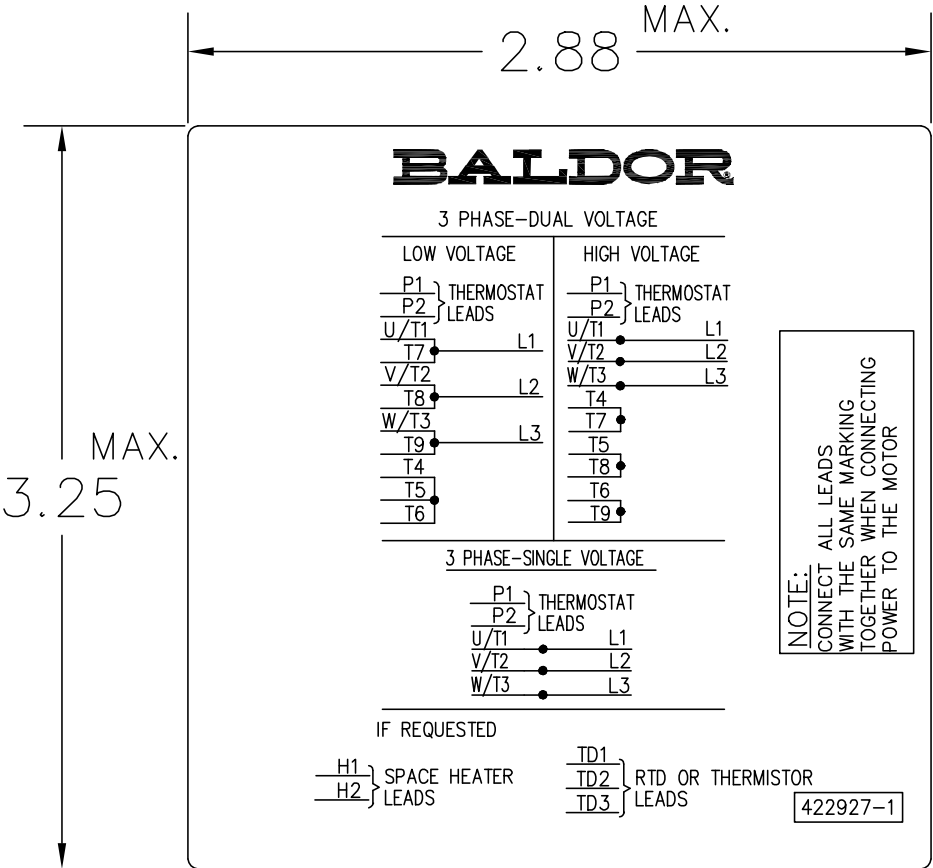

NOTE:
DATA TO BE SIZED
SO THAT IT FITS INTO
MATERIAL DECAL
DIMENSIONS. MAKE
LETTERS & NUMBERS
AS LARGE AS POSSIBLE.

MATERIAL: CERAMATIC DGF-P4
PERMA GRIP ADHESIVE

ALL LETTERS, NUMBERS
AND LINES TO BE BLACK
ON WHITE BACKGROUND.

422927-001

REV. DESC: CHANGE BACKGROUND COLOR FROM GOLD TO WHITE		
REV. LTR: B	VERSION: 02	TDR: 000000788708
FILE: \RGG\00000\203	REVISED: 08:09:29 03/04/2013	
MTL: -	BY: RGGWT	

BALDOR

EXTERNAL CONNECTION LABEL

SH 1 of 1