



Customer information packet

IDM3661T-5

3HP, 1755RPM, 3PH, 60HZ, 184TC, 0632M, TEBC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEBC
Frame	184TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	115V 1-Phase EXT
Current @ Voltage	3.300 A @ 575.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Encoder/Feedback Device
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	3.3 a
Insulation Class	H
Inverter Code	Inverter Duty

Part detail

Revision	J
Type	AC
Mech. spec.	06F552
Base	
Status	PRD/A
Elec. spec.	06WGX319
Layout	06LYF552
Eff. date	09-30-2025
CD Diagram	CD0006
Poles	04
Leads	3#16
Proprietary	False
Created date	10-10-2011

KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	6000 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0632M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	21.71 IN
Power Factor	77
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible: Connected Standard
Shaft Slinger Indicator	No Slinger
Speed	1755 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4009L											
CAT.NO.	IDM3661T-5										
SPEC.	06F552X319G1										
FRAME	184TC			H.P.	3 TE						
VOLTS	575										
MAG. CUR.	1.7				F.L. AMPS			3.3			
R.P.M.	1755			R.P.M. MAX			6000				
HZ.	60		PH.	3		CLASS	H				
SER.F.	1.00		DES.	B		SL HZ	1.5				
NEMA NOM. EFF.	89.5		WK2	0.3							
BLOWER		V	115		PH	1	HZ	60	AMPS	.26	
RATING	40C AMB-CONT										
DE	6206		ODE	6205							
CC	010A		SN								
	1000:1 CT/VT										



AC Induction Motor Performance Data
 Record # 36484
 Typical performance - not guaranteed values

Winding: 06WGX319	Type: 0632M	Enclosure: TEBC
--------------------------	--------------------	------------------------

Nameplate Data			General Characteristics at 575 V, 60 Hz: Single Volt Motor			
Rated Output (HP)	3		Full Load Torque	9.05 LB-FT		
Volts	575		Start Configuration	DOL		
Full Load Amps	3.3		Break Down Torque	33 LB-FT		
R.P.M.	1755		Pull-Up Torque	18.2 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque	20.3 LB-FT	
NEMA Design Code	B	KV/A Code	J	Starting Current	23.8 Amps	
Service Factor	1			No-load Current	1.7 Amps	
NEMA Nom. Eff.	89.5	P.F.	77	Line-line Res. @ 25°C.	6.22 Ohms	
Rating - Duty	40C AMB-CONT			Temp. Rise @ Rated Load	35°C	
S.F. Amps				Temp. Rise @ S.F. Load		



Load Characteristics at 575 Volts, 60 Hz, 3 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	38	59	71	77	81	83	
Efficiency	83.1	88.4	89.8	89.6	89.1	87.7	
Speed	1790	1779	1769	1757	1744	1730	
Line Amperes	1.86	2.22	2.71	3.27	3.92	4.69	

Baldor Electric Company Fort Smith, Arkansas



Catalog	IDM3661T-5	NP VOLTS	575	ENCLOSURE	TEBC	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)		
FRAME	184TC	NP AMPS	3.3	Base Volts	575	R1	3.040	X1
HP	3 HP	DUTY	Cont	Base AMPS	3.27	R2	2.150	X2
BASE SPEED	1800	MAX SAFE RPM	6000	Slip Hz	1.43			XM
PHASE/HZ	3/60	AMB ⁸ C/INSUL	40/H	WK ² (lb-ft ²)	0.298			187.435

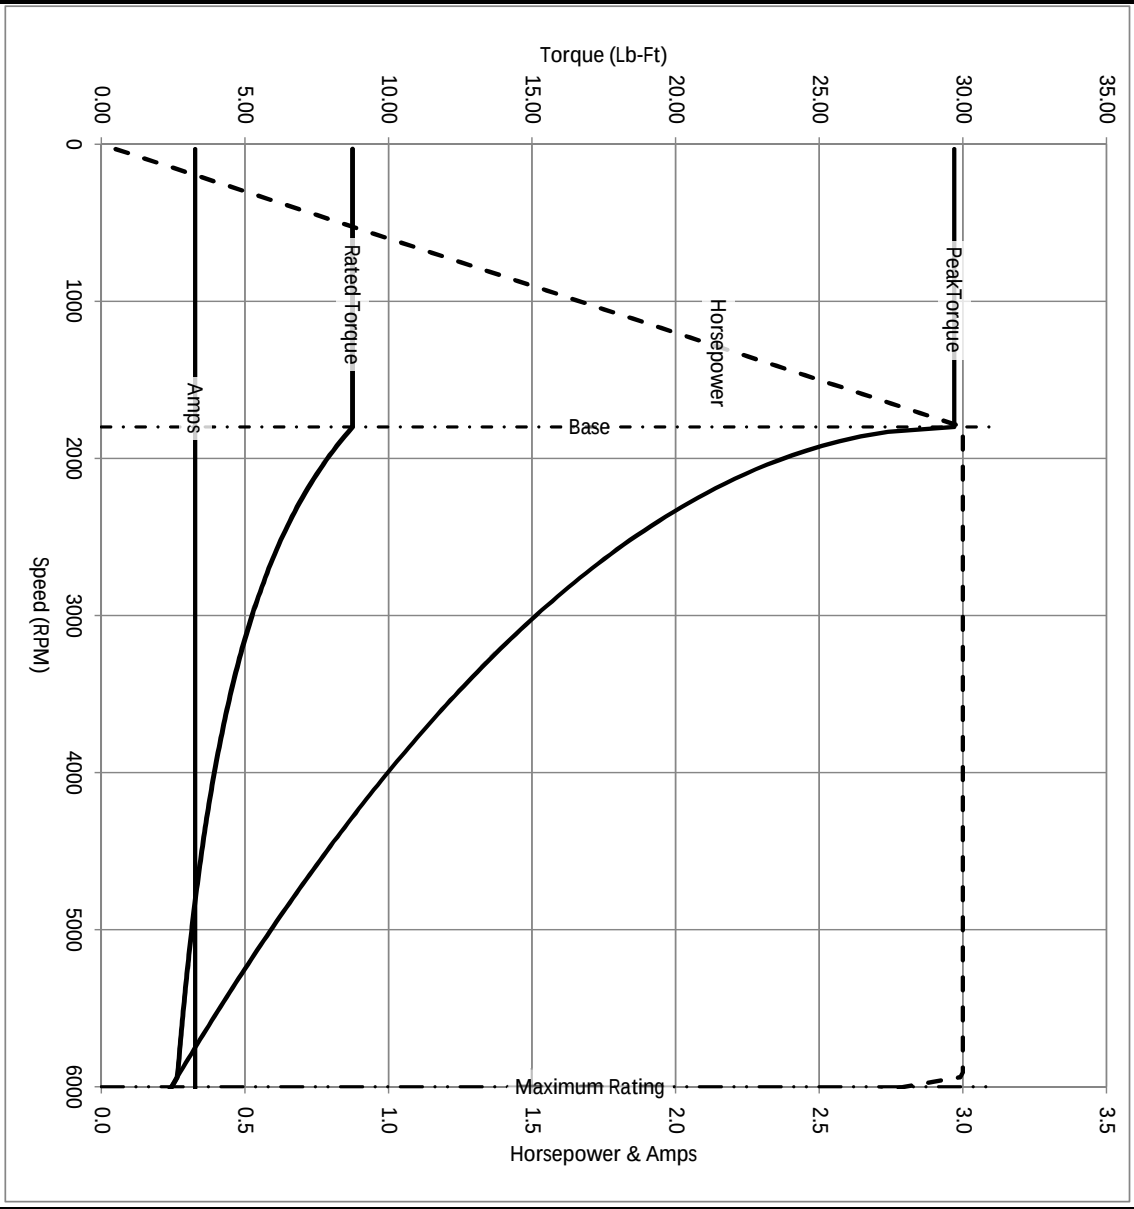

Remarks: Calculated Data

A MEMBER OF THE ABB GROUP

DR BY ENR

CK BY

APP BY ENR


DATE 2/27/2013

A-C MOTOR




PERFORMANCE CURVES

06F552X319G1

ISSUE DATE 2/27/2013

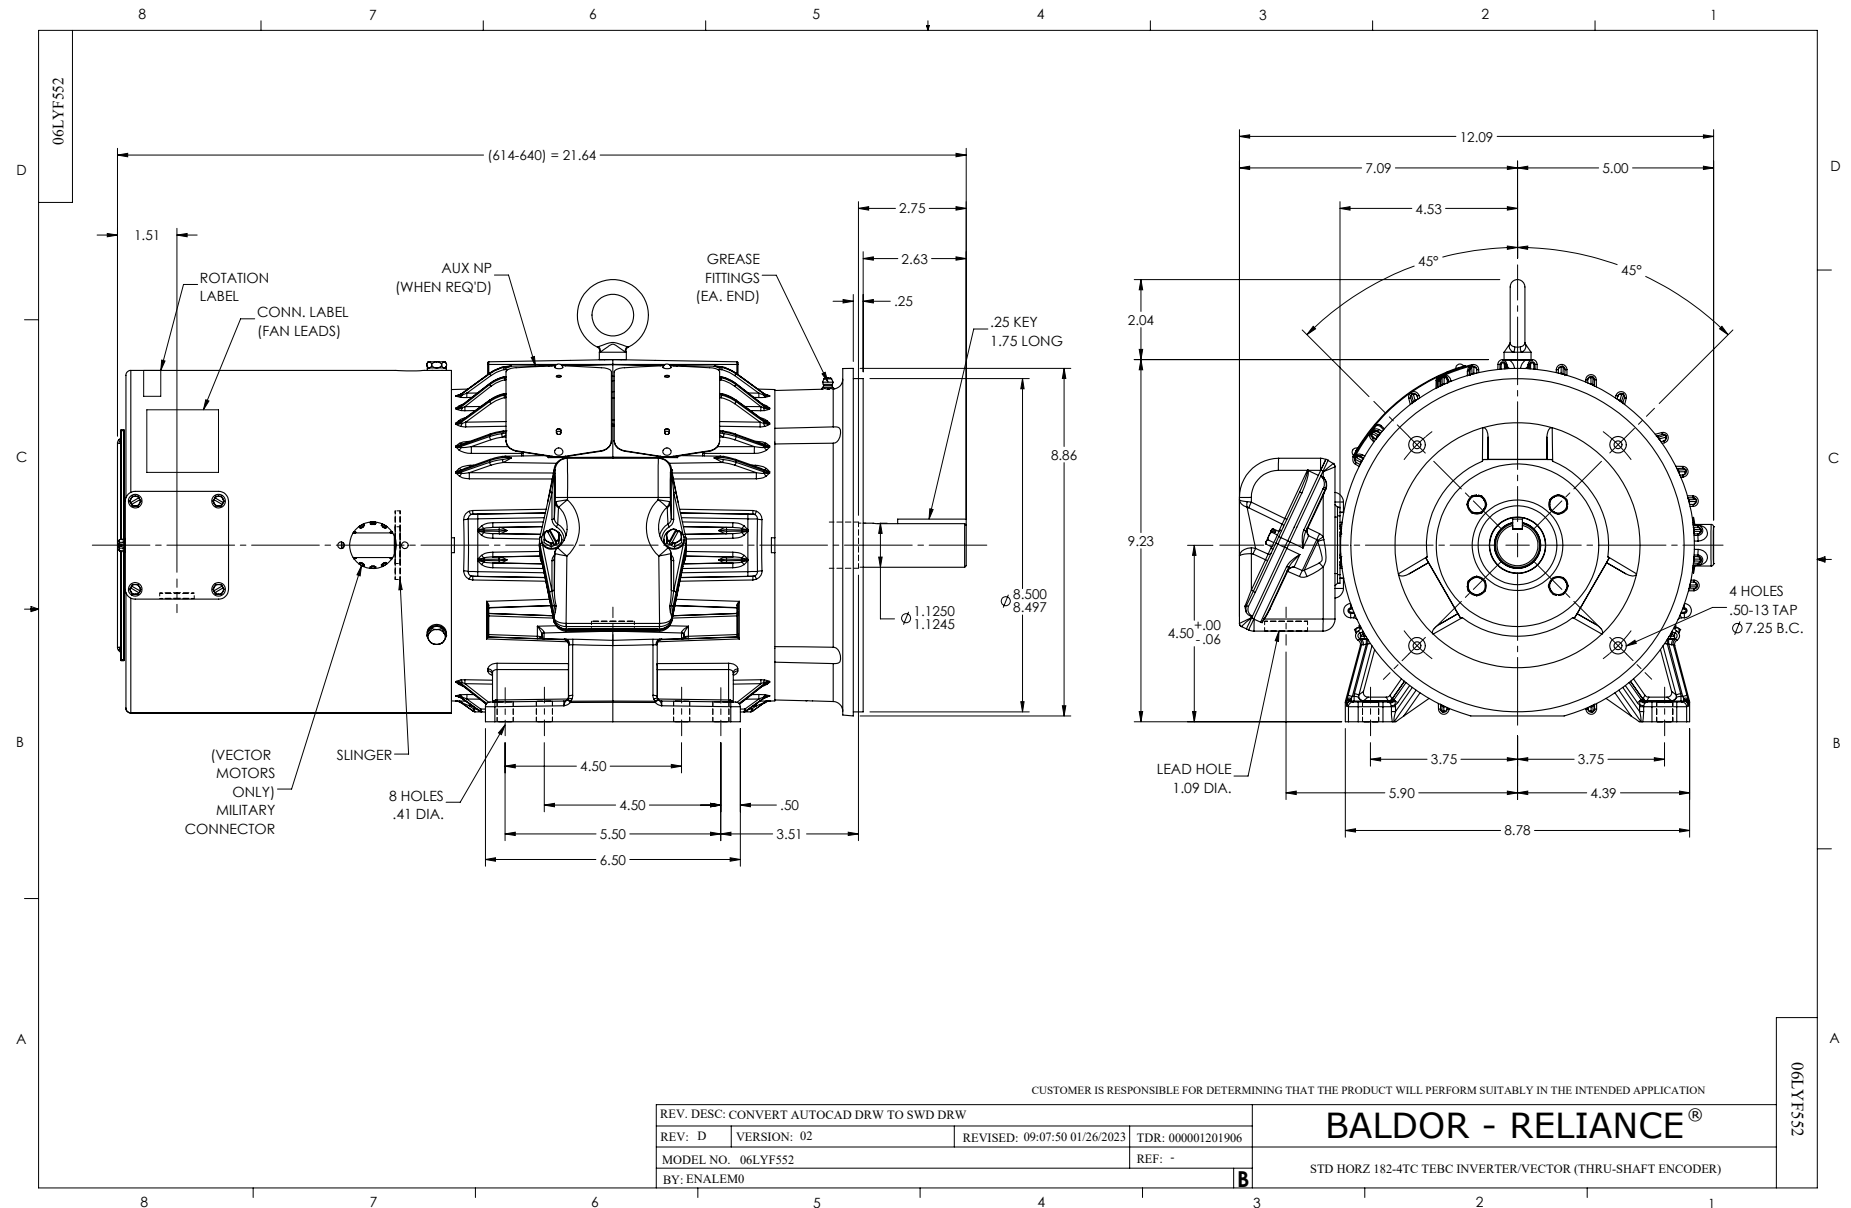

CD0006

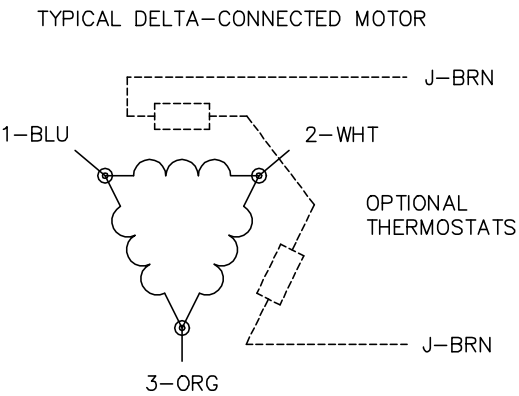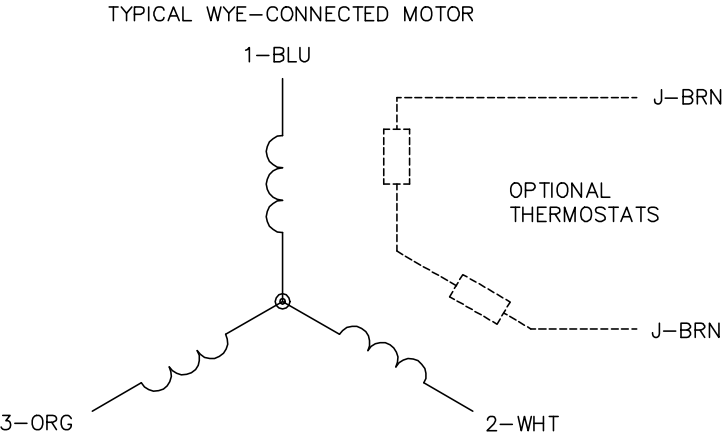

- NOTES:
- 1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
 - 2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
 - 5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007		
REV. LTR: E	VERSION: 01	TDR: 000001099922
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO
MTL: —		

BALDOR - RELIANCE®

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

SH 1 of 1