



Customer information packet

IDM3768T

48M 6P TEBC HOR 215TC T'STATS INVERTER

Class - None

Division - Not Applicable

Specifications

Enclosure	TEBC
Frame	215TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	BLOWER
Current @ Voltage	14.600 A @ 230.0 V 7.300 A @ 460.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	90.2 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	7.3 a
Insulation Class	H

Part detail

Revision	F
Type	AC
Mech. spec.	07D515
Base	
Status	PRD/A
Elec. spec.	07WGX823
Layout	07LYD515
Eff. date	09-30-2025
CD Diagram	CD0005
Poles	06
Leads	9#14
Proprietary	False
Created date	03-18-2019

Inverter Code	Inverter Duty
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2000 rpm
Motor Lead Quantity/Wire Size	9 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0748M
Mounting Arrangement	F1
Number of Poles	6
Overall Length	25.58 IN
Power Factor	72
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible: Connected Standard
Shaft Slinger Indicator	No Slinger
Speed	1160 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP4009L									
CAT.NO.	IDM3768T								
SPEC.	07D515X823G1								
FRAME	215TC			H.P.	5 TE				
VOLTS	230/460								
MAG. CUR.	7.4/3.7				F.L. AMPS		14.6/7.3		
R.P.M.	1160			R.P.M. MAX		2000			
HZ.	60		PH.	3	CLASS		H		
SER.F.	1.00		DES.	A		SL HZ		2	
NEMA NOM. EFF.	90.2		WK2	1.19					
BLOWER		V		PH			HZ		AMPS
RATING	40C AMB-CONT								
DE	6307		ODE	6206					
CC	010A	SN							
	1000:1 CT/VT								

NP VOLTS	230/460	Base Volt	460	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	14.6/7.3	NL AMPS	3.70	R1	0.000	X1	0.000
HP	5	Slip (HZ)	1.85	R2	0.000	X2	0.000
BASE SPEED	1163	WK ² (lb-ft ²)	1.190			XM	0.000
PHASE/HZ	3/60						

Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1163	5.1	22.8	460	60	7.3
Max Speed	1741	5.0	15.2	460	90	6.8
CT Min Speed	1.163	0.005	22.8	0.46	0.06	7.3

Load Performance at Base Speed

	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1199	0.0	0.0	460	60	3.7
1/4	1190	1.3	5.6	460	60	4.0
1/2	1181	2.5	11.0	460	60	4.8
3/4	1173	3.7	16.7	460	60	5.9
Full Load	1163	5.1	22.8	460	60	7.3
O/L	1095	10.1	48.4	460	60	16.1


Blower Data	Volts	Ph/Hz	FL Amps	L R Amps	Frame	CFM

Remarks: Calculated Data

DR BY USBRRANI				A-C MOTOR		07WGx823
CK BY CD				PERFORMANCE		
APP BY USBRRANI				CURVES		
DATE 11/5/2024				Record: 36499		



NP VOLTS	230/460	Base Volt	460	WYE CONN EQ. CKT OHMS PER PHASE (BASE RATING, 20C)		
NP AMPS	14.6/7.3	NL AMPS	3.70	R1	0.000	X1 0.000
HP	5	Slip (Hz)	1.85	R2	0.000	X2 0.000
BASE SPEED	1163	WK ² (lb-ft ²)	1.190			XM 0.000
PHASE/HZ	3/60					

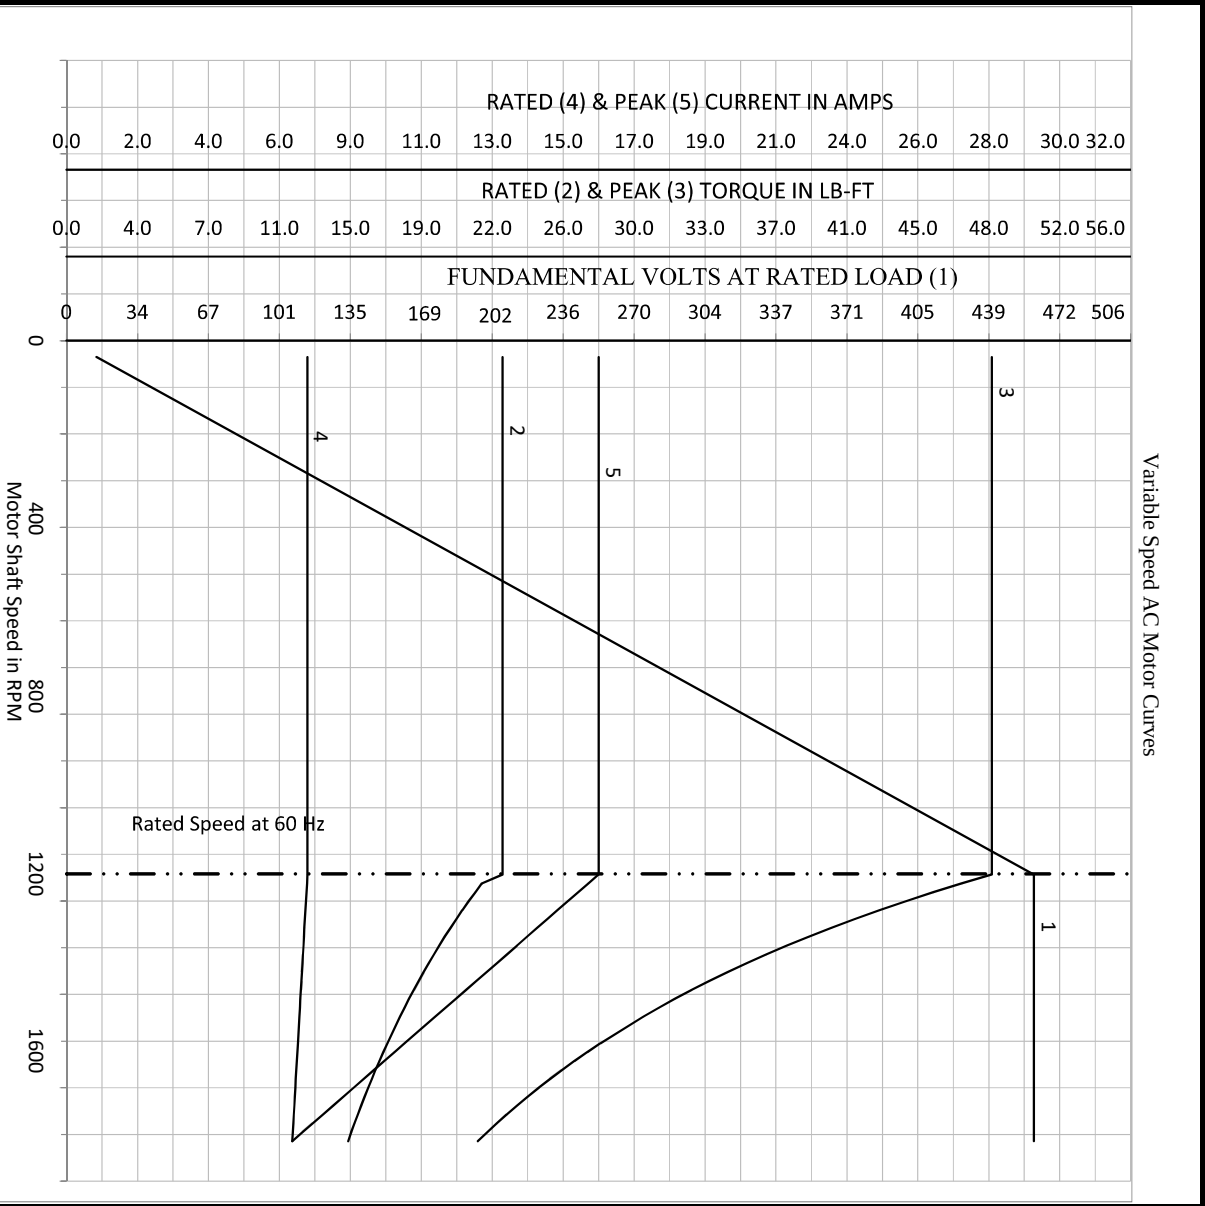

Calculated Data
Data Valid For Nameplate Speed Range only

BALDOR • RELIANCE


DR BY USBRRANI
CK BY CD
APP BY USBRRANI
DATE 11/5/2024

**A-C MOTOR
PERFORMANCE
CURVES**

07WGX823
Record: 36499

NP VOLTS	230/460	0	0	WYE CONN. EQ. CKT. OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	14.6/7.3	Base Volt	460	R1	0.000	X1	0.000
HP	5	NL AMPS	3.70	R2	0.000	X2	0.000
BASE SPEED	1163	Slip (HZ)	1.85	XM			
PHASE/HZ	3/60	WK2 (lb-ft/2)	1.190				

Vector PWM Inverter Duty
Variable Speed AC Motor Curves

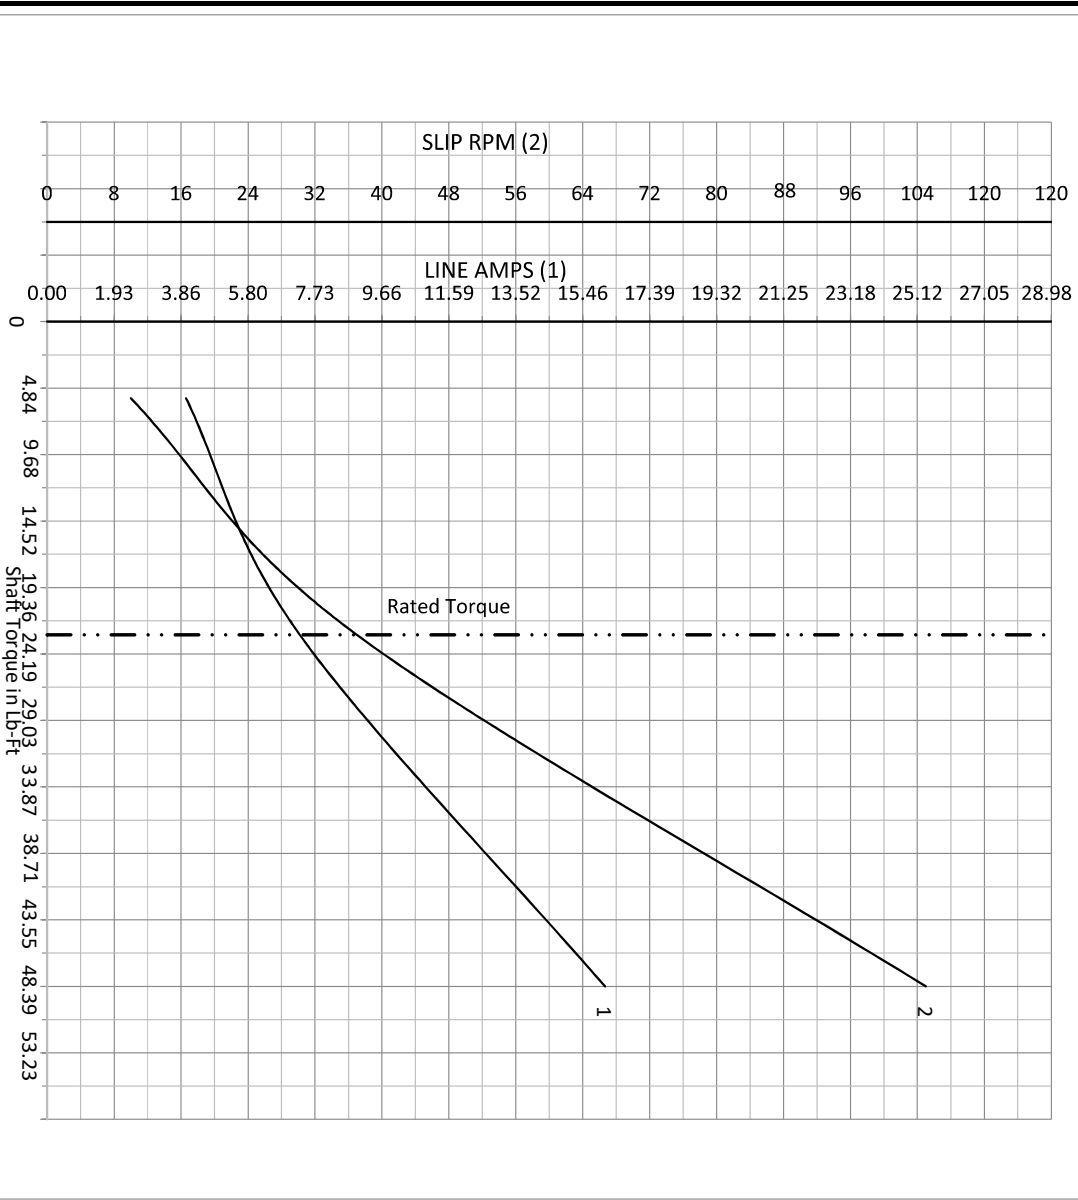

Calculated Data
Data Valid For Nameplate Speed Range only

BALDOR • RELIANCE	DR BY <u>USBRANI</u>	A-C MOTOR	07WGX823
	CK BY <u>CD</u>	PERFORMANCE	
	APP BY <u>USBRANI</u>	CURVES	
	DATE <u>11/5/2024</u>		Record: 36499

