



Customer information packet

IDNM3661T

3HP, 1760RPM, 3PH, 60HZ, 184TC, 0636M, TENV, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TENV
Frame	184TC
Frame Material	Iron
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.300 A @ 460.0 V 8.600 A @ 230.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Encoder/Feedback Device
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.3 a

Part detail

Revision	F
Type	AC
Mech. spec.	06F551
Base	
Status	PRD/A
Elec. spec.	06WGX370
Layout	06LYF551
Eff. date	09-30-2025
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	04-03-2017

Insulation Class	H
Inverter Code	Inverter Duty
KVA Code	L
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	6000 rpm
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0636M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	17.21 IN
Power Factor	73
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1760 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2

None

Nameplate

NP4009L									
CAT.NO.	IDNM3661T								
SPEC.	06F551X370G2								
FRAME	184TC		H.P.	3 TE					
VOLTS	230/460								
MAG. CUR.	4.8/2.4			F.L. AMPS			8.6/4.3		
R.P.M.	1760		R.P.M. MAX			6000			
HZ.	60		PH.	3	CLASS	H			
SER.F.	1.00		DES.	A	SL HZ	1.2			
NEMA NOM. EFF.	89.5		WK2	0.372					
BLOWER		V		PH		HZ		AMPS	
RATING	40C AMB-CONT								
DE	6206	ODE	6205						
CC	010A	SN							
	1000:1 CT/VT								

NP VOLTS	230/460	WYE CONN EQ CKT OHMS PER PHASE (BASE RATING, 200C)						
NP AMPS	8.6/4.3	Base Volt	460	R1	1.890	X1	5.040	
HP	3	NL AMPS	2.45	R2	1.340	X2	4.290	
BASE SPEED	1765	Slip (HZ)	1.17	XM				113.000
PHASE/HZ	3/60	WK ² (lb-ft ²)	0.335					

Rated Full Load Data

	RPM	HP	Torque	Volts	Freq-Hz	Amps
Base Speed	1765	3.0	9.0	460	60	4.3
Max Speed	3528	3.0	4.5	460	120	3.8
CT Min Speed	1.765	0.003	9.0	0.46	0.06	4.3

Load Performance at Base Speed


	RPM	HP	Torque	Volts	Freq-Hz	Amps
No Load	1799	0.0	0.0	460	60	2.5
1/4	1791	0.8	2.3	460	60	2.7
1/2	1783	1.5	4.5	460	60	3.0
3/4	1774	2.3	6.7	460	60	3.6
Full Load	1765	3.0	9.0	460	60	4.3
O/L	1765	3.0	9.0	460	60	4.3

Blower Data	Volts	Ph/Hz	FL Amps	L/R Amps	Frame	CFM

Remarks: Calculated Data

BALDOR • RELIANCE				A-C MOTOR PERFORMANCE CURVES		06WGx370
DR BY	USJJON	CK BY	CD			
APP BY	USJJON	DATE	11/1/2024			
				Record: 66036		

NP VOLTS	230/460	WYE CONN EQ. CRT OHMS PER PHASE (BASE RATING, 20C)		
NP AMPS	8.6/4.3	R1	1.890	X1 5.040
HP	3	R2	1.340	X2 4.290
BASE SPEED	1765			XM 113.000
PHASE/HZ	3/60			
Base Volt	460			
NL AMPS	2.45			
Slip (Hz)	1.17			
WK ² (lb-ft ²)	0.335			

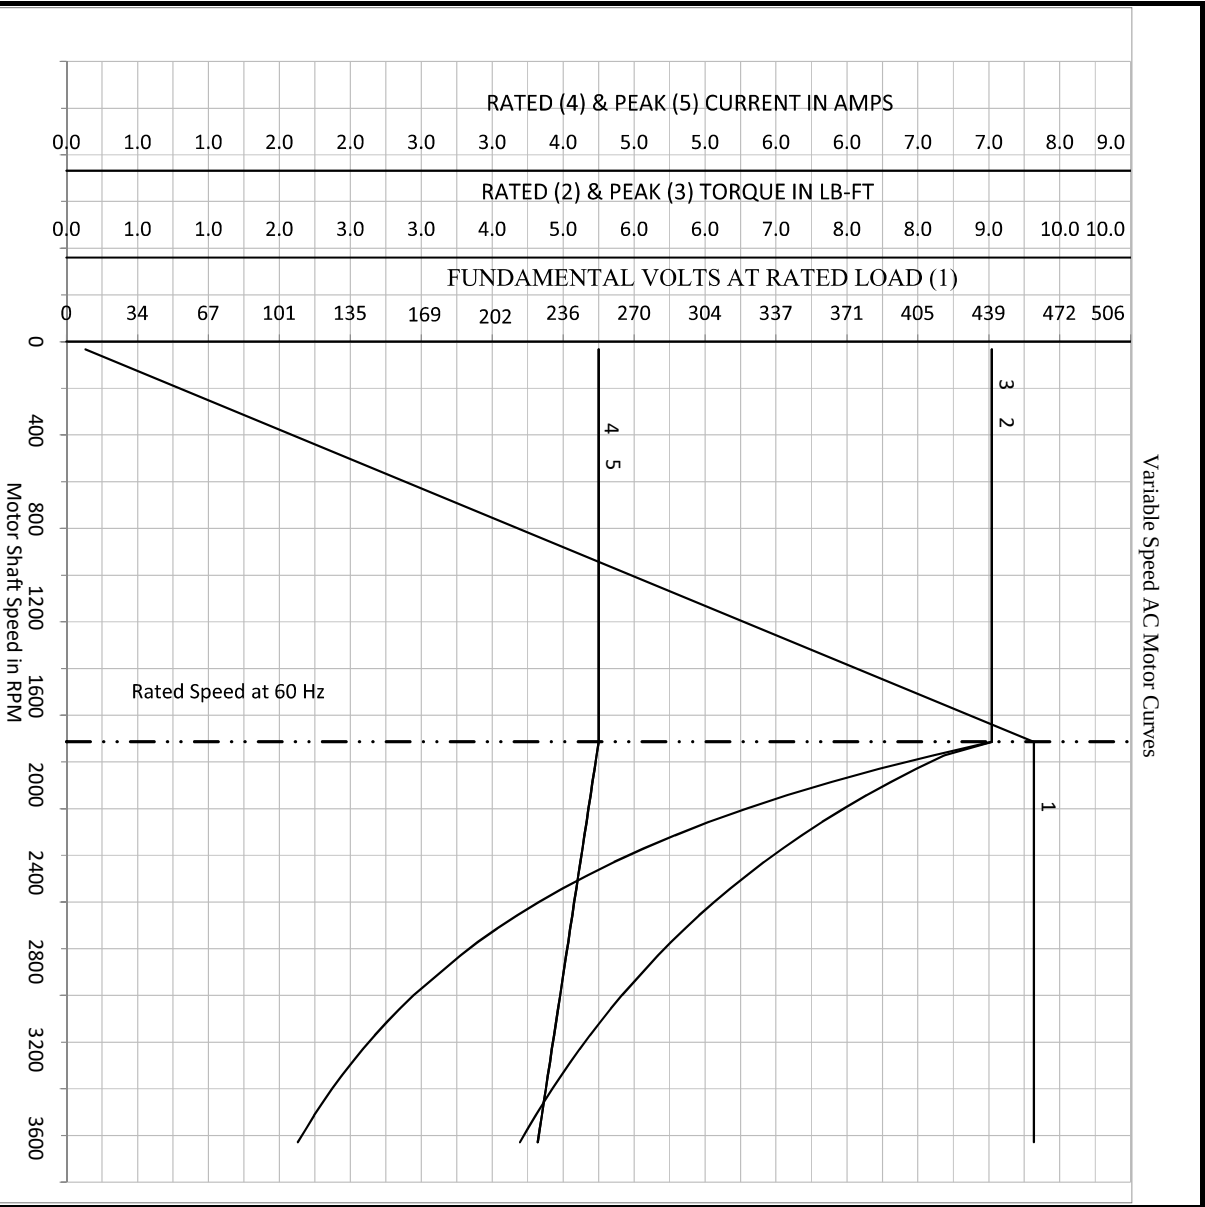


Calculated Data
Data Valid For Nameplate Speed Range only

BALDOR • RELIANCE		DR BY	USJION	A-C MOTOR	06WG370
		CK BY	CD	PERFORMANCE	
		APP BY	USJION	CURVES	
		DATE	11/1/2024		Record: 66036

NP VOLTS	230/460	0	0	WYE CONN. EQ. CKT OHMS PER PHASE (BASE RATING, 20C)			
NP AMPS	8.6/4.3	Base Volt	460	R1	1.890	X1	5.040
HP	3	NL AMPS	2.45	R2	1.340	X2	4.290
BASE SPEED	1765	Slip (HZ)	1.17	XM			
PHASE/HZ	3/60	Wk2 (lb-ft2)	0.335	113.000			

Vector PWM Inverter Duty
Variable Speed AC Motor Curves

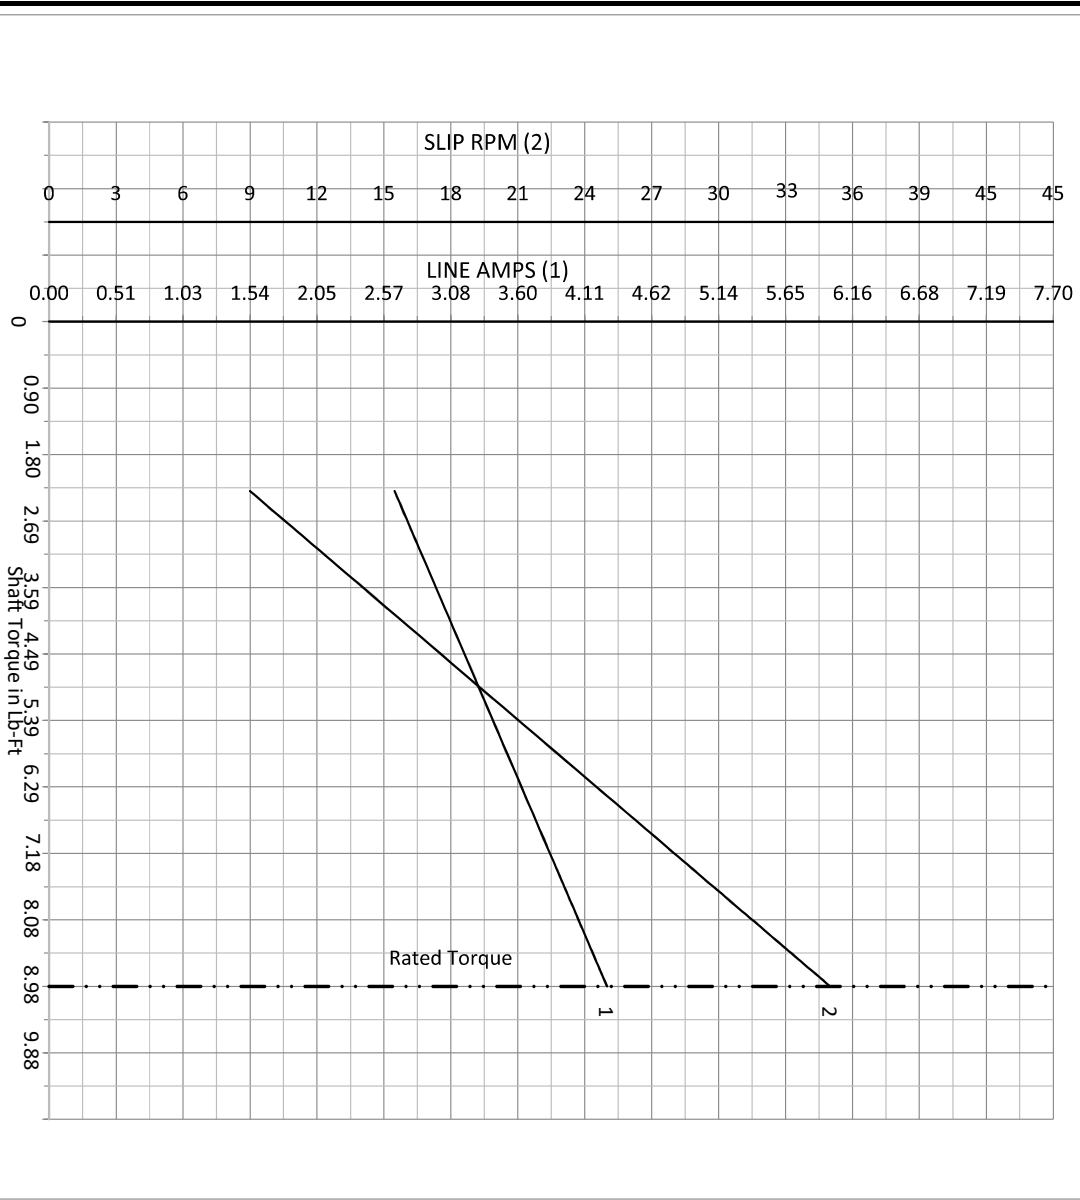

Calculated Data

Data Valid For Nameplate Speed Range only



DR BY USJION
CK BY CD
APP BY USJION
DATE 11/1/2024

A-C MOTOR
PERFORMANCE
CURVES
06WG370
Record: 66036

