



---

# Customer information packet

## IDVSNM3665T

5HP, 1750RPM, 3PH, 60HZ, 184TC, 0642M, TENV, F1

Class - None

Division - Not Applicable

## Specifications

|                                |                                         |
|--------------------------------|-----------------------------------------|
| Enclosure                      | TENV                                    |
| Frame                          | 184TC                                   |
| Frame Material                 | Iron                                    |
| Frequency                      | 60.00 Hz                                |
| Haz Area Class and Group       | None                                    |
| Haz Area Division              | Not Applicable                          |
| Motor Letter Type              | Three Phase                             |
| Output @ Frequency             | 5.000 HP @ 60 HZ                        |
| Phase                          | 3                                       |
| Synchronous Speed @ Frequency  | 1800 RPM @ 60 HZ                        |
| Voltage @ Frequency            | 230.0 V @ 60 HZ<br>460.0 V @ 60 HZ      |
| Agency Approvals               | UR<br>CSA                               |
| Ambient Temperature            | 40 °C                                   |
| Auxiliary Box                  | NO AUXILLARY BOX                        |
| Auxiliary Box Lead Termination | None                                    |
| Base Indicator                 | Rigid                                   |
| Bearing Grease Type            | Polyrex EM (-20F +300F)                 |
| Blower                         | None                                    |
| Current @ Voltage              | 13.200 A @ 230.0 V<br>6.600 A @ 460.0 V |
| Design Code                    | A                                       |
| Drip Cover                     | No Drip Cover                           |
| Duty Rating                    | CONT                                    |
| Efficiency @ 100% Load         | 89.5 %                                  |
| Electrically Isolated Bearing  | Not Electrically Isolated               |
| Feedback Device                | NO FEEDBACK                             |
| Front Face Code                | Encoder/Feedback Device                 |
| Front Shaft Indicator          | No Key Or Flat                          |
| Heater Indicator               | No Heater                               |
| High Voltage Full Load Amps    | 6.6 a                                   |

## Part detail

|              |            |
|--------------|------------|
| Revision     | K          |
| Type         | AC         |
| Mech. spec.  | 06H927     |
| Base         |            |
| Status       | PRD/A      |
| Elec. spec.  | 06WGX369   |
| Layout       | 06LYH927   |
| Eff. date    | 09-30-2025 |
| CD Diagram   | CD0005     |
| Poles        | 04         |
| Leads        | 9#16       |
| Proprietary  | False      |
| Created date | 09-04-2012 |

|                               |                            |
|-------------------------------|----------------------------|
| Insulation Class              | F                          |
| Inverter Code                 | Inverter Duty              |
| KVA Code                      | K                          |
| Lifting Lugs                  | Standard Lifting Lugs      |
| Locked Bearing Indicator      | Locked Bearing             |
| Max Speed                     | 6000 rpm                   |
| Motor Lead Exit               | Ko Box                     |
| Motor Lead Quantity/Wire Size | 9 @ 16 AWG                 |
| Motor Lead Termination        | Flying Leads               |
| Motor Standards               | NEMA                       |
| Motor Type                    | 0642M                      |
| Mounting Arrangement          | F1                         |
| Number of Poles               | 4                          |
| Overall Length                | 17.85 IN                   |
| Power Factor                  | 80                         |
| Product Family                | General Purpose            |
| Pulley End Bearing Type       | Ball                       |
| Pulley Face Code              | C-Face                     |
| Pulley Shaft Indicator        | Standard                   |
| Rodent Screen                 | None                       |
| RoHS Status                   | ROHS COMPLIANT             |
| Service Factor                | 1.00                       |
| Shaft Diameter                | 1.125 IN                   |
| Shaft Extension Location      | Pulley End                 |
| Shaft Ground Indicator        | No Shaft Grounding         |
| Shaft Rotation                | Reversible                 |
| Shaft Slinger Indicator       | No Slinger                 |
| Speed                         | 1750 rpm                   |
| Speed Code                    | Single Speed               |
| Starting Method               | Direct on line             |
| Thermal Device - Bearing      | None                       |
| Thermal Device - Winding      | Normally Closed Thermostat |
| Vibration Sensor Indicator    | No Vibration Sensor        |
| Winding Thermal 1             | None                       |

|                   |      |
|-------------------|------|
| Winding Thermal 2 | None |
|-------------------|------|

---

## Nameplate

| NP3855L        |                      |    |      |            |           |  |      |          |  |
|----------------|----------------------|----|------|------------|-----------|--|------|----------|--|
| CAT.NO.        | IDVSNM3665T          |    |      |            |           |  |      |          |  |
| SPEC.          | 06H927X369G1         |    |      |            |           |  |      |          |  |
| FRAME          | 184TC                |    |      | H.P.       | 5 TE      |  |      |          |  |
| VOLTS          | 230/460 1000:1 CT/VT |    |      |            |           |  |      |          |  |
| MAG. CUR.      | 7.2/3.6              |    |      |            | F.L. AMPS |  |      | 13.2/6.6 |  |
| R.P.M.         | 1750                 |    |      | R.P.M. MAX |           |  | 6000 |          |  |
| HZ.            | 60                   |    | PH.  | 3          | CLASS     |  | F    |          |  |
| SER.F.         | 1.00                 |    | DES. | A          | SL HZ     |  | 1.6  |          |  |
| NEMA NOM. EFF. | 89.5                 |    | WK2  | 0.39       |           |  |      |          |  |
| BLOWER         | V                    |    |      |            | PH        |  | HZ   | AMPS     |  |
| RATING         | 40C AMB-CONT         |    |      |            |           |  |      |          |  |
| DE             | 6206                 |    | ODE  | 6206       |           |  |      |          |  |
| CC             | 010A                 | SN |      |            |           |  |      |          |  |
|                | 1.5:1 CHP PWM        |    |      |            |           |  |      |          |  |

|            |             |             |      |                                       |      |                                |
|------------|-------------|-------------|------|---------------------------------------|------|--------------------------------|
| REL S.O.   | IDVSNM3665T | VOLTS       | 460  | ENCLOSURE                             | TEFC | WYE CONN EQ CTK OHMS PER PHASE |
| FRAME      | 184TC       | AMPS        | 6.6  | MAX SAFE RPM                          | 6000 | (AT BASE RATING, 25°C)         |
| HP         | 5           | DUTY        | CONT | In (AMPS)                             | 3.6  | R1 1.1200 X1 2.8100            |
| BASE SPEED | 1750        | S.F.        | 1.0  | P.F. @NL/FL                           | 6/79 | R2 0.9210 X2 2.3200            |
| PHASE/HZ   | 3/60        | AMB°C/INSUL | 40/F | WK <sup>2</sup> (lb-ft <sup>2</sup> ) | 0.4  | XM 68.7200                     |

### Rated Full Load Data

|            | RPM  | HP  | Torque | Volts | Freq-Hz | Amps |
|------------|------|-----|--------|-------|---------|------|
| Base Speed | 1751 | 5.0 | 15.00  | 460   | 60      | 6.54 |
| Max Speed  | 2626 | 5.0 | 9.98   | 460   | 90      | 5.95 |
| Min Speed  | 0    | 0.0 | 14.97  | 32.29 | 1.63    | 6.54 |

### Load Performance at Base Speed

|           | RPM  | HP   | Torque | Volts | Freq-Hz | Amps  |
|-----------|------|------|--------|-------|---------|-------|
| No Load   | 1799 | 0.0  | 0.00   | 460   | 60      | 3.60  |
| 1/4       | 1788 | 1.3  | 3.74   | 460   | 60      | 3.72  |
| 1/2       | 1777 | 2.5  | 7.52   | 460   | 60      | 4.37  |
| 3/4       | 1764 | 3.8  | 11.30  | 460   | 60      | 5.41  |
| Full Load | 1751 | 5.0  | 15.00  | 460   | 60      | 6.54  |
| O/L       | 1708 | 10.0 | 30.70  | 460   | 60      | 12.00 |

### Blower Data


| Volts | Ph/Hz | FL Amps | LR Amps | Frame | CFM |
|-------|-------|---------|---------|-------|-----|
|       |       |         |         |       |     |

Remarks: Calculated Data  
Vector PWM Inverter Duty

|                                            |  |                                                                                                     |                                                         |                     |
|--------------------------------------------|--|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------|
| <b>BALDOR</b><br>A MEMBER OF THE ABB GROUP |  | DR BY Michael Williamson<br>CK BY Michael Williamson<br>APP BY Michael Williamson<br>DATE 8/27/2012 | A-C MOTOR<br>PERFORMANCE CURVES<br>ISSUE DATE 8/27/2012 | <b>06F551X369G1</b> |
|--------------------------------------------|--|-----------------------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------|

|            |             |              |      |              |      |                        |        |                |
|------------|-------------|--------------|------|--------------|------|------------------------|--------|----------------|
| REL S.O.   | IDVSNM3665T | VOLTS        | 460  | ENCLOSURE    | TEFC | WYE/CONNECTION         | EQ     | OHMS PER PHASE |
| FRAME      | 184TC       | AMPS         | 6.6  | MAX SAFE RPM | 6000 | (AT BASE RATING, 25°C) |        |                |
| HP         | 5           | DUTY         | CONT | In (AMPS)    | 3.6  | R1                     | 1.1200 | X1 2.8100      |
| BASE SPEED | 1750        | S.F.         | 1.00 | P.F. @ NL/FL | 6/79 | R2                     | 0.9210 | X2 2.3200      |
| PHASE/HZ   | 3/60        | AMB°C/INSUL. | 40/F | WK² (lb-ft²) | 0.4  |                        |        | XM 68.7200     |

Vector PWM Inverter Duty  
Variable Speed AC Motor Curves

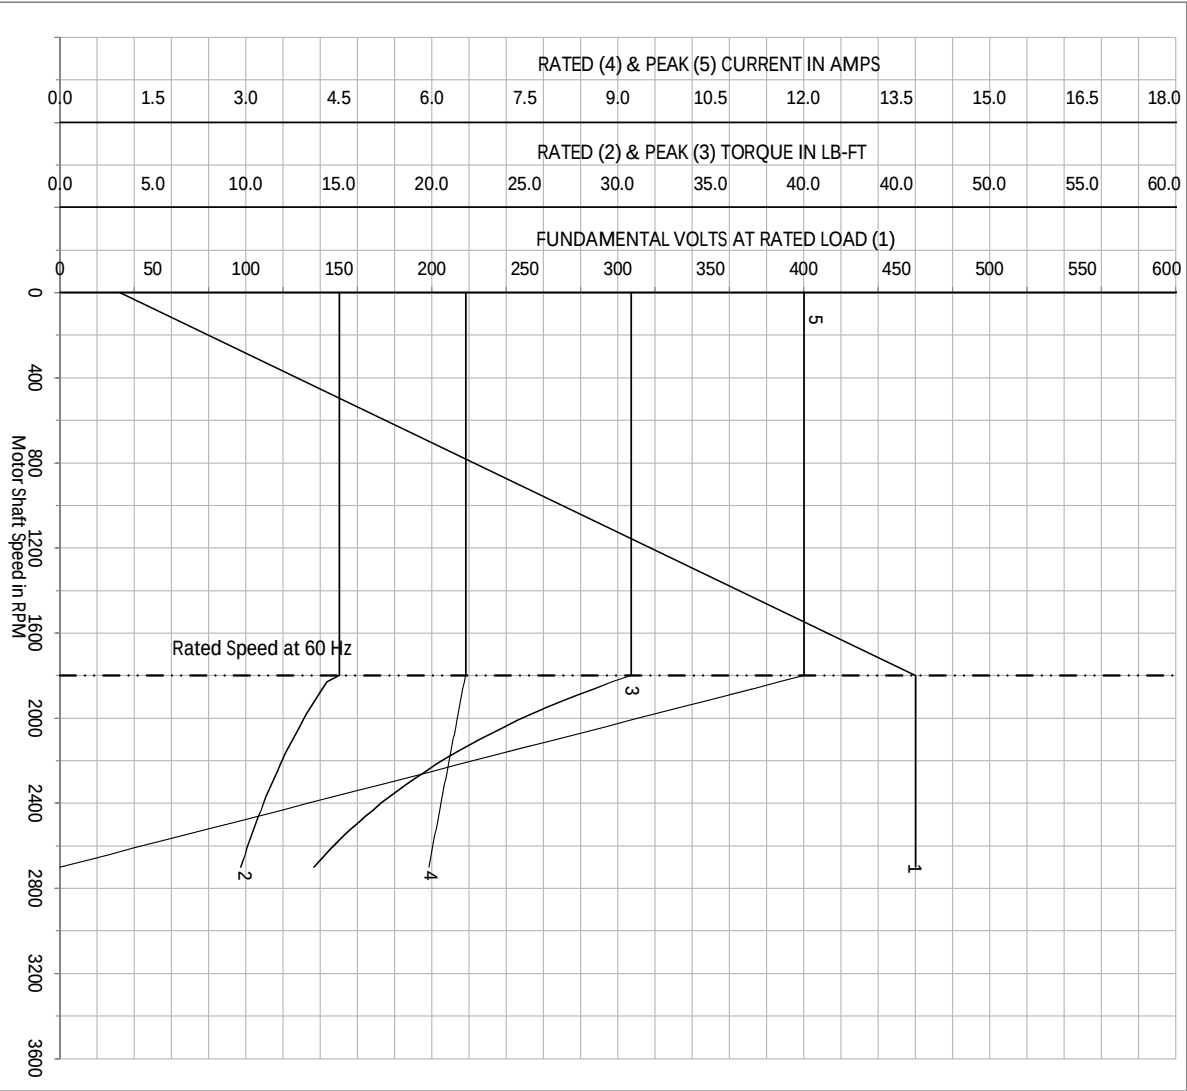


Calculated Data

Data Valid For Nameplate Speed Range only

|                                  |        |                    |                       |                     |
|----------------------------------|--------|--------------------|-----------------------|---------------------|
| <b>BALDOR</b>                    | DR BY  | Michael Williamson | A-C MOTOR PERFORMANCE | <b>06F551X369G1</b> |
| <b>A MEMBER OF THE ABB GROUP</b> | CK BY  | Michael Williamson | CURVES                | SH 1 of 2           |
|                                  | APP BY | Michael Williamson |                       | ISSUE DATE          |
|                                  | DATE   | 8/27/2012          |                       | 8/27/2012           |

|            |             |              |      |                                       |      |                                                          |
|------------|-------------|--------------|------|---------------------------------------|------|----------------------------------------------------------|
| REL S.O.   | IDVSNM3665T | VOLTS        | 460  | ENCLOSURE                             | TEFC | WYE CONN EQ CKT OHMS PER PHASE<br>(AT BASE RATING, 25°C) |
| FRAME      | 184TC       | AMPS         | 6.6  | MAX SAFE RPM                          | 6000 |                                                          |
| HP         | 5           | DUTY         | CONT | In (AMPS)                             | 3.6  | X1 2.8100                                                |
| BASE SPEED | 1750        | S.F.         | 1.00 | P.F. @NL/FL                           | 6/79 | R2 0.9210 X2 2.3200                                      |
| PHASE/HZ   | 3/60        | AMB°C/INSUL. | 40/F | WK <sup>2</sup> (Lb-Ft <sup>2</sup> ) | 0.4  | XM 68.7200                                               |

Vector PWM Inverter Duty  
Variable Speed AC Motor Curves

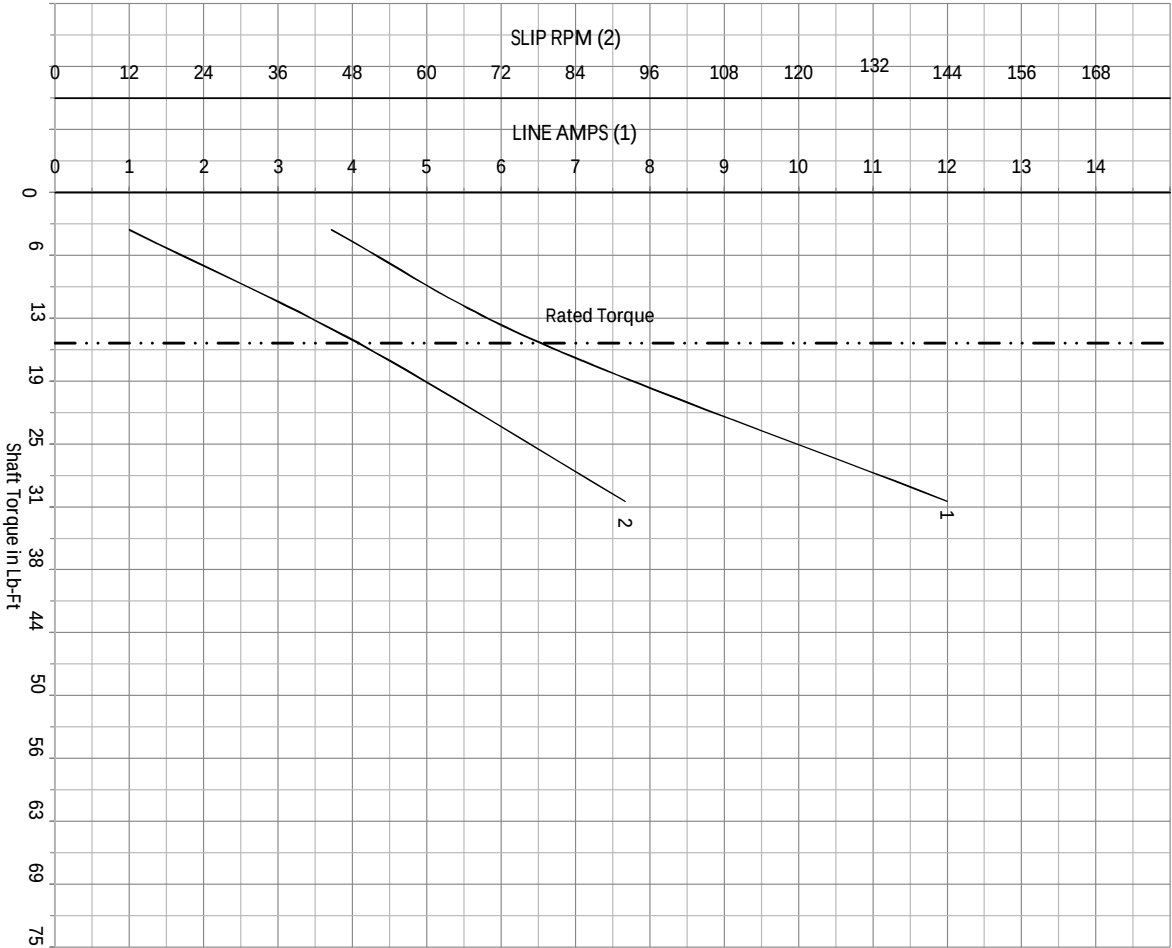

Calculated Data

Data Valid For Nameplate Speed Range only

**BALDOR**  
A MEMBER OF THE ABB GROUP

DR BY  
Michael Williamson  
CK BY  
Michael Williamson  
APP BY  
Michael Williamson  
DATE  
8/27/2012

A-C MOTOR  
PERFORMANCE CURVES

06F551X369G1  
SH 1 of 2  
ISSUE DATE  
8/27/2012



