



Customer information packet

JMEWDM3613T-5

5HP, 3450RPM, 3PH, 60HZ, 184JM, 3630M, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184JM
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	575.0 V @ 60 HZ
Agency Approvals	CSA EEV CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	4.700 A @ 575.0 V
Design Code	A
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	88.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	4.7 a
Insulation Class	F

Part detail

Revision	E
Type	AC
Mech. spec.	36K605
Base	
Status	PRD/A
Elec. spec.	36WGS505
Layout	36LYK605
Eff. date	02-14-2024
CD Diagram	CD0006
Poles	02
Leads	3#16
Proprietary	False
Created date	12-27-2016

Inverter Code	Inverter Ready
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	3 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3630M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.05 IN
Power Factor	91
Product Family	Wash Down
Pulley End Bearing Type	Ball
Pulley Face Code	C-Face
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1669L									
CAT.NO.	JMEWDM3613T-5								
SPEC.	36K605S505G1								
HP	5								
VOLTS	575								
AMP	4.7								
RPM	3450								
FRAME	184JM		HZ	60			PH	3	
SER.F.	1.15	CODE	L	DES	A	CLASS	F		
NEMA-NOM-EFF	88.5	PF	91						
RATING	40C AMB-CONT								
CC	010A								
DE	6207		ODE	6205					
ENCL	TEFC	SN							
BLANK									

AC Induction Motor Performance Data

Record # 31109

Typical performance - not guaranteed values

Winding: 36WGS505-R001		Type: 3630M	Enclosure: TEFC
Nameplate Data		575 V, 60 Hz: Single Voltage Motor	
Rated Output (HP)	5	Full Load Torque	7.64 LB-FT
Volts	575	Start Configuration	direct on line
Full Load Amps	4.7	Breakdown Torque	33.7 LB-FT
R.P.M.	3450	Pull-up Torque	23.5 LB-FT
Hz	60 Phase	Locked-rotor Torque	27.5 LB-FT
NEMA Design Code	A KVA Code	Starting Current	45.7 A
Service Factor (S.F.)	1.15	No-load Current	1.34 A
NEMA Nom. Eff.	88.5 Power Factor	Line-line Res. @ 25°C	3.57 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	72°C
S.F. Amps		Temp. Rise @ S.F. Load	88°C
		Locked-rotor Power Factor	45
		Rotor inertia	0.134 LB-FT ²

Load Characteristics 575 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	63	81	88	91	93	93	92
Efficiency	83.2	88.4	89.1	88.5	87	85.7	87.5
Speed	3569	3537	3504	3466	3428	3385	3443
Line amperes	1.79	2.61	3.58	4.68	5.81	7.05	5.36


ABB Motors and Mechanical Inc.


WINDING # 36WGS505

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 3450 RPM 575 V 3630M

TORQUES (LB-FT): PO=33.7 PU=23.5 LR=27.5 LRA=45.7

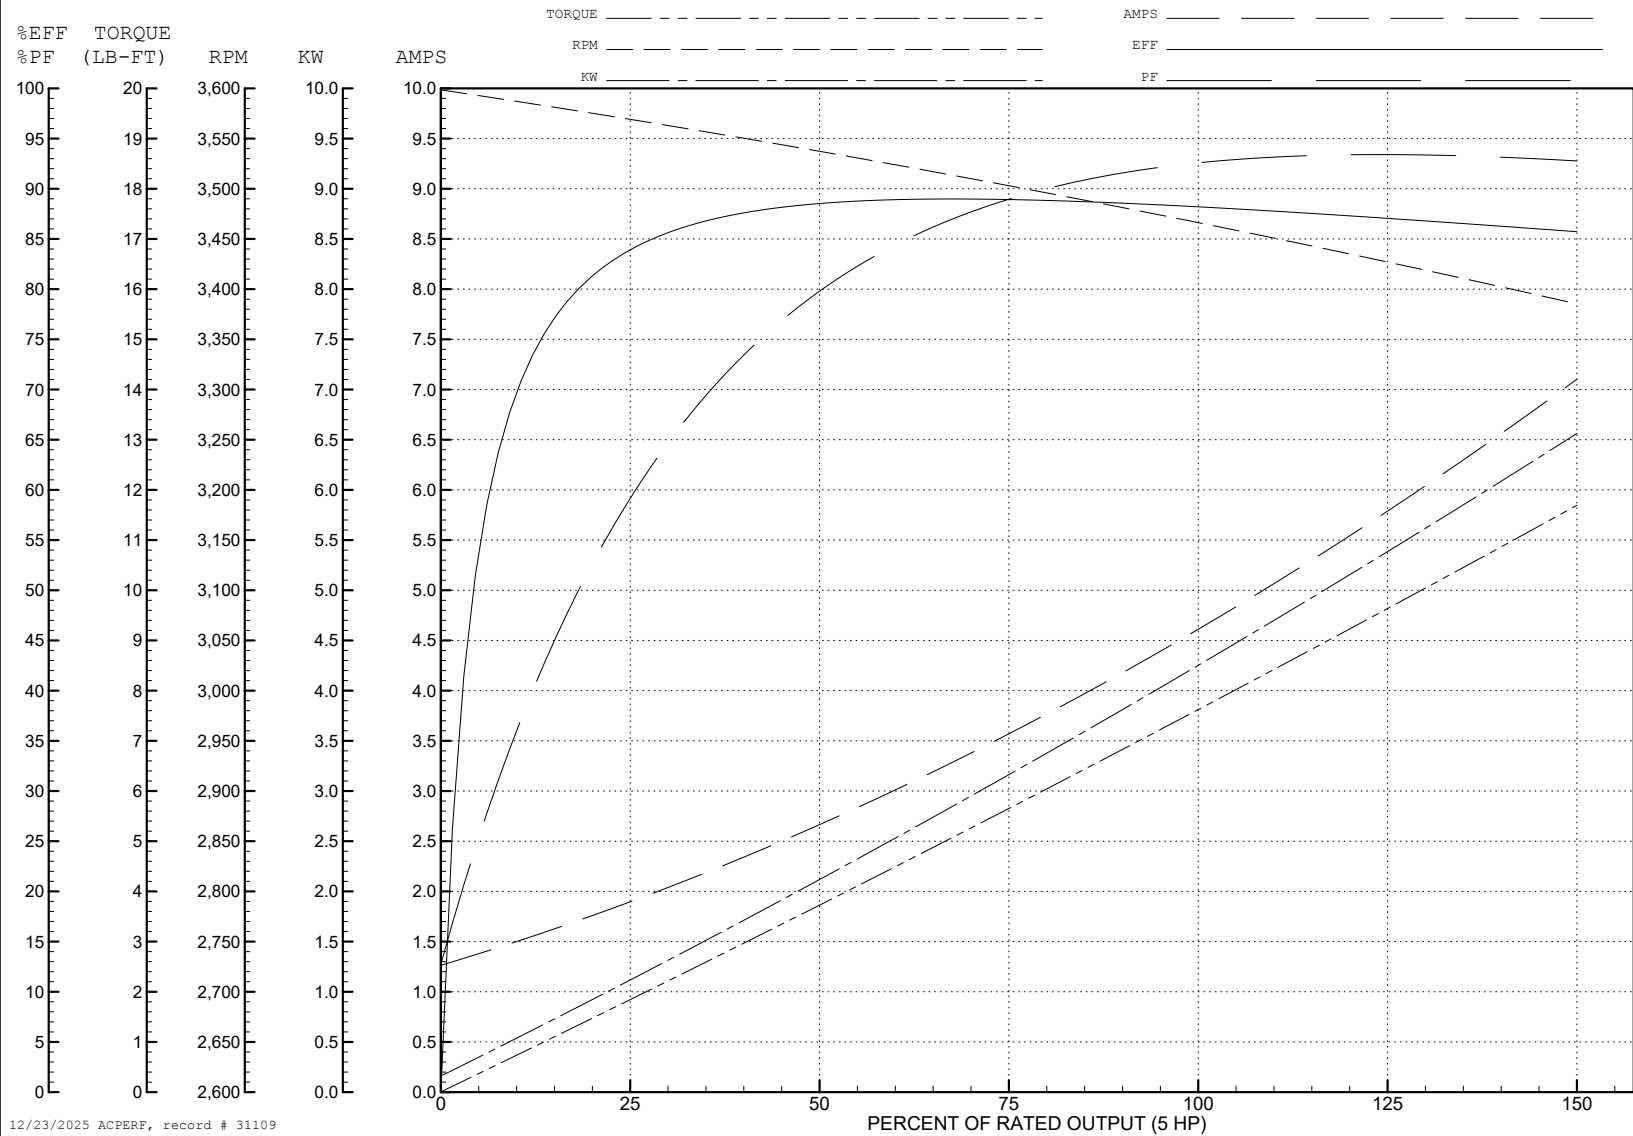

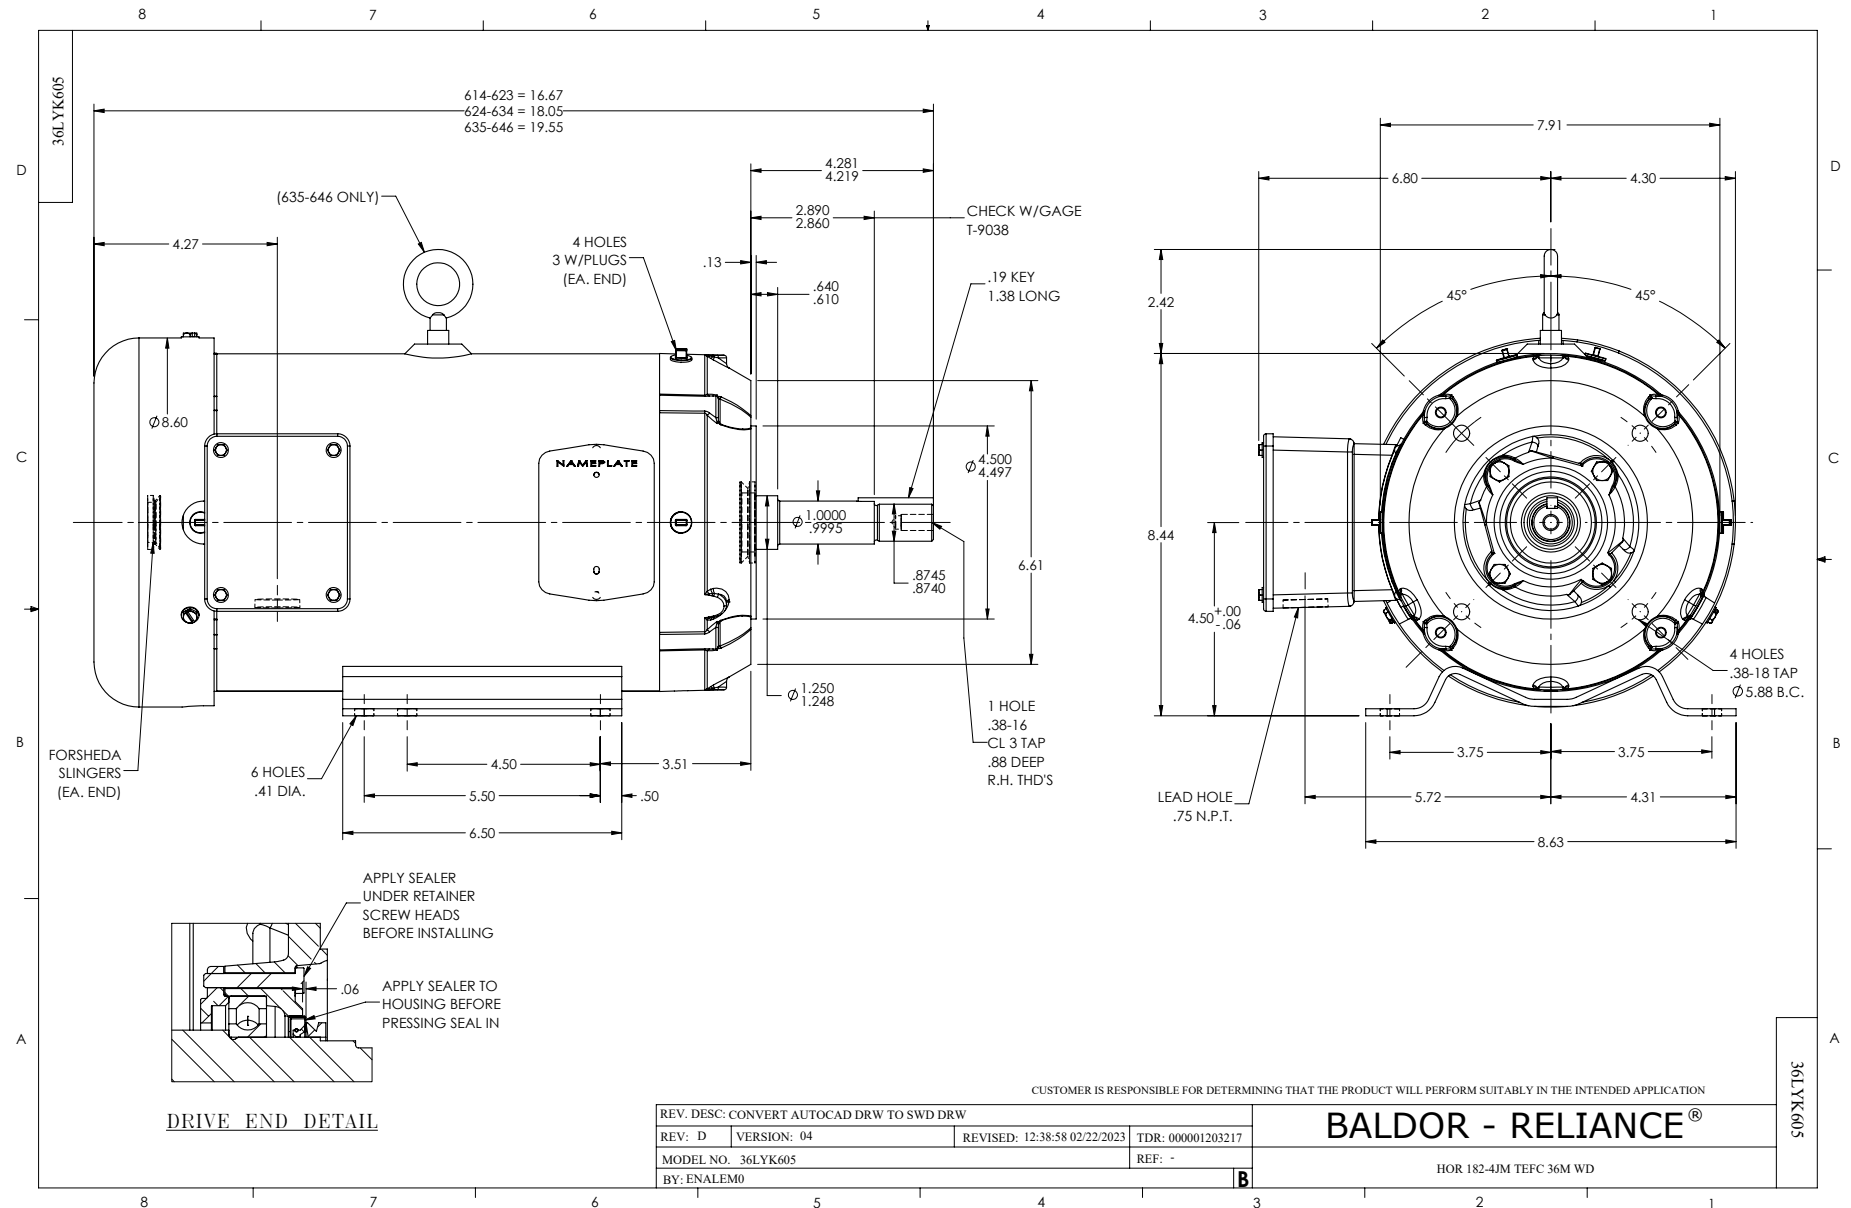

CD0006

TYPICAL WYE-CONNECTED MOTOR

1-BLU

J-BRN

OPTIONAL THERMOSTATS

J-BRN

3-ORG

2-WHT

TYPICAL DELTA-CONNECTED MOTOR

1-BLU

J-BRN

2-WHT

OPTIONAL THERMOSTATS

J-BRN

3-ORG

1

2

3

LINE

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.

2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.

3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.

4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.

5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

CD0006

REV. DESC: ADD CLASS CONN00000007			BALDOR - RELIANCE® 3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED SH 1 of 1
REV. LTR: E	VERSION: 01	TDR: 000001099922	
FILE: \AAA\00005\141	REVISED: 10: 24: 49 02/19/2019	BY: ENBRIRO	
MTL: —			

36WGS042: Electrical Design

Page 8 of 8