BALDOR • RELIANCE

Customer information packet

JMXM14321T

3HP, 3450RPM, 3PH, 60HZ, 145JM, 3532M, XPFC, F1
Class - CLI GP D
Division - Division I

Copyright © All product information within this document is subject to ABB Motors and Mechanical Inc. copyright © protection, unless otherwise noted.
12/23/2025 1:42:37 AM

Specifications

Enclosure	XPFC
Frame	145JM
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	CLI GP D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	3.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
	460.0 V @ 60 HZ
Agency Approvals	UL
	CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.600 A @ 460.0 V
	7.200 A @ 230.0 V
	7.900 A @ 208.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	3.6 a

Part detail

Revision	B
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	35WGQ060
Layout	35LYT904
Eff. date	03-08-2024
CD Diagram	CD0005
Poles	02
Leads	9#18
Proprietary	False
Created date	04-16-2021

Insulation Class	F
Inverter Code	Not Inverter
IP Rating	NONE
KVA Code	L
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3532M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	18.67 IN
Power Factor	92
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP0015XPSLEV								
NO.		**CC**	010A					
SER.								
SPEC.	35-0000-1110							
CAT.NO.	JMXM14321T							
HP	3	**T. CODE**	T3C					
VOLTS	230/460							
AMPS	7.2/3.6							
RPM	3450							
HZ	60	**PH**	3	**CL**	F			
SER.F.	1.00	**DES**	B	**CODE**	L			
RATING	40C AMB-CONT							
FRAME	145JM	**NEMA-NOM-EFF**	86.5					
		PF	92					
BLANK	NEMA MG-1 PART 5, IP54							

AC Induction Motor Performance Data
Record # 53449
Typical performance - not guaranteed values

Winding: 35WGQ060-R025	**Type:** 3532M	**Enclosure:** XPFC

Nameplate Data				**460 V, 60 Hz: High Voltage Connection**	
Rated Output (HP)			3	**Full Load Torque**	4.5 LB-FT
Volts			230/460	**Start Configuration**	direct on line
Full Load Amps			7.2/3.6	**Breakdown Torque**	18 LB-FT
R.P.M.			3450	**Pull-up Torque**	11 LB-FT
Hz	60	**Phase**	3	**Locked-rotor Torque**	16 LB-FT
NEMA Design Code	B	**KVA Code**	L	**Starting Current**	33 A
Service Factor (S.F.)			1	**No-load Current**	1.2 A
NEMA Nom. Eff.	86.5	**Power Factor**	92	**Line-line Res. @ 25ºC**	4.7 Ω
Rating - Duty			40C AMB-CONT	**Temp. Rise @ Rated Load**	61°C
				Locked-rotor Power Factor	47.1
				Rotor inertia	0.0885 LB-FT2

Load Characteristics 460 V, 60 Hz, 3 HP

% of Rated Load	**25**	**50**	**75**	**100**	**125**	**150**
Power Factor	57	77	85	88	89	90
Efficiency	84.1	87.9	88.4	87.2	85.7	83.5
Speed	3562	3531	3498	3462	3421	3375
Line amperes	1.5	2.1	2.8	3.6	4.5	5.4

ABB Motors and Mechanical Inc.

WINDING # 35WGQ060

3 HP 3 PH 60 HZ 3450 RPM 460 V 3532M

Typical performance - not guaranteed values.

TORQUES(LB-FT): PO=18 PU=11 LR=16 LRA=33

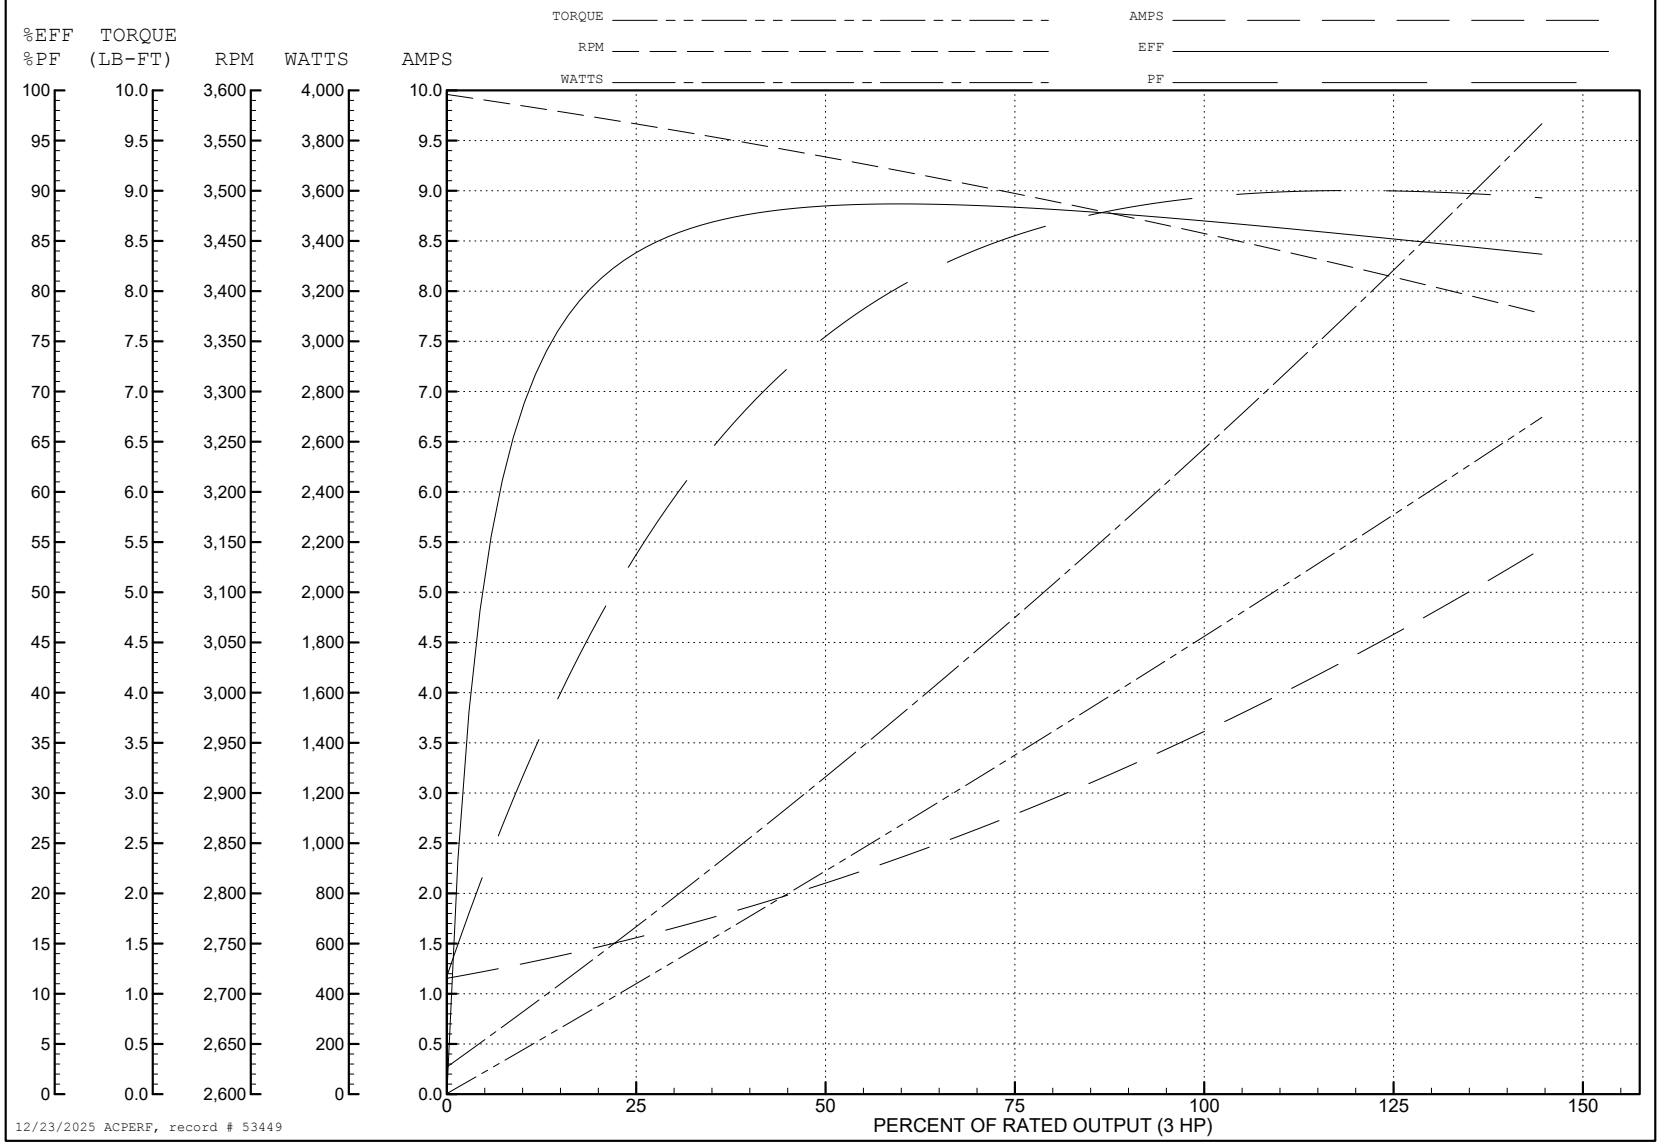

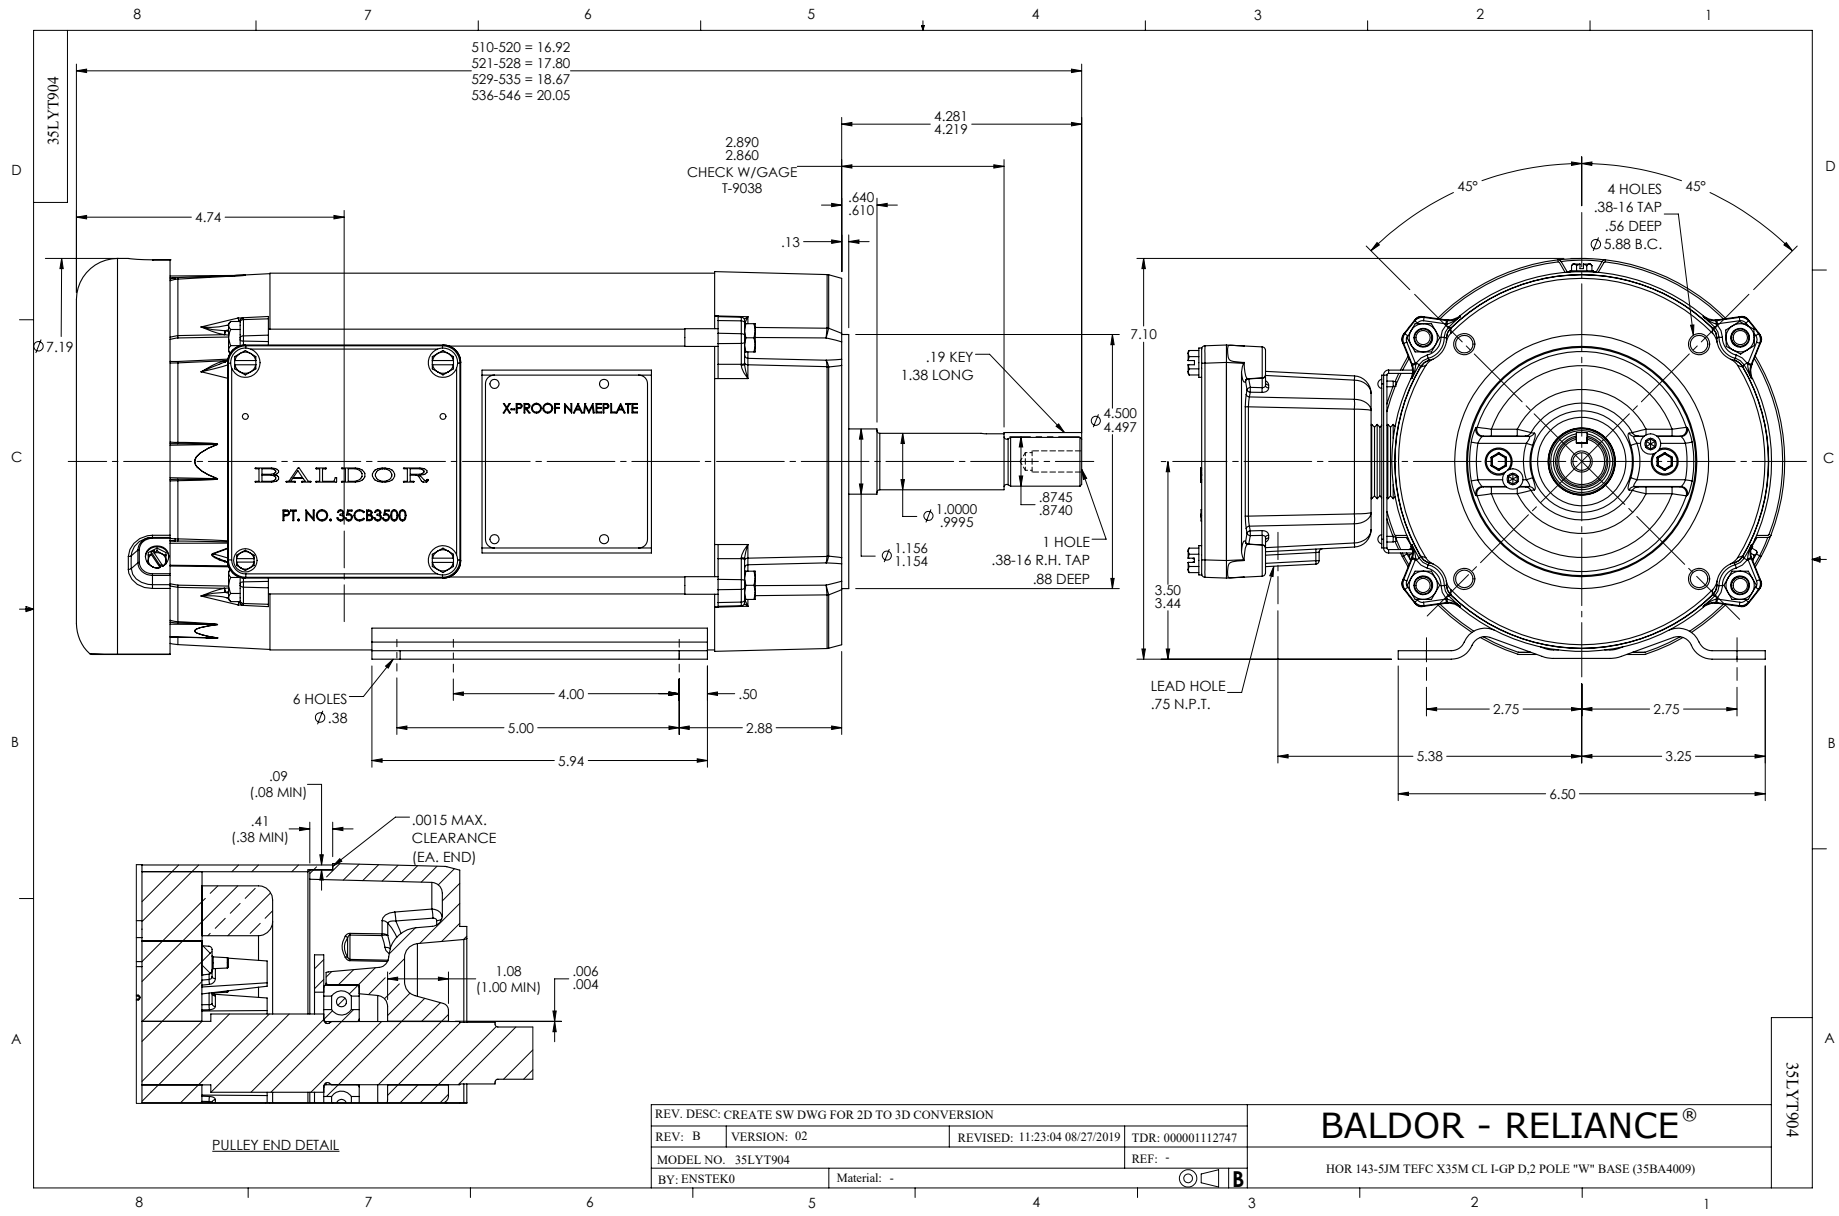
35LYT904
510-520 = 16.92
521-528 = 17.80
529-535 = 18.67
536-546 = 20.05
4.281
4.219
2.890
2.860
CHECK W/GAGE
T-9038
.640
.610
.13
4.74
Ø7.19
.19 KEY
1.38 LONG
X-PROOF NAMEPLATE
BALDOR
PT. NO. 35CB3500
Ø 4.500
4.497
7.10
Ø 1.0000
.9995
.8745
.8740
Ø 1.156
1.154
1 HOLE
.38-16 R.H. TAP
.88 DEEP
6 HOLES
Ø.38
4.00
.50
5.00
2.88
5.94
45°
45°
4 HOLES
.38-16 TAP
.56 DEEP
Ø 5.88 B.C.
3.50
3.44
LEAD HOLE
.75 N.P.T.
2.75
2.75
5.38
3.25
6.50
.09
(.08 MIN)
.41
(.38 MIN)
.0015 MAX.
CLEARANCE
(EA. END)
1.08
(1.00 MIN)
.006
.004
PULLEY END DETAIL
REV. DESC: CREATE SW DWG FOR 2D TO 3D CONVERSION
REV: B
VERSION: 02
REVISED: 11:23:04 08/27/2019
TDR: 000001112747
MODEL NO. 35LYT904
REF: -
BY: ENSTEK0
Material: -
B
BALDOR - RELIANCE®
HOR 143-5JM TEFC X35M CL I-GP D,2 POLE "W" BASE (35BA4009)
35LYT904

CD0005

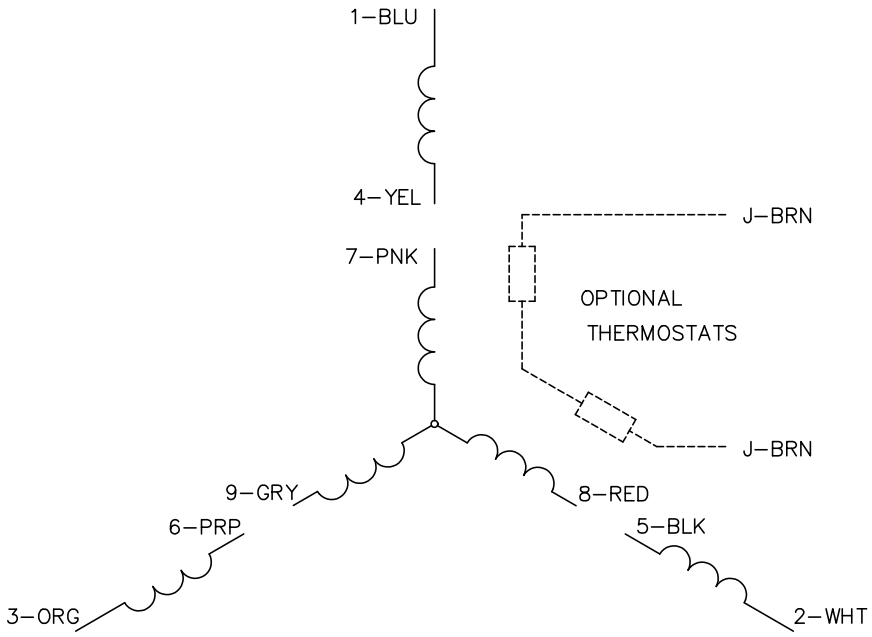

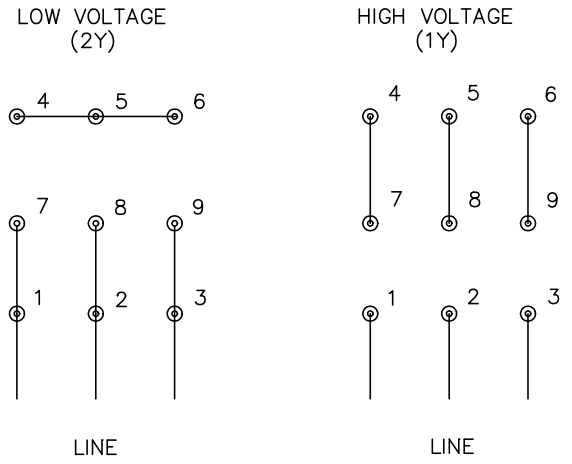

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

CD0005

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			BALDOR ELECTRIC Co.
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
CD0005		FILE: AAA00005140	MDL: –
		MTL: –	3PH, DV, 9 LEADS