



Customer information packet

JPDRX18544T

5HP, 1750//1450RPM, 3PH, 60/50HZ, 184JP, XPFC

Class - CLI GP C,D

Division - Division I

Specifications

Enclosure	XPFC
Frame	184JP
Frame Material	Iron
Frequency	50.00 Hz 60.00 Hz
Haz Area Class and Group	CLI GP C,D
Haz Area Division	Division I
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ 3.000 HP @ 50 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 190.0 V @ 50 HZ 230.0 V @ 60 HZ 380.0 V @ 50 HZ
Agency Approvals	UL CSA EEV
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Constant Torque Speed Range	6
Current @ Voltage	10.200 A @ 190.0 V 13.200 A @ 230.0 V 5.100 A @ 380.0 V 6.600 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT

Part detail

Revision	D
Type	AC
Mech. spec.	
Base	
Status	PRD/A
Elec. spec.	06WGY545
Layout	06LYH458
Eff. date	02-28-2024
CD Diagram	CD0005
Poles	04
Leads	9#16
Proprietary	False
Created date	08-02-2019

Efficiency @ 100% Load	89.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Haz Area Temp Code	T3C
Heater Indicator	No Heater
High Voltage Full Load Amps	5.1 a
Insulation Class	F
Inverter Code	Inverter Duty
IP Rating	NONE
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Max Speed	2700 rpm
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	0642M
Mounting Arrangement	F1
Number of Poles	4
Power Factor	81
Product Family	General Purpose
Pulley Face Code	C-Face
Rodent Screen	None
RoHS Status	ROHS NON-COMPLIANT
Service Factor	1.00
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Speed	1750 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None

Winding Thermal 2	None
-------------------	------

Nameplate

NP1401XPSLEV													
NO.						CC	010A						
S/N						TEMP CODE			T3C				
SPEC.	06-0000-0195					INV.TYPE			PWM				
CAT.NO.	JPDRX18544T					C HP FR		60	C HP TO		90		
HP	5//3					CT HZ FROM			6	CT HZ TO		60	
VOLTS	230/460//190/380					VT HZ FROM			6	VT HZ TO		60	
AMPS	13.2/6.6//10.2/5.1				MAG CUR	6/3							
RPM	1750//1450				MX RPM	2700							
HZ	60//50	PH	3	CL	F	NOM.EFF.		89.5					
SER.F.	1.00	DES	B	SL HZ	1.7	WK2	0.39						
FRAME	184JP	RATING		40C AMB-CONT									
	55C AMB @ 1.0 SF												
	1.15 SF ON SINEWAVE				NEMA MG-1 PT 5,IP55								

AC Induction Motor Performance Data

Record # 72834

Typical performance - not guaranteed values

Winding: 06WGY545-R005		Type: 0642M	Enclosure: XPFC
Nameplate Data		460 V, 60 Hz: High Voltage Connection	
Rated Output (HP)	5//3	Full Load Torque	15 LB-FT
Volts	230/460//190/380	Start Configuration	direct on line
Full Load Amps	13.2/6.6//10.2/5.1	Breakdown Torque	53.9 LB-FT
R.P.M.	1750//1450	Pull-up Torque	22.4 LB-FT
Hz	60//50	Locked-rotor Torque	31.8 LB-FT
NEMA Design Code	B	Starting Current	46.6 A
Service Factor (S.F.)	1	No-load Current	3.02 A
NEMA Nom. Eff.	89.5	Line-line Res. @ 25°C	2.63 Ω
Rating - Duty	40C AMB-CONT	Temp. Rise @ Rated Load	53°C
		Locked-rotor Power Factor	40.5
		Rotor inertia	0.391 LB-FT ²

Load Characteristics 460 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	41	63	75	81	84	85
Efficiency	85.1	89.7	90.3	89.8	88.4	86.8
Speed	1789	1777	1765	1752	1737	1721
Line amperes	3.35	4.14	5.21	6.45	7.91	9.47


ABB Motors and Mechanical Inc.


WINDING # 06WGY545

Typical performance - not guaranteed values.


5 HP 3 PH 60 HZ 1752 RPM 460 V 0642M

TORQUES (LB-FT): PO=53.9 PU=22.4 LR=31.8 LRA=46.6

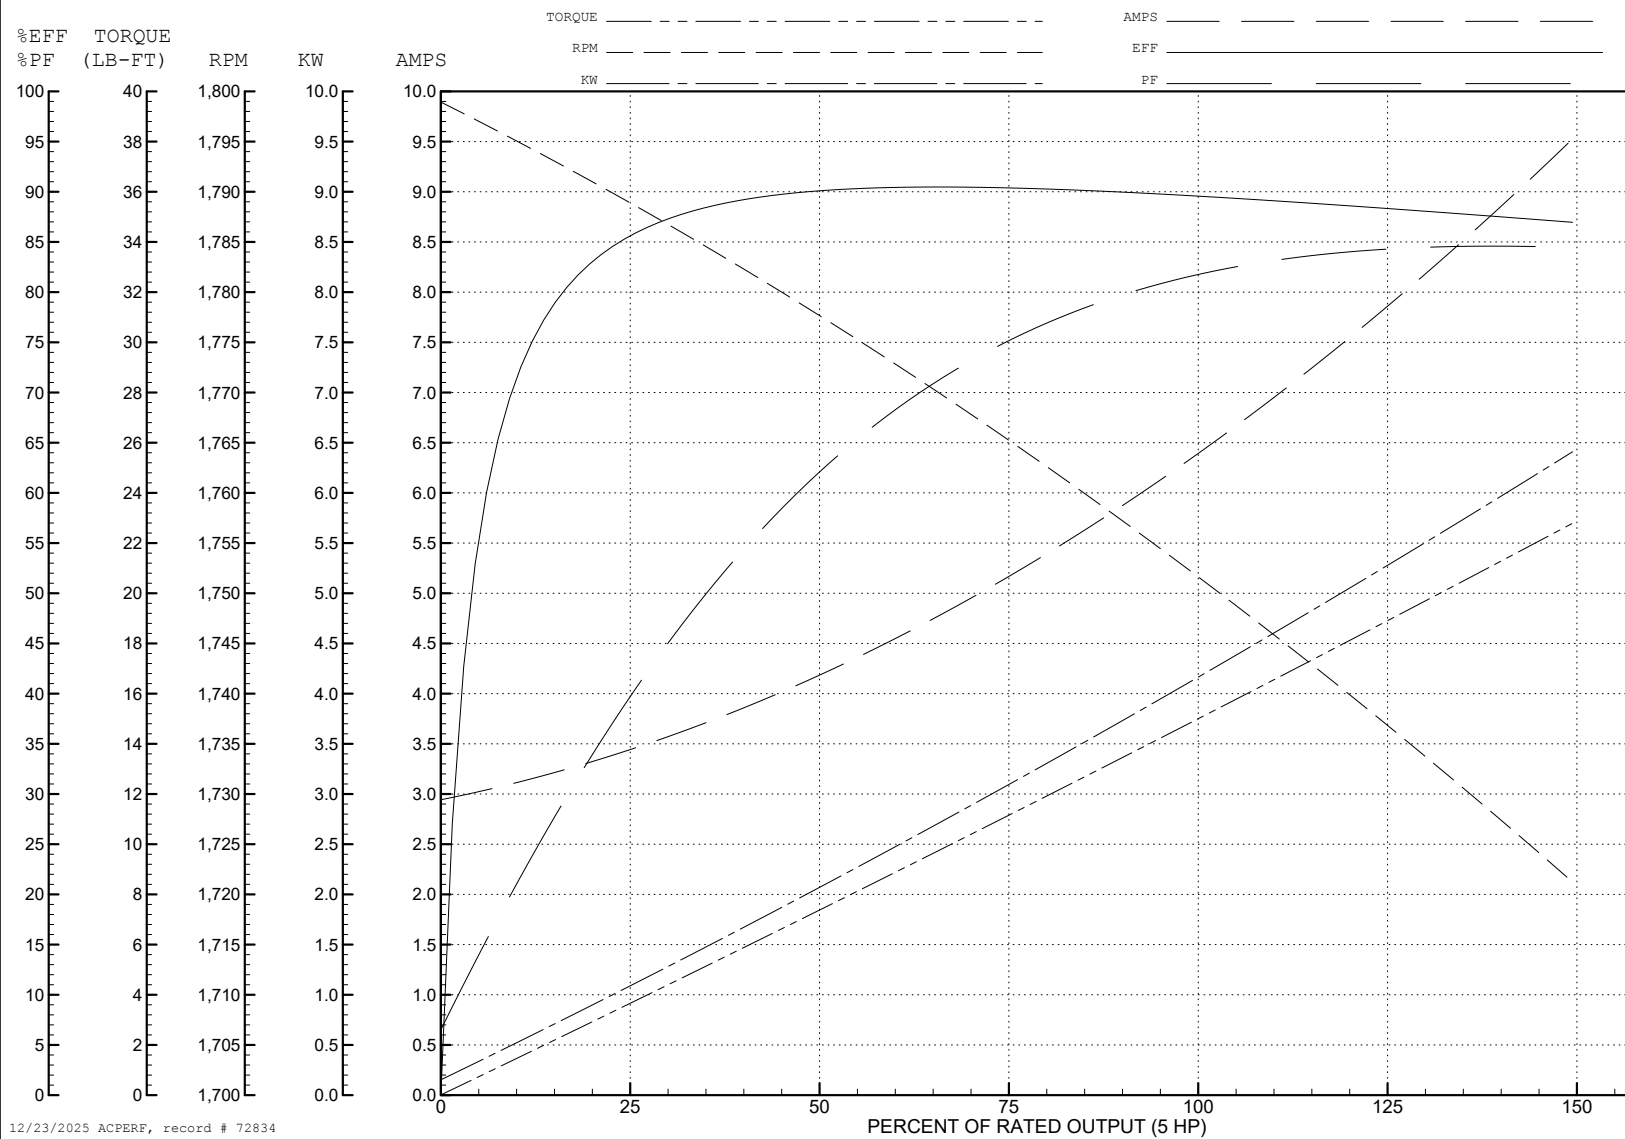

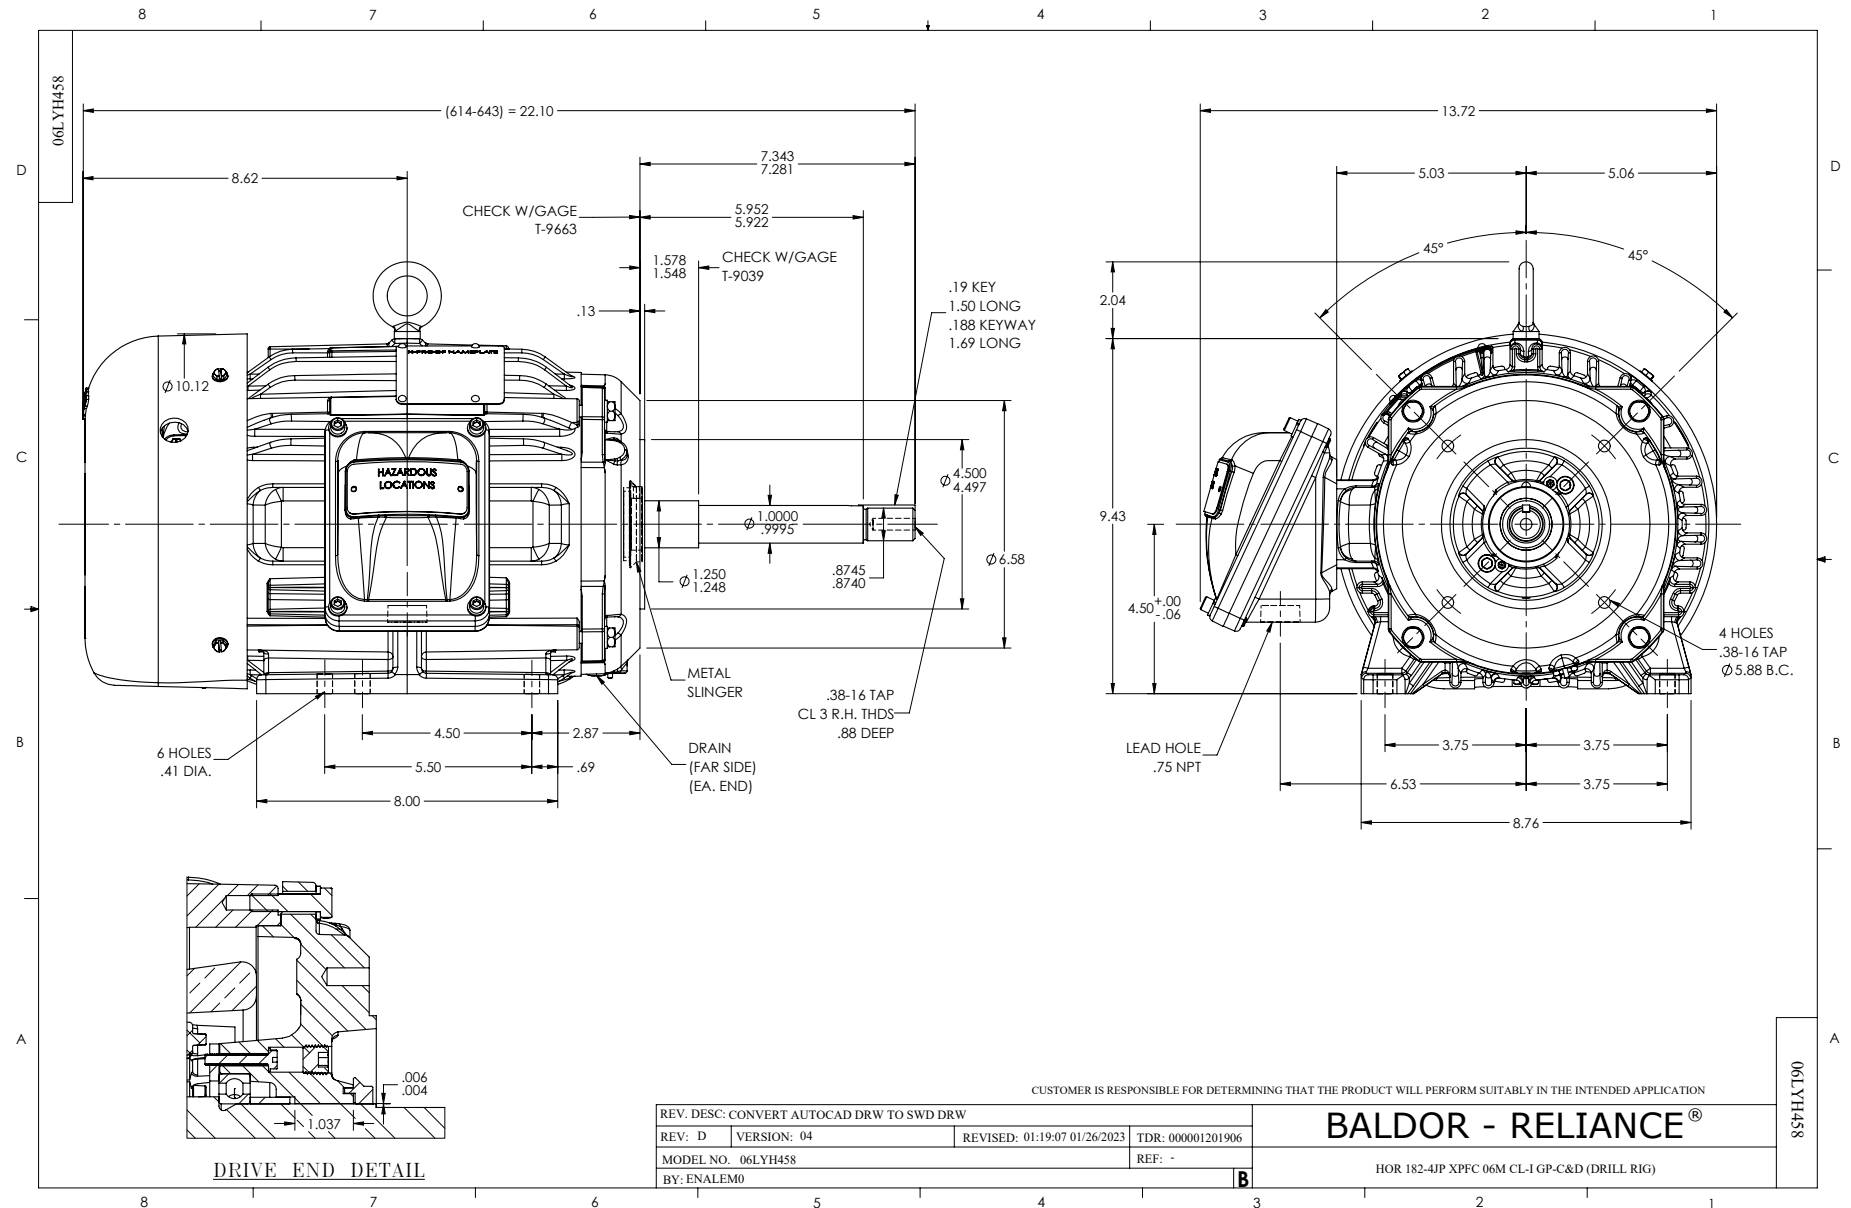

CD0005

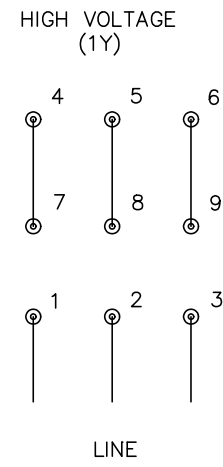

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005