



Customer information packet

L3507-50

.75/.55KW, 1450RPM, 1PH, 50HZ, 56, 3524LC, TEF

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	56
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	.550 KW @ 50 HZ
Phase	1
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	110.0 V @ 50 HZ 220.0 V @ 50 HZ
Agency Approvals	C UR US CE CURUS UKCA WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	7.000 A @ 110.0 V 3.500 A @ 220.0 V
Design Code	-
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	77.1 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part detail

Revision	E
Type	AC
Mech. spec.	35E008
Base	
Status	PRD/A
Elec. spec.	35WGG605
Layout	35LYE008
Eff. date	05-07-2024
CD Diagram	CD0055
Poles	04
Leads	6#18
Proprietary	False
Created date	02-20-2023

Heater Indicator	No Heater
High Voltage Full Load Amps	3.5 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3524LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	13.23 IN
Power Factor	92
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.25
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1372L									
CAT.NO.	L3507-50								
SPEC.	35E008G605G1								
HP	.75/.55KW								
VOLTS	110/220								
AMP	7/3.5								
R.P.M. (1/MIN)	1450								
FRAME	56		HZ	50			PH	1	
SER.F.	1.25	CODE	K	DES	-	CL	F		
NEMA-NOM-EFF	77.1	PF	92						
RATING	40C AMB-S1 CONT								
CC		IP44 KG18 IC411							
DE	6205		ODE	6203					
ENCL	TEFC	SN							
	SFA 8.4/4.2								

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 101535

Typical performance - not guaranteed values

Winding: 35WGG605-R001			Type: 3524LC		Enclosure: TEFC	
Nameplate Data				220 V, 50 Hz: High Voltage Connection		
Rated Output (KW)		.55		Full Load Torque		2.673 LB-FT
Volts		110/220		Start Configuration		direct on line
Full Load Amps		7/3.5		Breakdown Torque		6.94 LB-FT
R.P.M.		1450		Pull-up Torque		4.67 LB-FT
Hz	50	Phase	1	Locked-rotor Torque		6.05 LB-FT
NEMA Design Code		- KVA Code		Starting Current		27.1 A
Service Factor (S.F.)		1.25		No-load Current		1.61 A
NEMA Nom. Eff.		77.1	Power Factor	92	Line-line Res. @ 25°C 4.035 Ω A Ph 2.2482 Ω B Ph	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		43°C
S.F. Amps		8.4/4.2		Temp. Rise @ S.F. Load		54°C

Load Characteristics 220 V, 50 Hz, 0.55 KW

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	69	82	89	92	94	95	94
Efficiency	52.6	69	75.6	78.2	78.2	76.3	78.2
Speed	1486.5	1476.2	1464.6	1451.5	1435.5	1415.1	1436
Line amperes	1.78	2.22	2.79	3.45	4.23	5.15	4.23


ABB Motors and Mechanical Inc.


WINDING # 35WGG605

Typical performance - not guaranteed values.


0.55 KW 1 PH 50 HZ 1450 RPM 220 V 3524LC

TORQUES (LB-FT) : PO=6.94 PU=4.67 LR=6.05 LRA=27.1

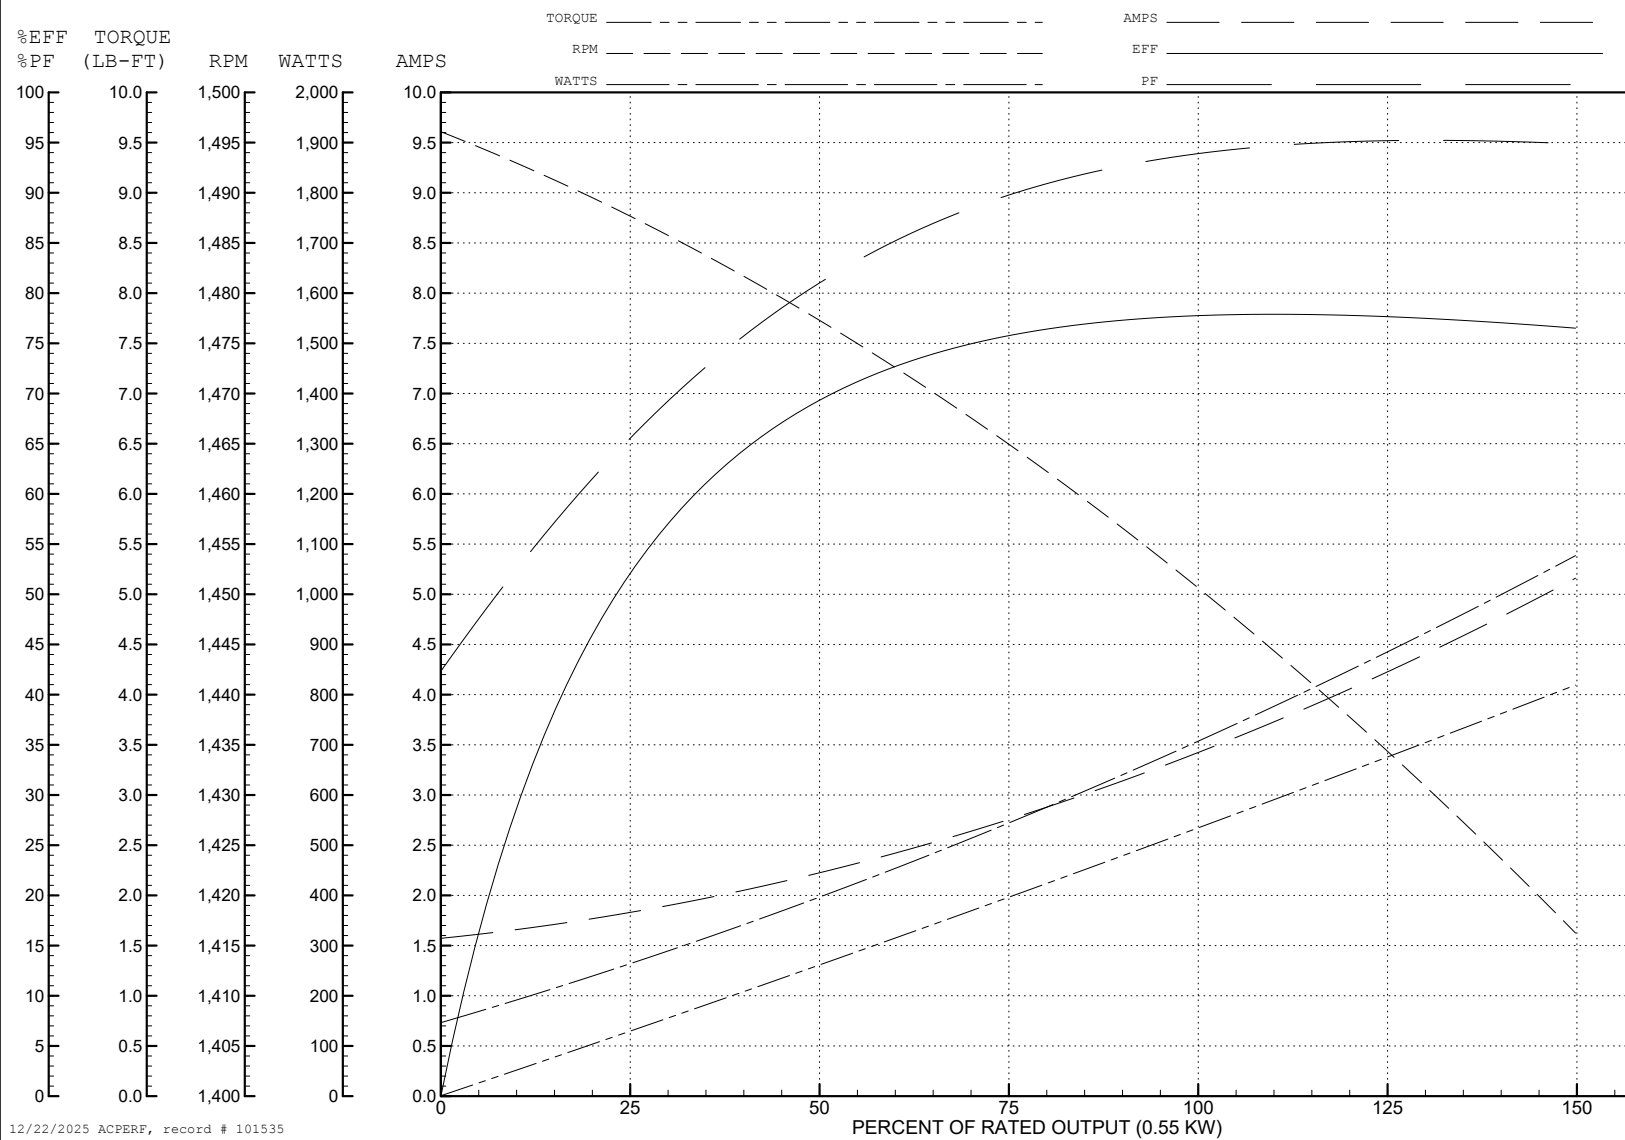

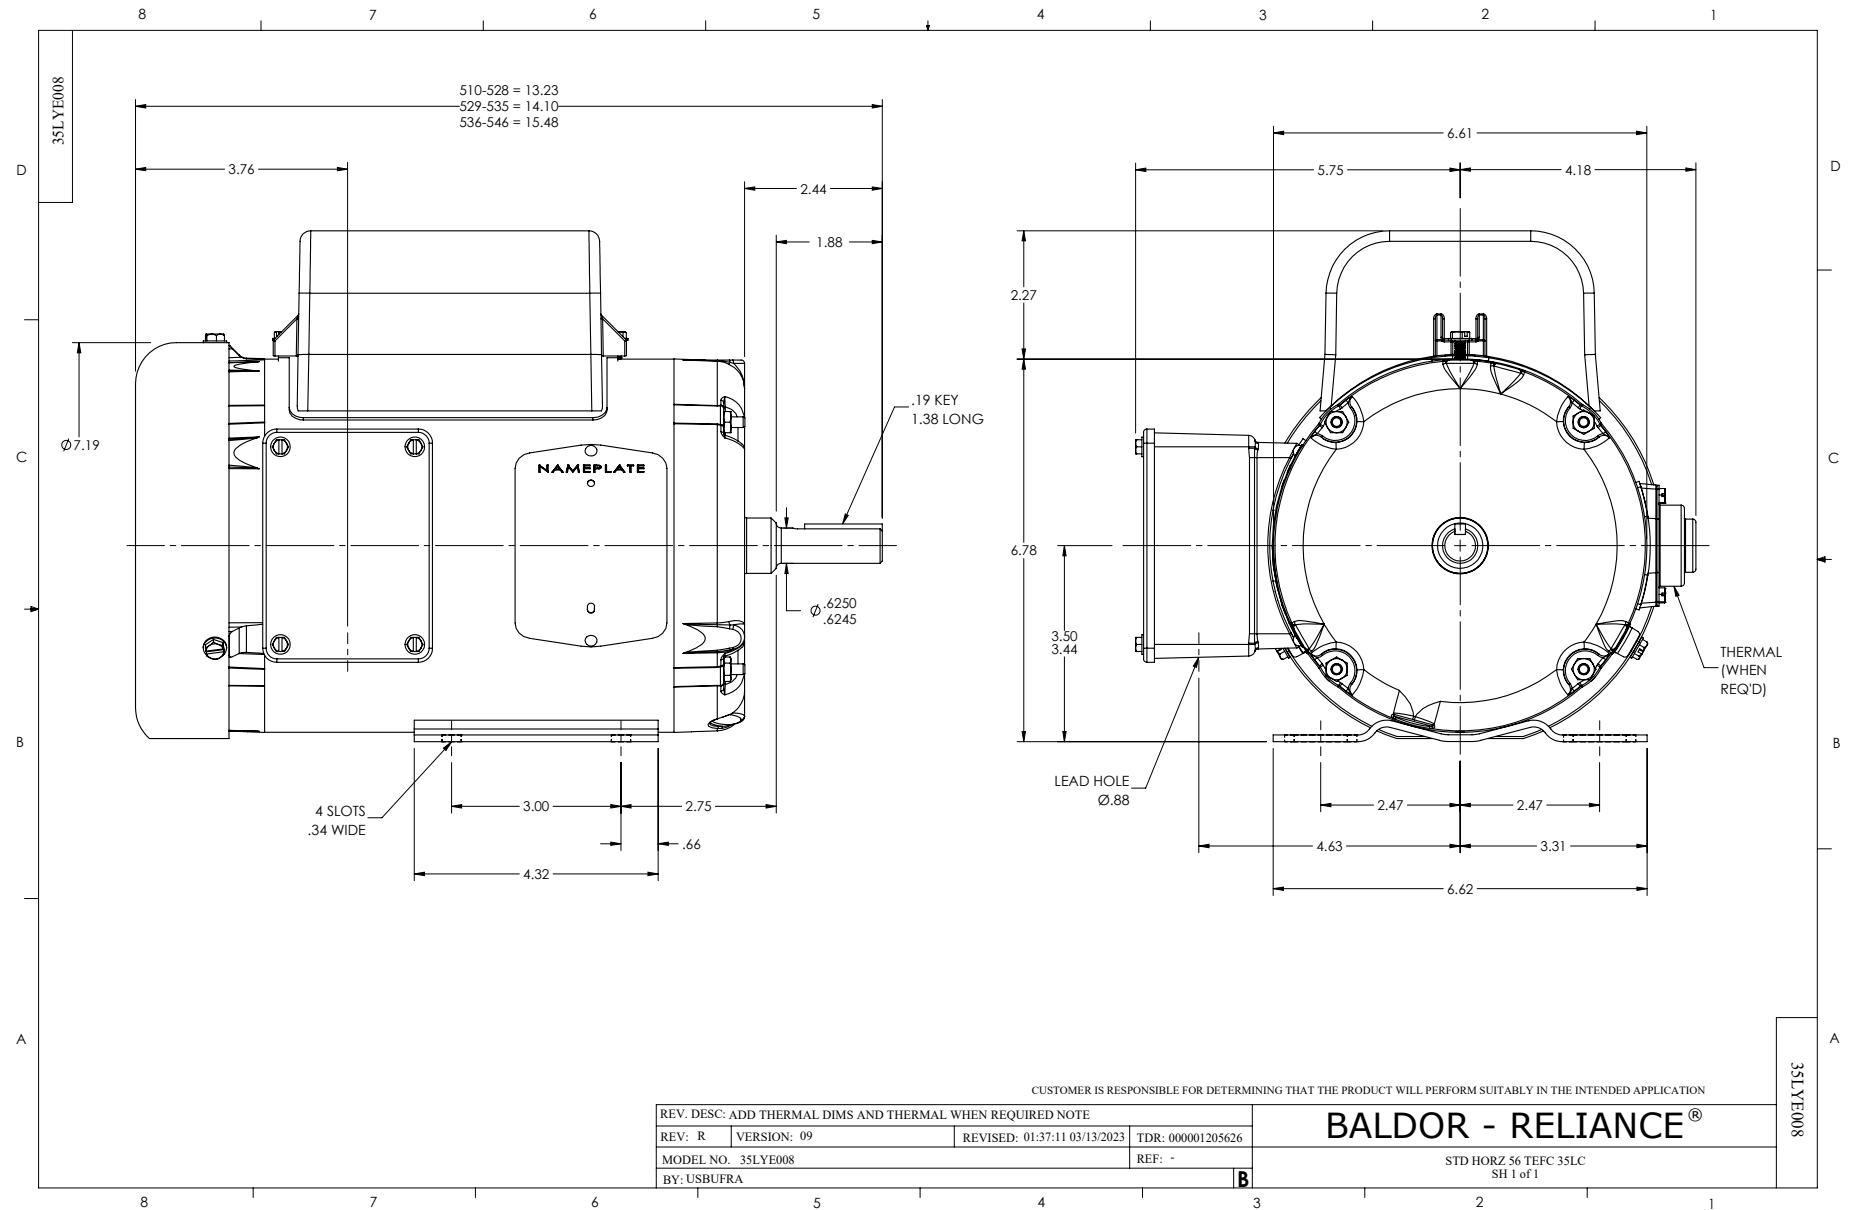

CD0055

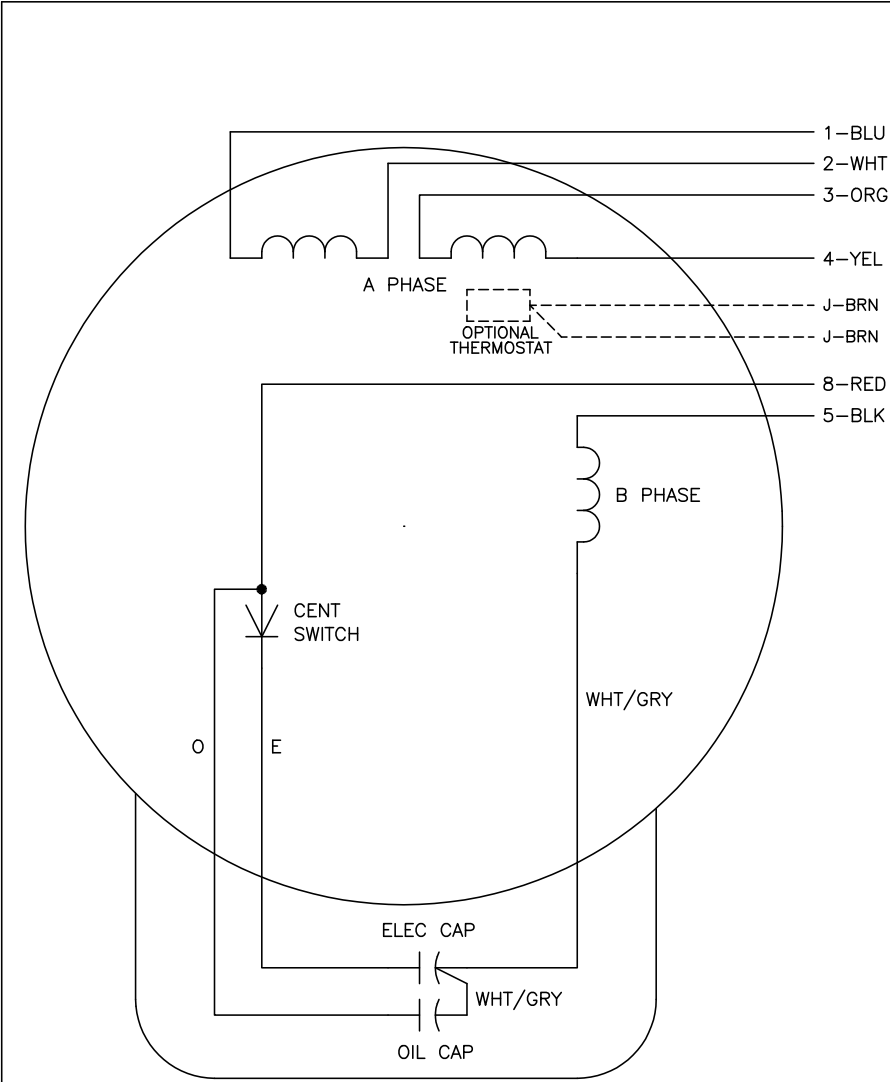

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	—
LOW OPP	1,3,5	2,4,8	—

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
 3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:17	TDR: 0178636
CD0055		FILE: AAA00007414	MDL: —
		MTL: —	

BALDOR ELECTRIC Co.
TYPE LC, DV, REV, 6 LEADS

CD0055