



Customer information packet

L3605T-50

2/1.5KW, 1460RPM, 1PH, 50HZ, 182T, 3646LC, TEF

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	182T
Frame Material	Steel
Frequency	50.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	1.500 KW @ 50 HZ
Phase	1
Synchronous Speed @ Frequency	1500 RPM @ 50 HZ
Voltage @ Frequency	110.0 V @ 50 HZ 220.0 V @ 50 HZ
Agency Approvals	C UR US CE CURUS UKCA WEEE
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	9.200 A @ 220.0 V 18.400 A @ 110.0 V
Design Code	-
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.8 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None

Part detail

Revision	H
Type	AC
Mech. spec.	36E004
Base	
Status	PRD/A
Elec. spec.	36WGQ056
Layout	36LYE004
Eff. date	07-17-2025
CD Diagram	CD0055
Poles	04
Leads	4#14 A PH,2#16 B PH
Proprietary	False
Created date	03-07-2023

Heater Indicator	No Heater
High Voltage Full Load Amps	9.2 a
Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	4 @ 14 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3646LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	18.06 IN
Power Factor	90
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1460 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1372L										
CAT.NO.	L3605T-50									
SPEC.	36E004Q056									
HP	2/1.5KW									
VOLTS	110/220									
AMP	18.4/9.2									
R.P.M. (1/MIN)	1460									
FRAME	182T		HZ		50			PH		1
SER.F.	1.15	CODE		K	DES		-	CL	F	
NEMA-NOM-EFF	82.8	PF		90						
RATING	40C AMB-S1 CONT									
CC		IP44 IC410 45KG								
DE	6206		ODE		6205					
ENCL	TEFC	SN								
	IE2-50HZ 83 (75%),82 (50%)									

Accessories

Part number	Description	Multiplier
36-3301	C FACE KIT	A8
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8

AC Induction Motor Performance Data

Record # 101574

Typical performance - not guaranteed values

Winding: 36WGQ056-R001				Type: 3646LC		Enclosure: TEFC			
Nameplate Data				220 V, 50 Hz: High Voltage Connection					
Rated Output (KW)		1.5		Full Load Torque		7.229 LB-FT			
Volts		110/220		Start Configuration		direct on line			
Full Load Amps		18.4/9.2		Breakdown Torque		19.6 LB-FT			
R.P.M.		1460		Pull-up Torque		11.6 LB-FT			
Hz		50 Phase		1		Locked-rotor Torque		24.3 LB-FT	
NEMA Design Code		- KVA Code		K		Starting Current		72.7 A	
Service Factor (S.F.)		1.15				No-load Current		2.9 A	
NEMA Nom. Eff.		82.8 Power Factor		90		Line-line Res. @ 25°C		0.85625 Ω A Ph 0.80862 Ω B Ph	
Rating - Duty		40C AMB-CONT				Temp. Rise @ Rated Load		37°C	
S.F. Amps						Temp. Rise @ S.F. Load		47°C	

Load Characteristics 220 V, 50 Hz, 1.5 KW

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	64	80	87	90	91	91	91
Efficiency	74	82.4	84	83.2	81.1	78	81.9
Speed	1491.1	1482.5	1472.8	1461.6	1448.5	1433.4	1454
Line amperes	3.65	5.17	7.03	9.15	11.6	14.3	10.6


ABB Motors and Mechanical Inc.


WINDING # 36WGQ056

Typical performance - not guaranteed values.


1.5 KW 1 PH 50 HZ 1460 RPM 220 V 3646LC

TORQUES (LB-FT): PO=19.6 PU=11.6 LR=24.3 LRA=72.7

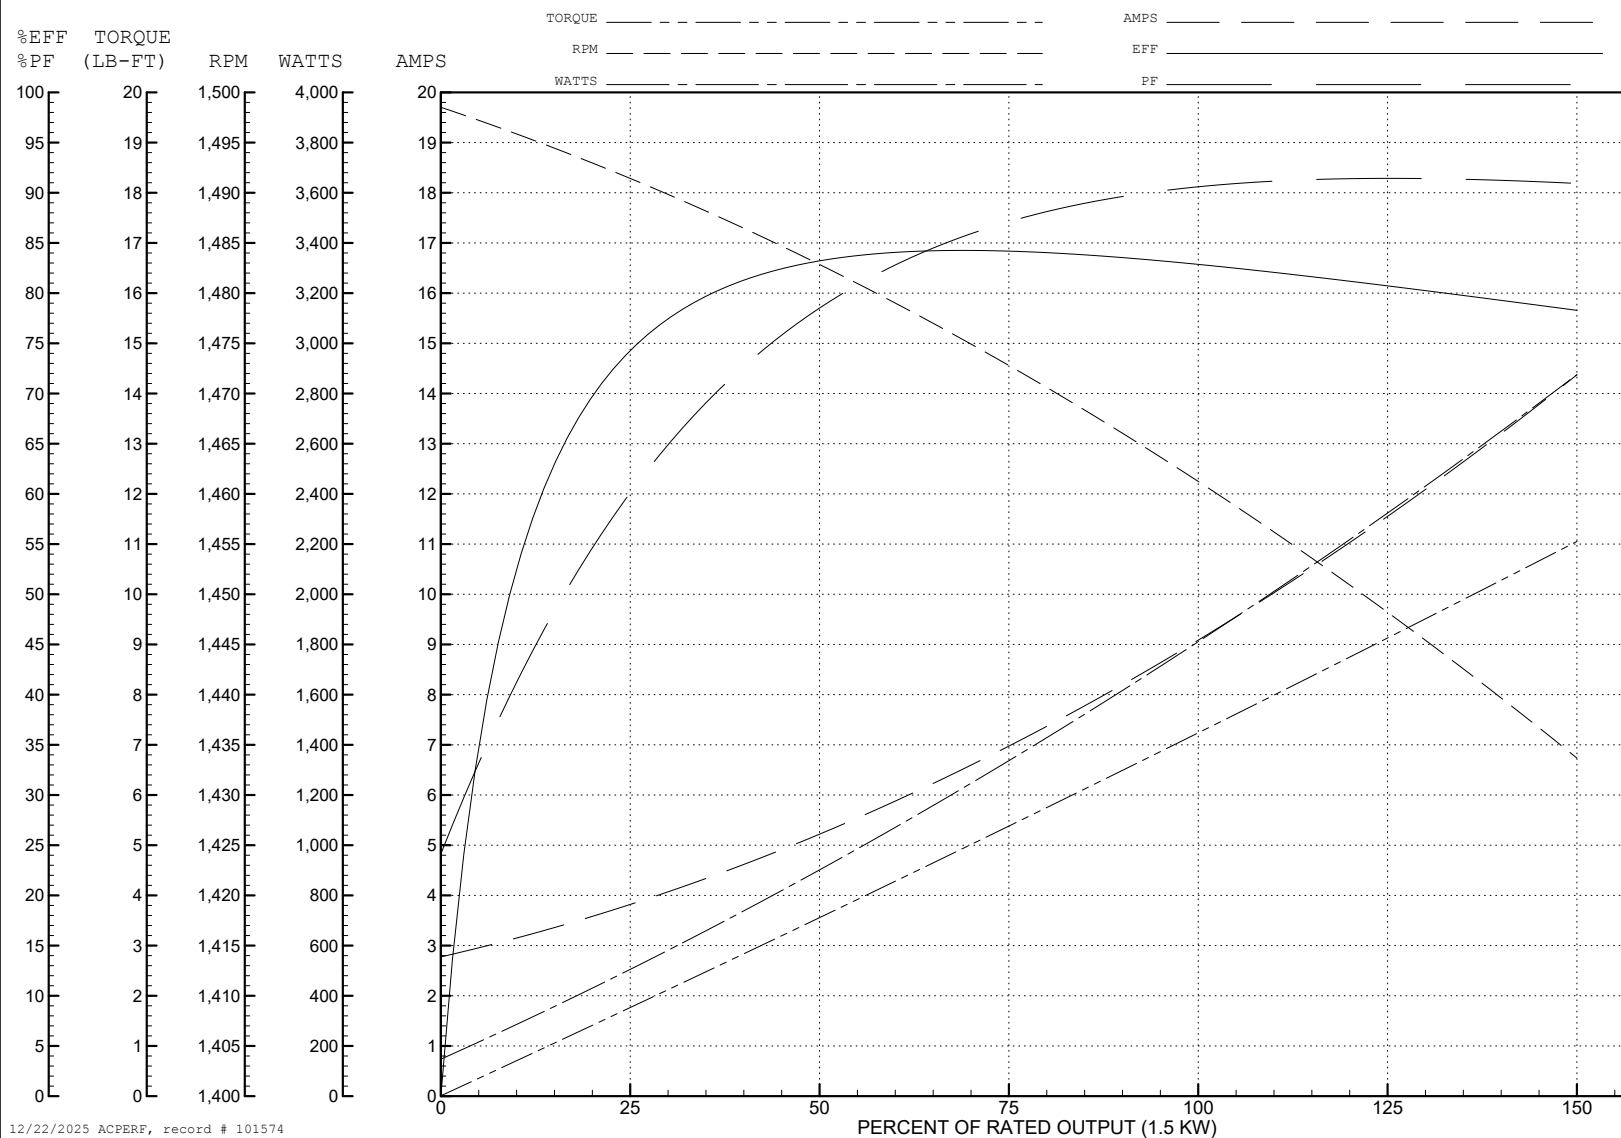

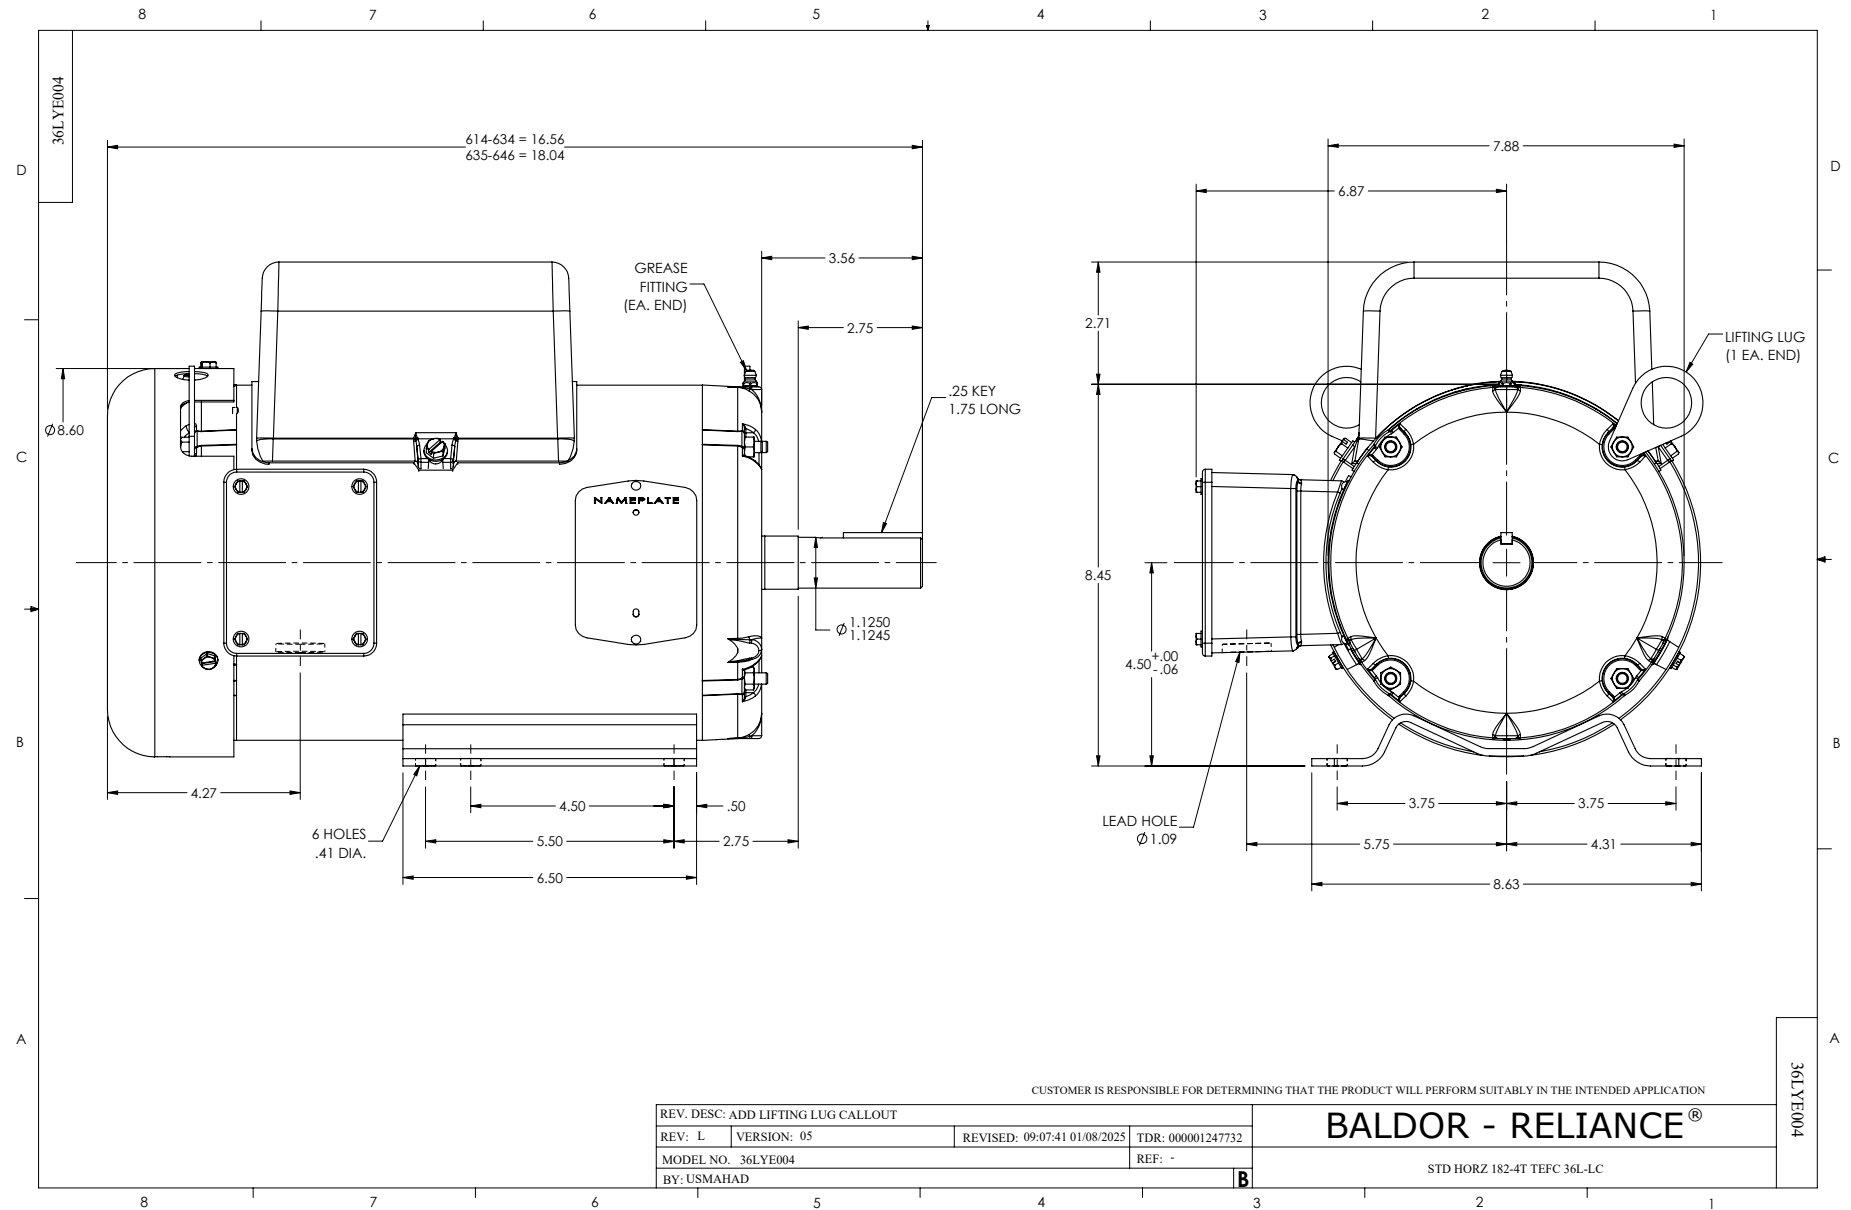

CD0055

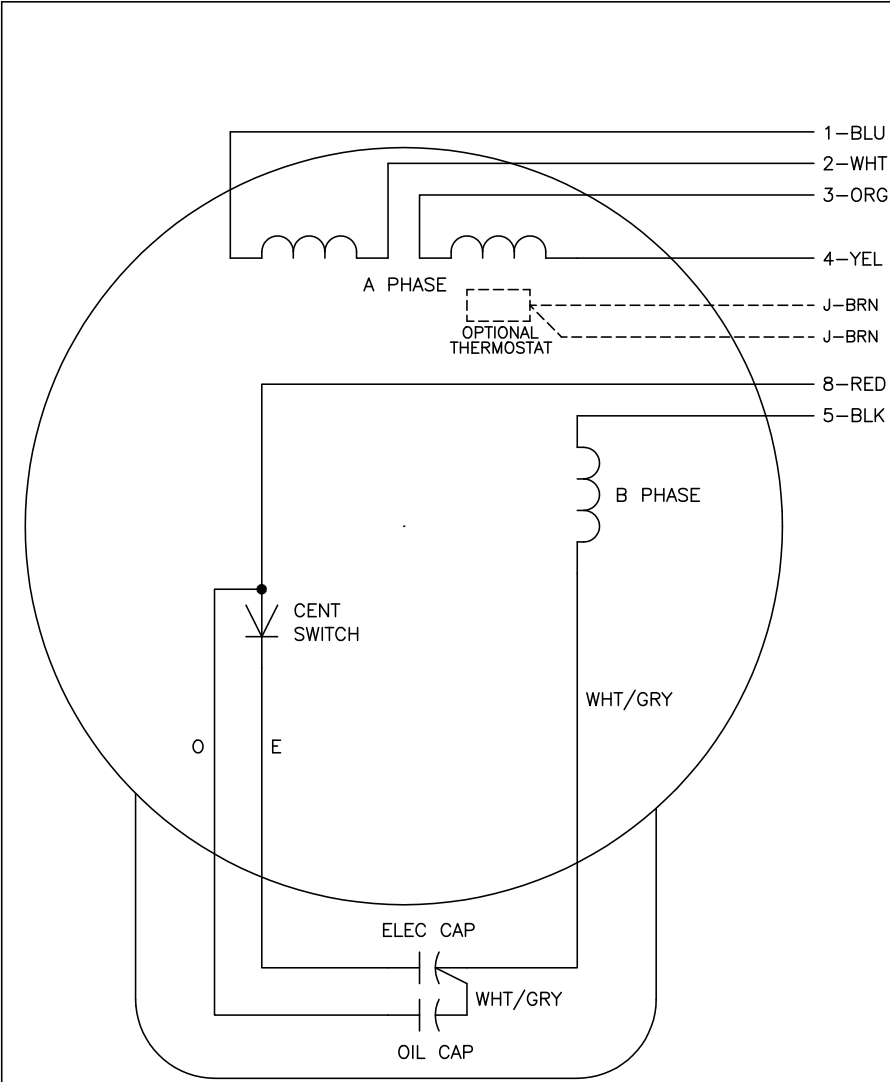

	LINE A	LINE B	JOIN
HIGH STD	1	4,5	2,3,8
HIGH OPP	1	4,8	2,3,5
LOW STD	1,3,8	2,4,5	—
LOW OPP	1,3,5	2,4,8	—

- NOTES:
1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
 2. OPTIONAL THERMOSTAT IS PROVIDED WHEN SPECIFIED.
 3. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: D	BY: JLP	REVISED: 04/08/99 1:17	TDR: 0178636
SS0000		FILE: AAA00007414	MDL: —
		MTL: —	

BALDOR ELECTRIC Co.	
TYPE LC, DV, REV, 6 LEADS	

CD0055