



Customer information packet

L3703

2HP, 1165RPM, 1PH, 60HZ, 3728LC, N

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	2.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1200 RPM @ 60 HZ
Voltage @ Frequency	115.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	10.500 A @ 230.0 V 11.200 A @ 208.0 V 23.000 A @ 115.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	74.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	10.5 a

Part detail

Revision	D
Type	AC
Mech. spec.	37C011
Base	
Status	PRD/A
Elec. spec.	37WGW005
Layout	37LYC011
Eff. date	05-10-2024
CD Diagram	CD0076
Poles	06
Leads	8#14
Proprietary	False
Created date	12-16-2020

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	8 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3728LC
Mounting Arrangement	F1
Number of Poles	6
Overall Length	17.51 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1165 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	L3703										
SPEC.	37C11W005										
HP	2										
VOLTS	115/230										
AMP	23/10.5										
RPM	1165										
FRAME	213		HZ	60			PH	1			
SER.F.	1.00	CODE	J	DES	L		CLASS	F			
NEMA-NOM-EFF	74	PF	87								
RATING	40C AMB-CONT										
CC											
DE	6307		ODE	6206							
ENCL	TEFC	SN									

Accessories

Part number	Description	Multiplier
37-3301	C FACE KIT	P1

AC Induction Motor Performance Data

Record # 85888

Preliminary Data Sheet

Winding: 37WGW005-R002				Type: 3728LC		Enclosure: TEFC	
Nameplate Data				115 V, 60 Hz: Low Voltage Connection			
Rated Output (HP)		2		Full Load Torque		9.01 LB-FT	
Volts		115/230		Start Configuration		direct on line	
Full Load Amps		23/10.5		Breakdown Torque		17.5 LB-FT	
R.P.M.		1165		Pull-up Torque		14 LB-FT	
Hz		60 Phase		Locked-rotor Torque		27.3 LB-FT	
NEMA Design Code		L KVA Code		Starting Current		108 A	
Service Factor (S.F.)		1		No-load Current		14.6 A	
NEMA Nom. Eff.		74 Power Factor		Line-line Res. @ 25°C		0.327 Ω A Ph 0.653 Ω B Ph	
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		53°C	
				Locked-rotor Power Factor		96.8	
				Rotor inertia		0.689 lb-ft²	

Load Characteristics 115 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	33	51	63	71	75	77
Efficiency	63.8	75.8	79.5	80	78.8	75.9
Speed	1192	1185	1176	1167	1155	1139
Line amperes	15.3	16.9	19.5	22.9	27.3	33.1


ABB Motors and Mechanical Inc.


WINDING # 37WGW005

Typical performance - not guaranteed values.


2 HP 1 PH 60 HZ 1165 RPM 115 V 3728LC

TORQUES (LB-FT): PO=17.5 PU=14 LR=27.3 LRA=108

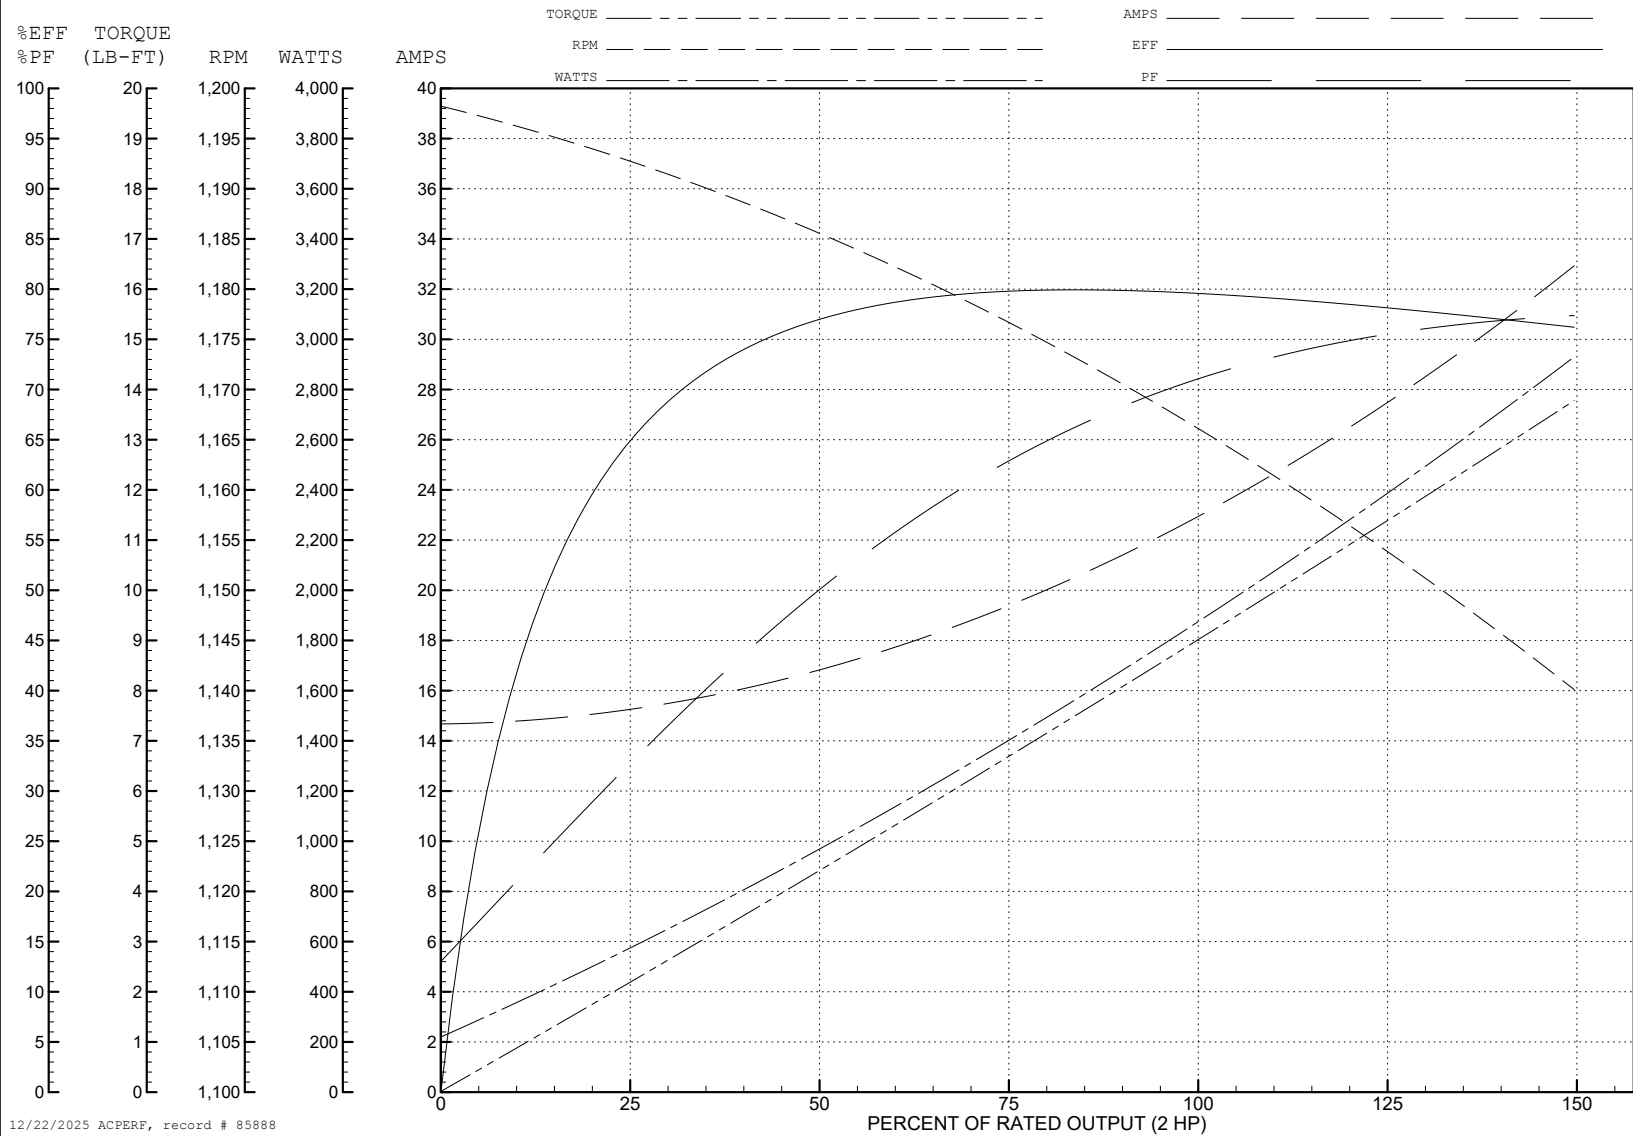

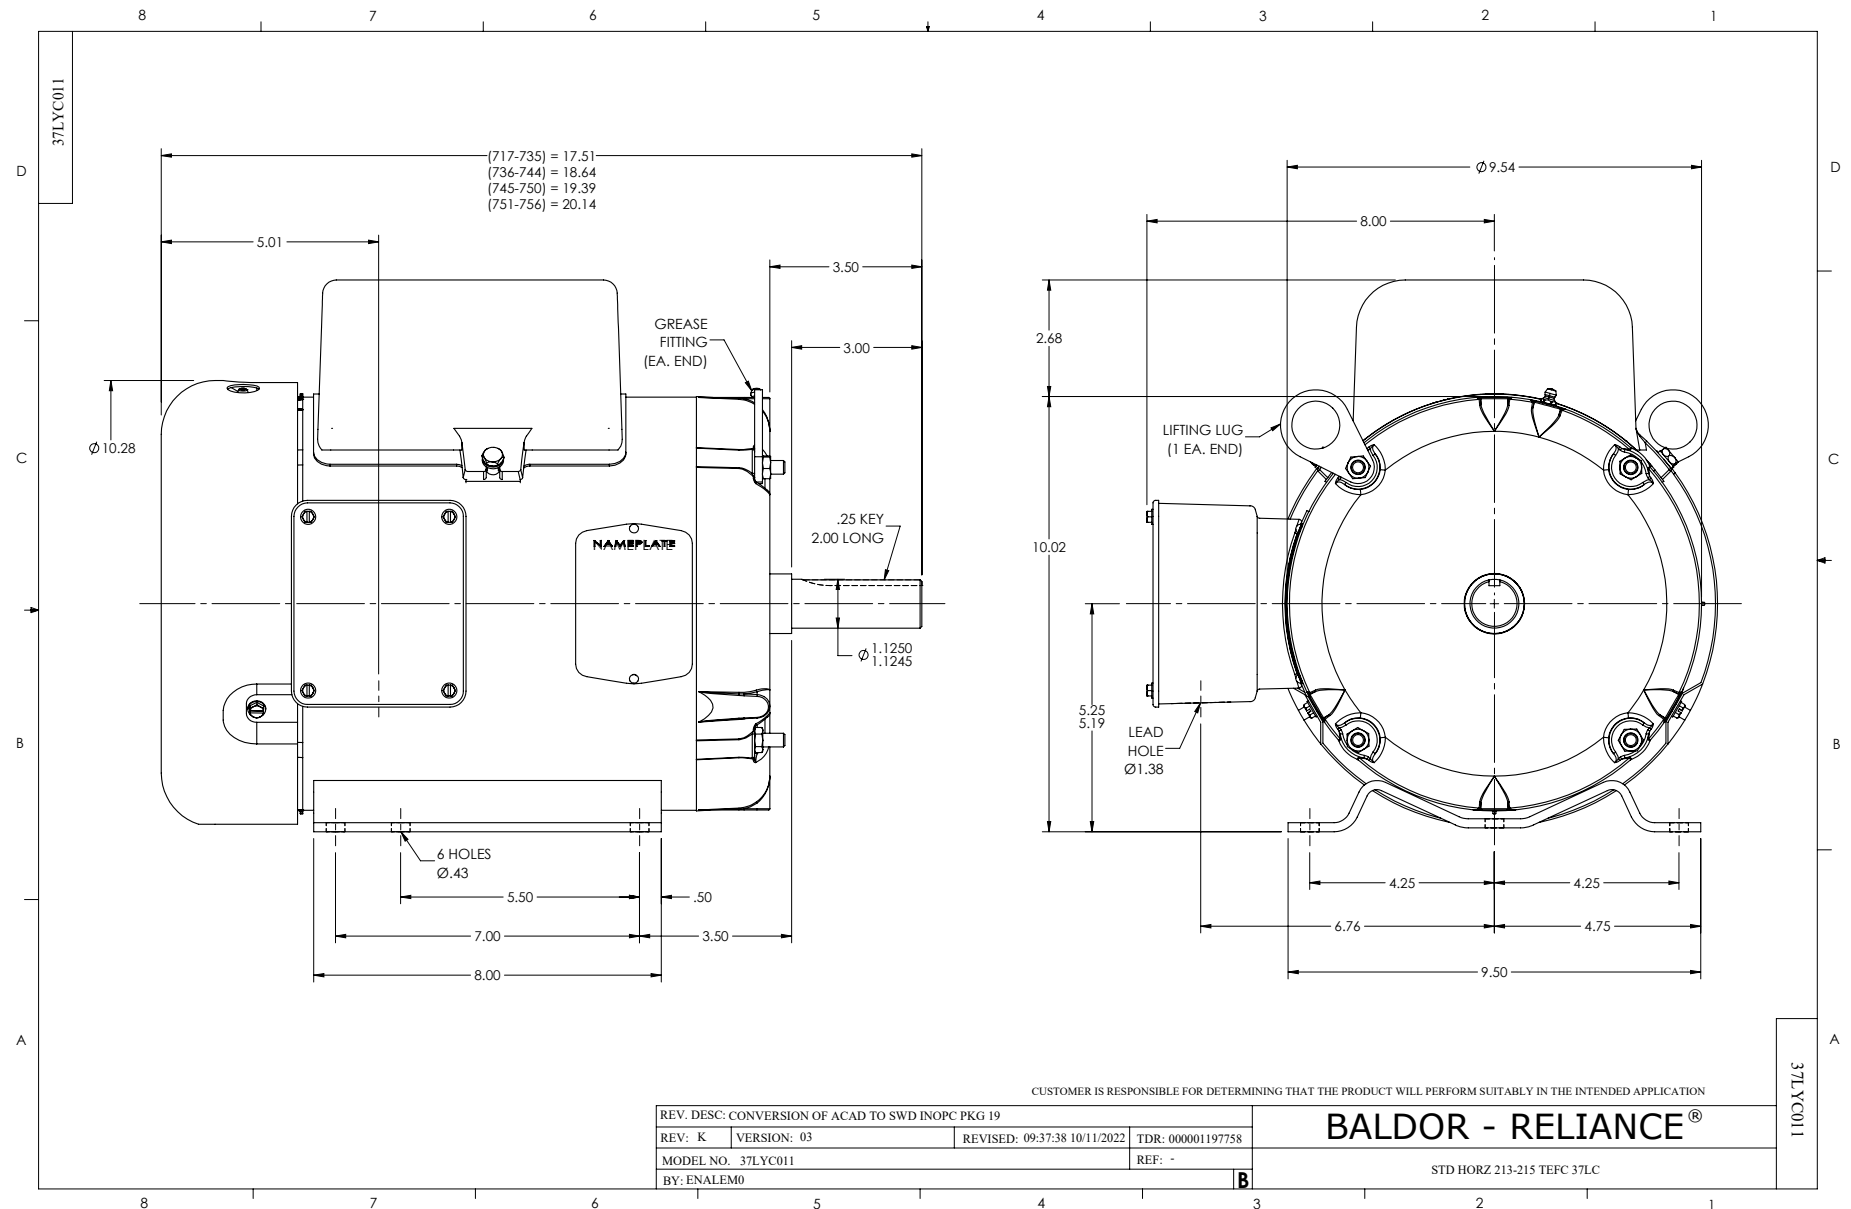

CD0076

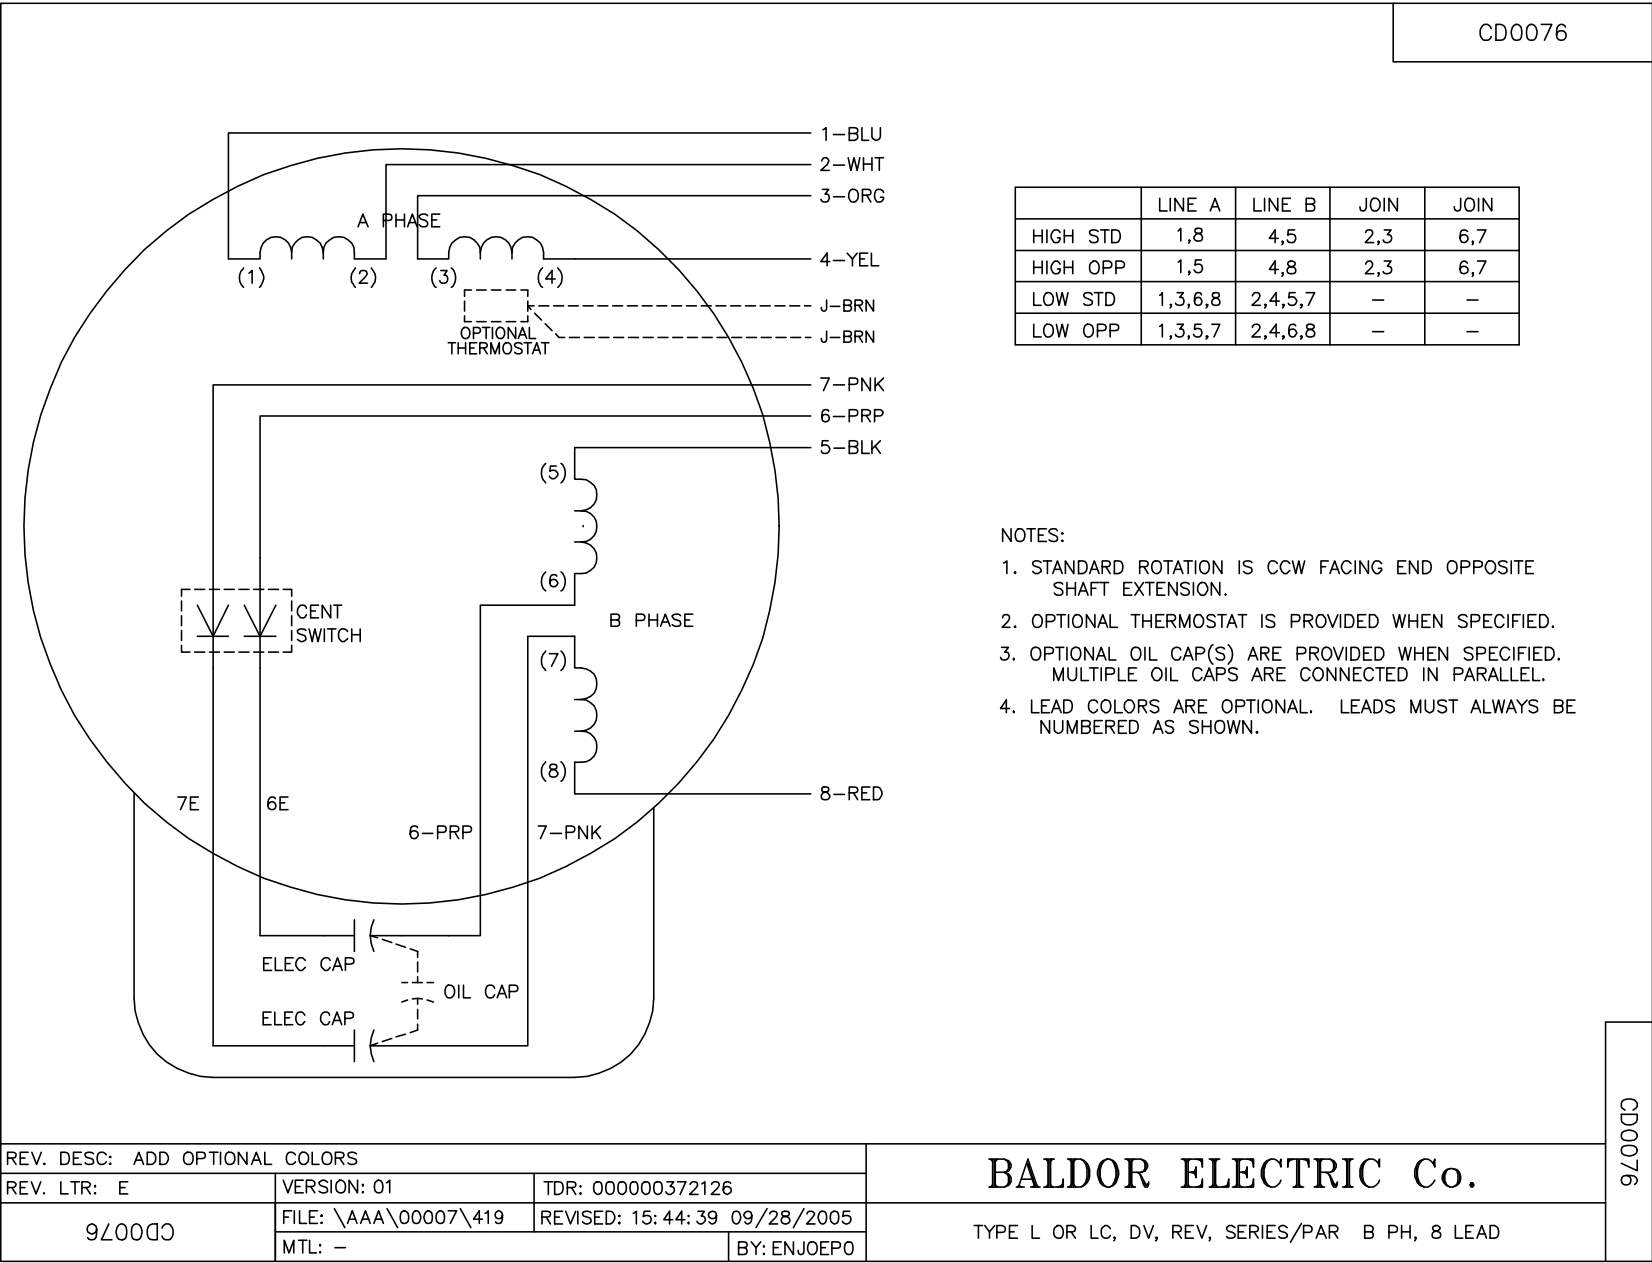

CD0076