



Customer information packet

L3708TM

5HP, 1725RPM, 1PH, 60HZ, 213T, 3744LC, TEFC, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	213T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	5.000 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	21.500 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	82.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	21.5 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	AY
Type	AC
Mech. spec.	37E039
Base	
Status	PRD/A
Elec. spec.	37WG0679
Layout	37LYE039
Eff. date	05-10-2024
CD Diagram	CD0002A02
Poles	04
Leads	2#12 A PH,3#14 B&J
Proprietary	False
Created date	01-01-0001

KVA Code	J
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 12 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3744LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.02 IN
Power Factor	87
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Do Not Use
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Manual Thermal Overload
Winding Thermal 1 Location	KO
Winding Thermal 2	None

Nameplate

NP1257L											
CAT.NO.	L3708TM										
SPEC.	37E39-679										
HP	5										
VOLTS	230										
AMP	21.5										
RPM	1725										
FRAME	213T			HZ	60			PH	1		
SER.F.	1.00	CODE	J	DES	L	CL	F				
NEMA-NOM-EFF	82	PF	87								
RATING	40C AMB-CONT										
CC											
DE	6307	ODE	6206								
ENCL	TEFC	SN									

Accessories

Part number	Description	Multiplier
37-3301	C FACE KIT	P1

AC Induction Motor Performance Data

Record # 61347

Typical performance - not guaranteed values

Winding: 37WG0679-R002			Type: 3744LC		Enclosure: TEFC			
Nameplate Data				230 V, 60 Hz: Single Voltage Motor				
Rated Output (HP)		5	Full Load Torque		15 LB-FT			
Volts		230	Start Configuration		direct on line			
Full Load Amps		21.5	Breakdown Torque		40 LB-FT			
R.P.M.		1725	Pull-up Torque		28 LB-FT			
Hz	60	Phase	1	Locked-rotor Torque		50 LB-FT		
NEMA Design Code		L	KVA Code	J	Starting Current		155 A	
Service Factor (S.F.)		1	No-load Current		6.5 A			
NEMA Nom. Eff.		82	Power Factor		87	Line-line Res. @ 25°C		0.464 Ω A Ph 2.17 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		69°C		


Load Characteristics 230 V, 60 Hz, 5 HP


% of Rated Load	25	50	75	100	125	150
Power Factor	68	83	89	91	91	90
Efficiency	69.2	80	82.9	83	81.5	78.6
Speed	1787	1775	1761	1745	1727	1702
Line amperes	8.6	12.2	16.5	21.6	27.3	34.3

ABB Motors and Mechanical Inc.

WINDING # 37WG0679

Typical performance - not guaranteed values.

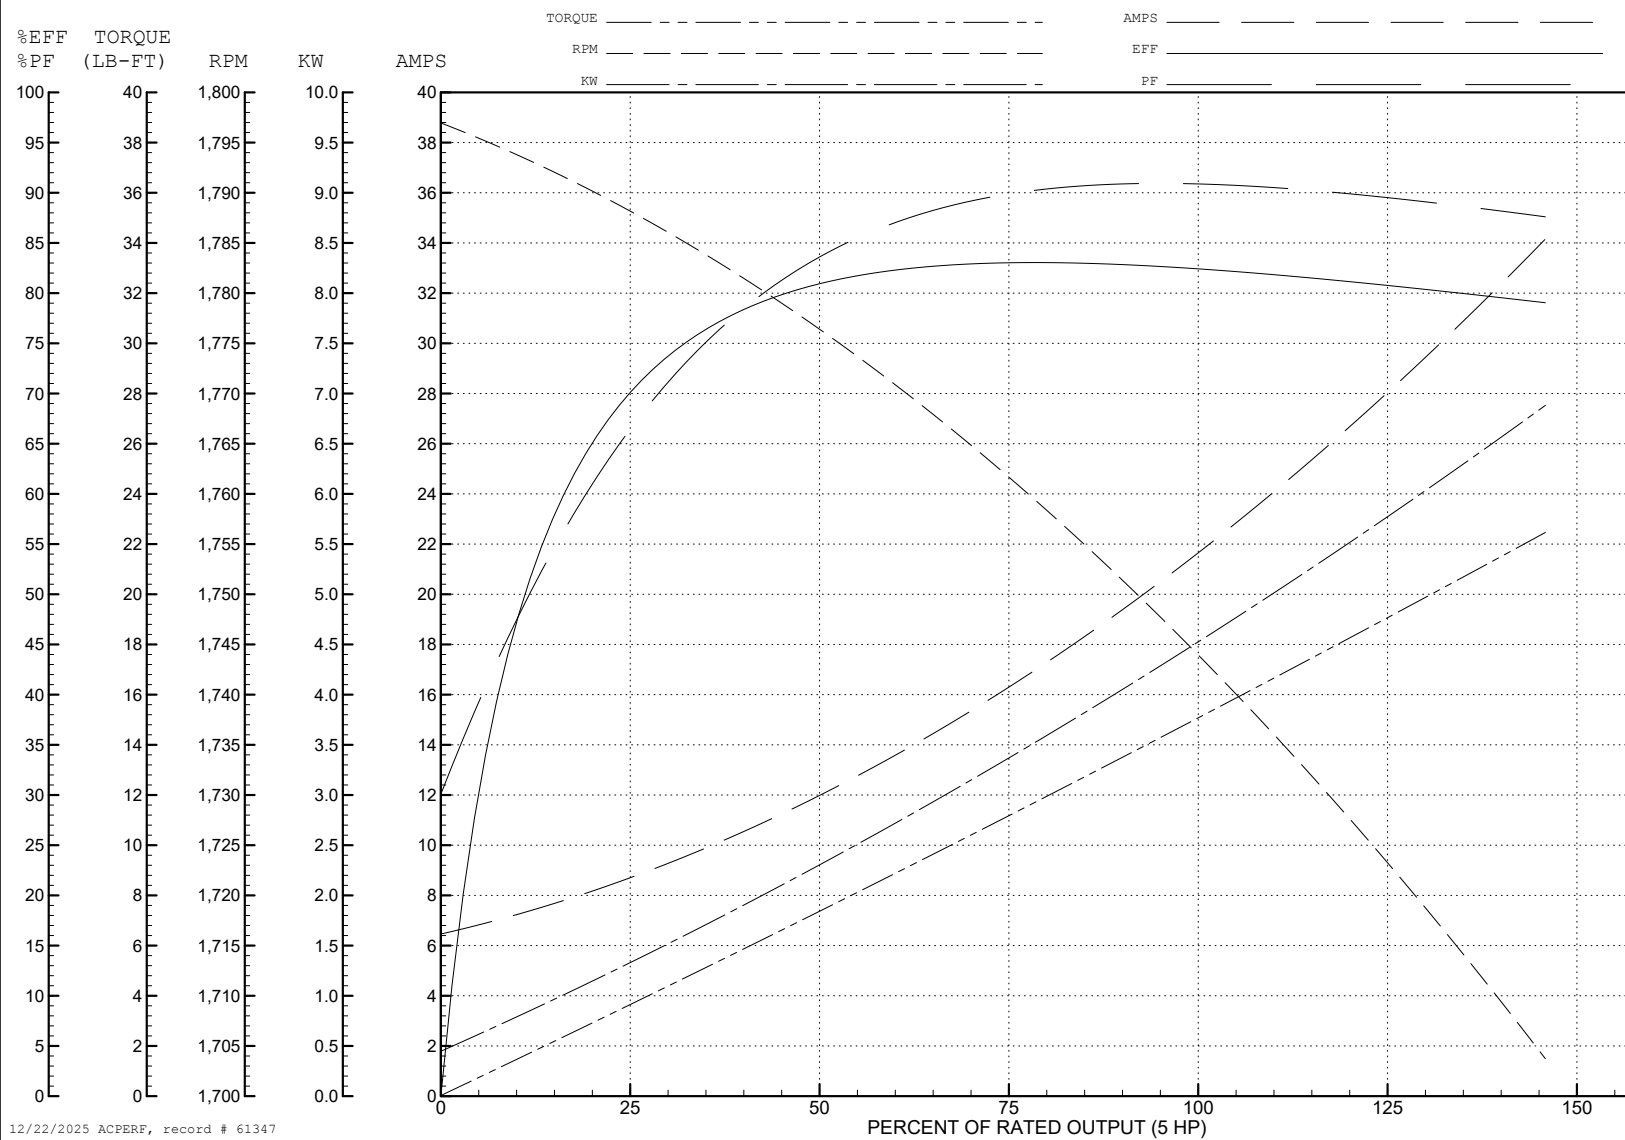5 HP 1 PH 60 HZ 1725 RPM 230 V 3744LC
TORQUES (LB-FT) : PO=40 PU=28 LR=50 LRA=155

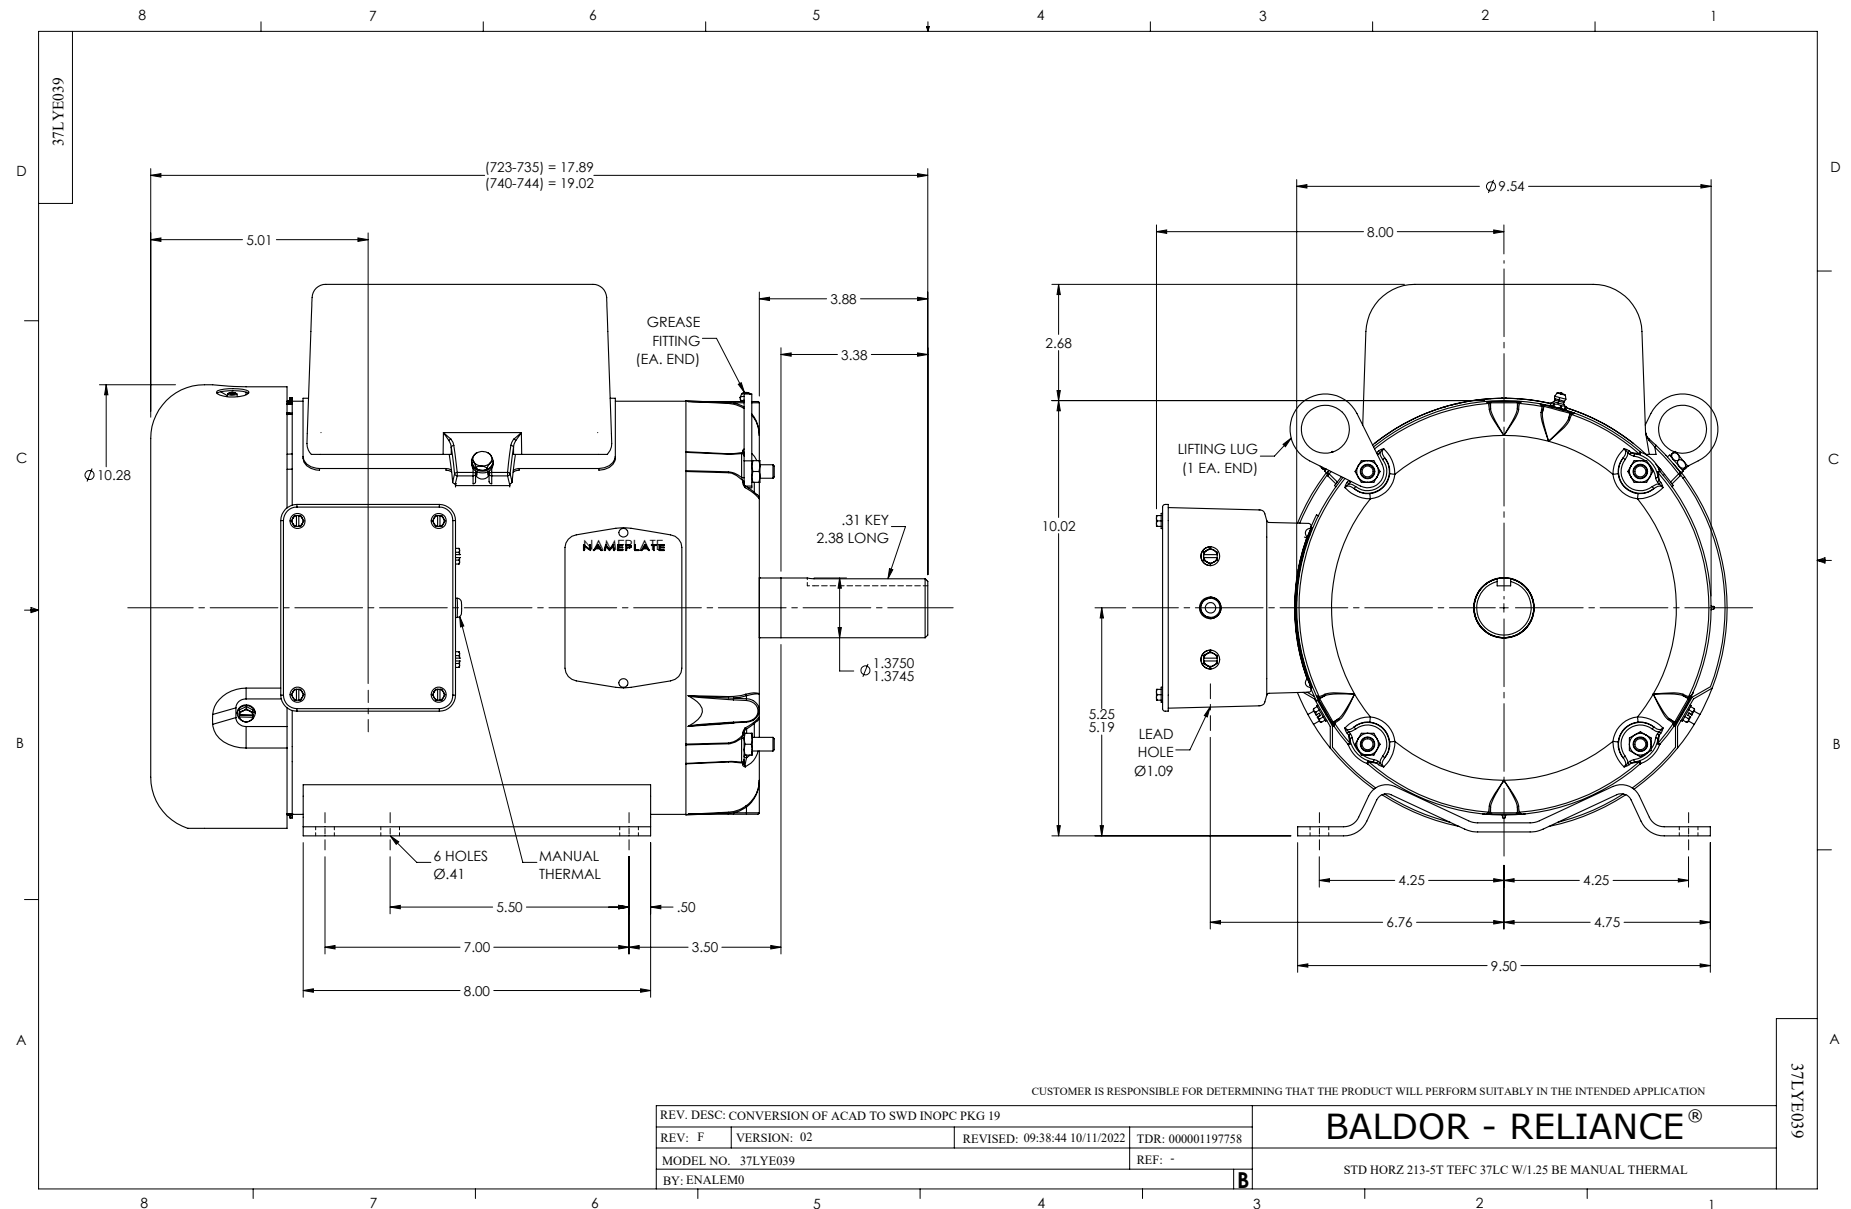

CD0002A02

