



Customer information packet

L3710T

7.5HP, 1745RPM, 1PH, 60HZ, 215T, 3734LC, TEFC

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	215T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Cap Start, Cap Run
Output @ Frequency	7.500 HP @ 60 HZ
Phase	1
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	31.000 A @ 208.0 V 29.000 A @ 230.0 V
Design Code	L
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	86.5 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	29.0 a
Insulation Class	F

Part detail

Revision	L
Type	AC
Mech. spec.	37M307
Base	
Status	PRD/A
Elec. spec.	37WGT876
Layout	37LYM307
Eff. date	09-19-2025
CD Diagram	CD0086
Poles	04
Leads	2#10 A PH,2#14 B PH
Proprietary	False
Created date	01-21-2010

Inverter Code	Not Inverter
KVA Code	G
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	2 @ 10 AWG, A PH
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3734LC
Mounting Arrangement	F1
Number of Poles	4
Overall Length	19.02 IN
Power Factor	97
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.375 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1745 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	L3710T										
SPEC.	37M307T876										
HP	7.5										
VOLTS	208-230										
AMP	31-29										
RPM	1745										
FRAME	215T		HZ	60			PH	1			
SER.F.	1.00	CODE	G	DES	L	CLASS	F				
NEMA-NOM-EFF	86.5	PF	97								
RATING	40C AMB-CONT										
CC											
DE	6307		ODE	6206							
ENCL	TEFC	SN									

Accessories

Part number	Description	Multiplier
37-3301	C FACE KIT	P1

AC Induction Motor Performance Data

Record # 68287

Typical performance - not guaranteed values

Winding: 37WGT876-R012				Type: 3734LC		Enclosure: TEFC	
Nameplate Data				230 V, 60 Hz: Single Voltage Motor			
Rated Output (HP)		7.5		Full Load Torque		22.61 LB-FT	
Volts		208-230		Start Configuration		direct on line	
Full Load Amps		31-29		Breakdown Torque		70.1 LB-FT	
R.P.M.		1745		Pull-up Torque		37.3 LB-FT	
Hz	60	Phase	1	Locked-rotor Torque		66.3 LB-FT	
NEMA Design Code		L KVA Code		Starting Current		184 A	
Service Factor (S.F.)		1		No-load Current		5.37 A	
NEMA Nom. Eff.		86.5	Power Factor	97	Line-line Res. @ 25°C		0.27231 Ω A Ph 0.64764 Ω B Ph
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		86°C	

Load Characteristics 230 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	91	96	97	97	97	96
Efficiency	73	84.6	87.5	87.6	85.5	81.7
Speed	1786.7	1774.6	1761.5	1745.4	1725.9	1700.6
Line amperes	9.1	14.9	21.4	28.6	36.8	46.8


ABB Motors and Mechanical Inc.


WINDING # 37WGT876

Typical performance - not guaranteed values.

7.5 HP 1 PH 60 HZ 1745 RPM 230 V 3734LC

TORQUES (LB-FT): PO=70.1 PU=37.3 LR=66.3 LRA=184

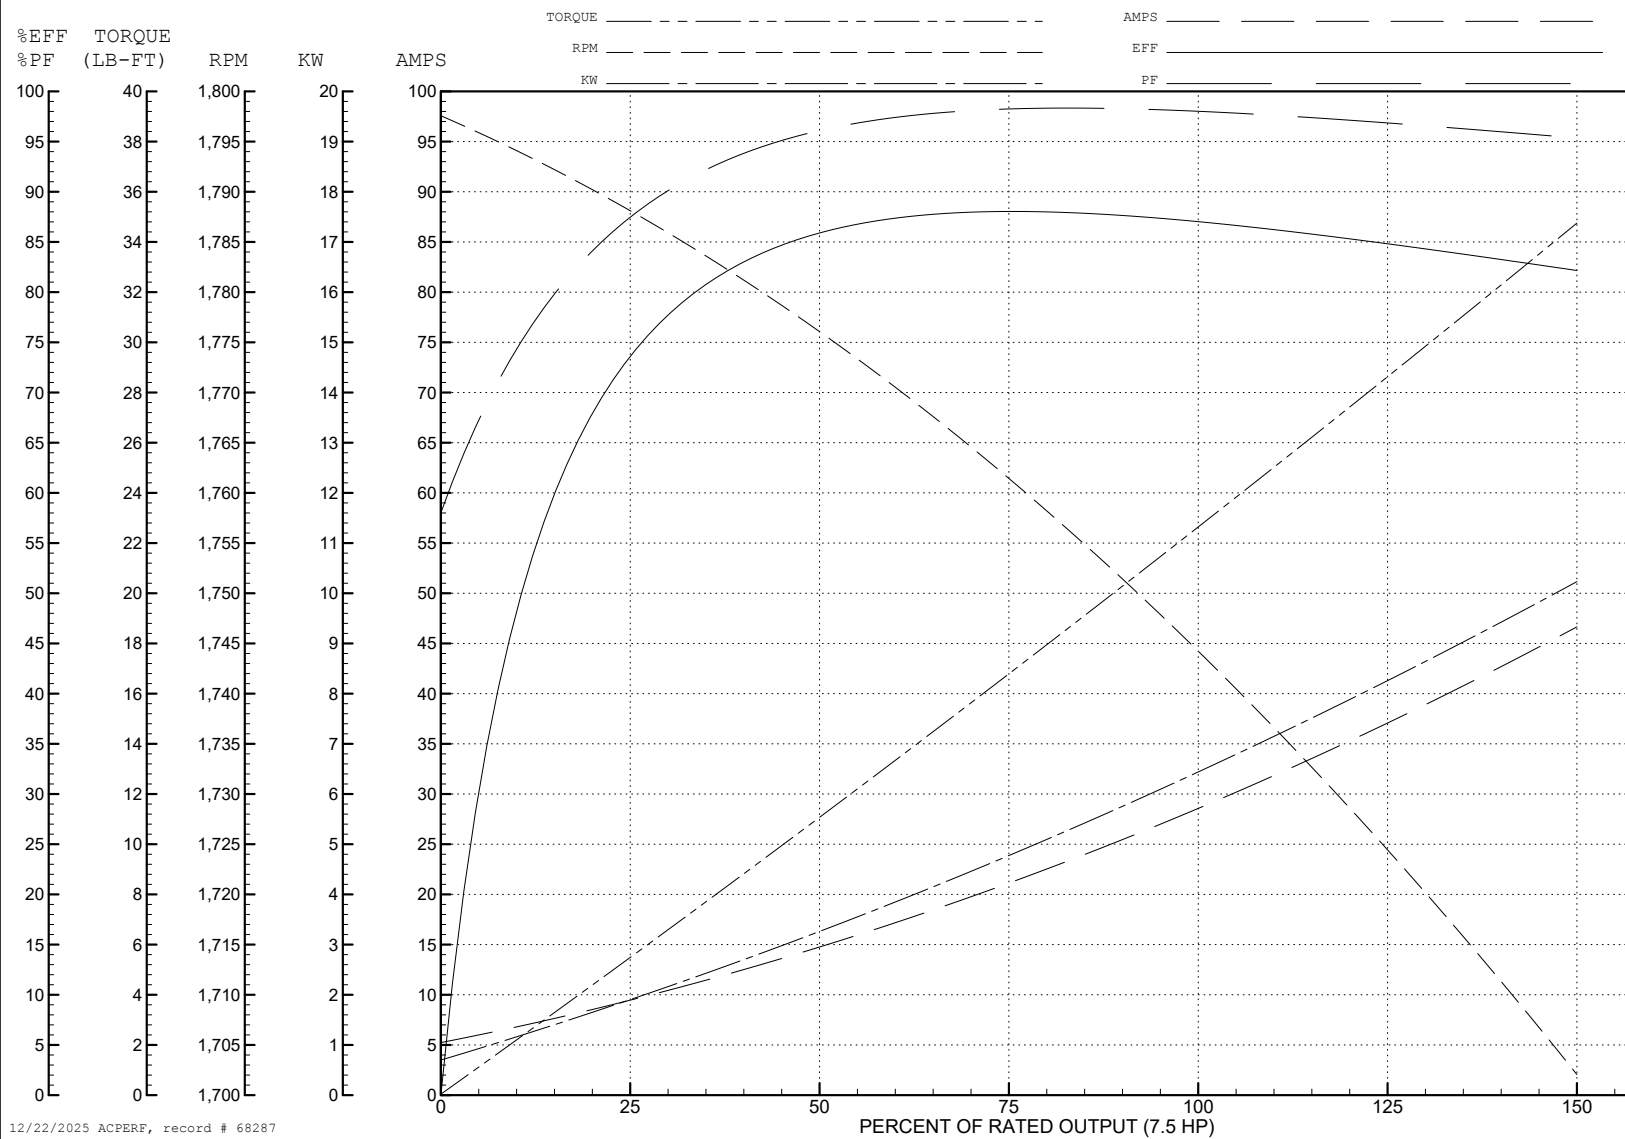

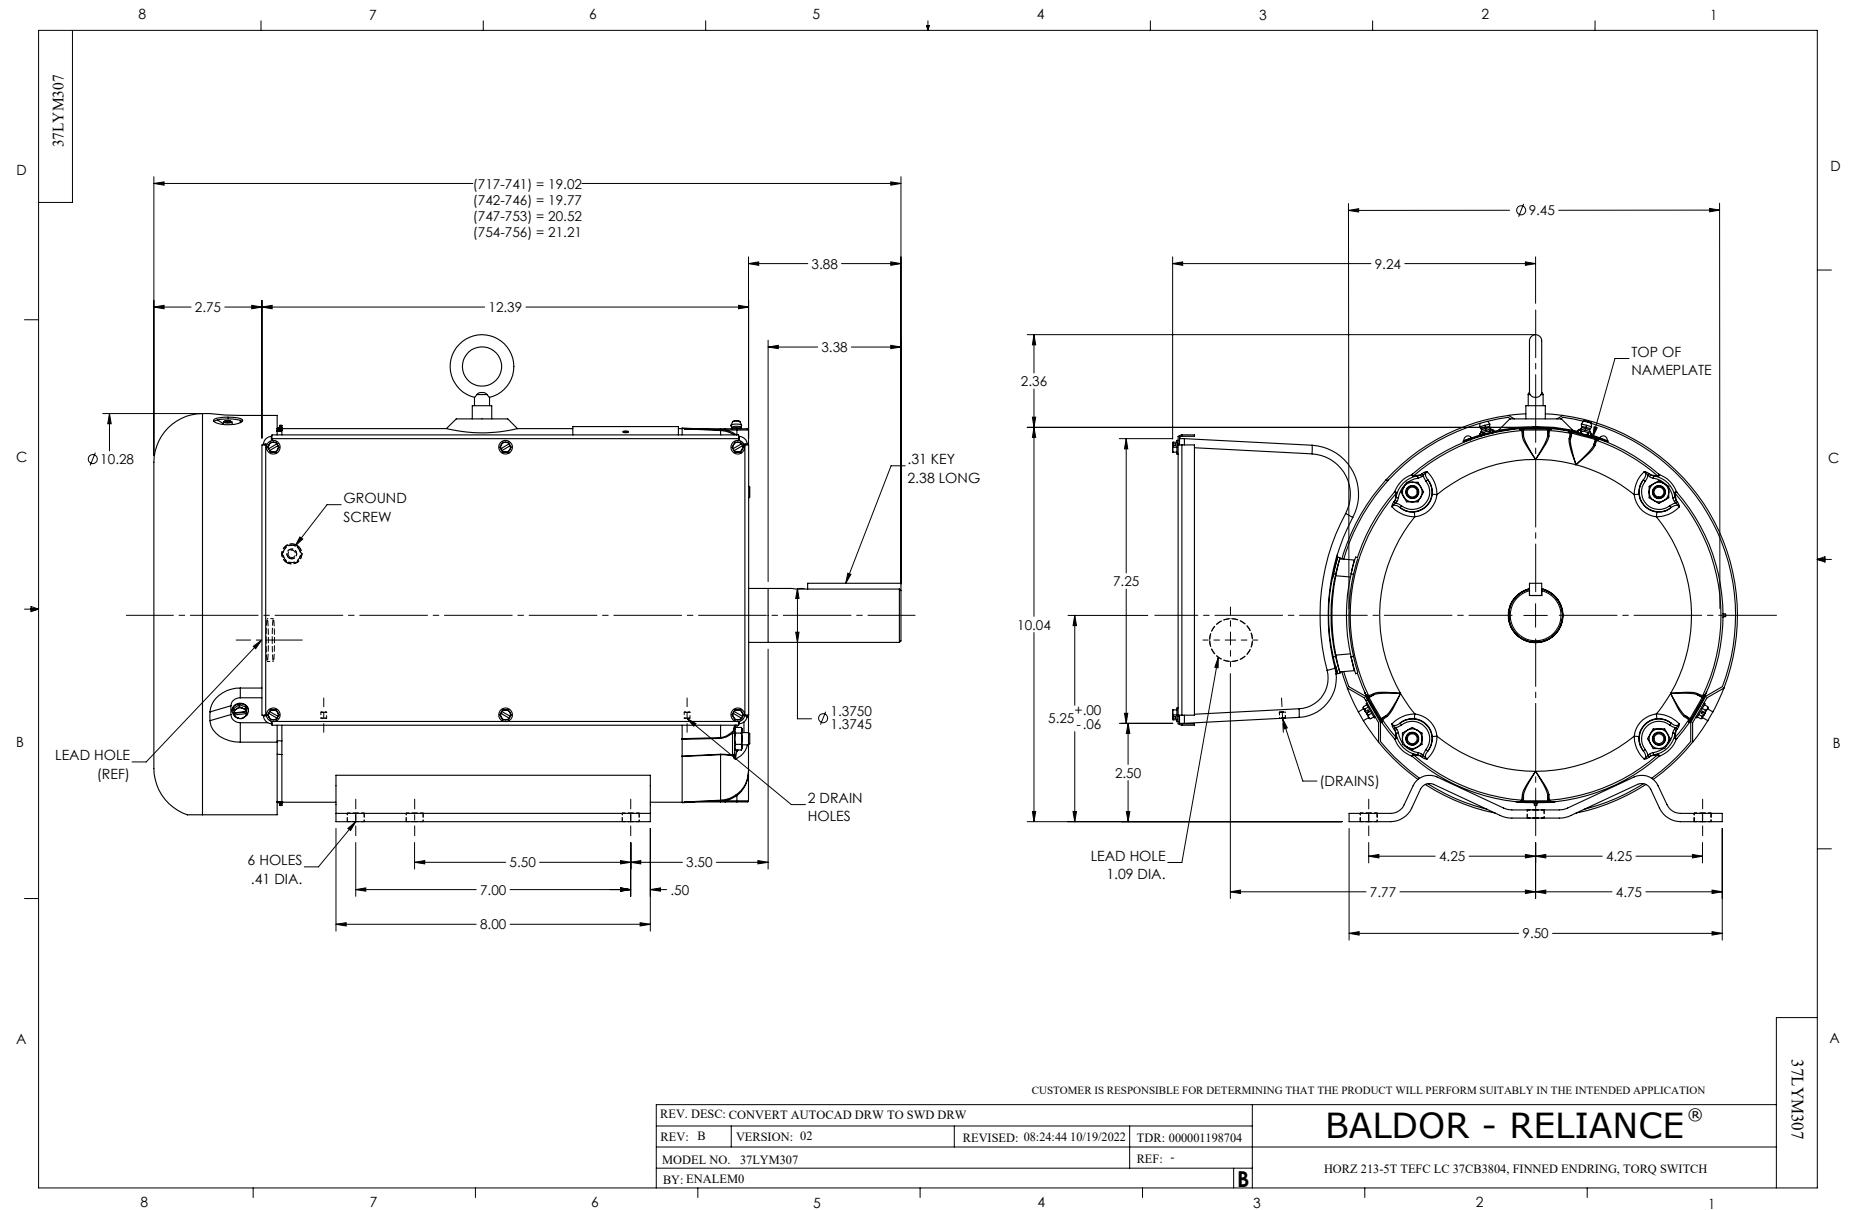

CD0086

