



Customer information packet

M1008T

5/1.3HP, 1725/850RPM, 3PH, 60HZ, 184T, 3634M

Class - None

Division - Not Applicable

Specifications

Enclosure	OPEN
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	5.000 HP @ 60 HZ 1.300 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	13.200 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	5.0 a
Insulation Class	F
Inverter Code	Not Inverter

Part detail

Revision	Z
Type	AC
Mech. spec.	36B001
Base	
Status	PRD/A
Elec. spec.	36WGW605
Layout	36LYB001
Eff. date	10-30-2025
CD Diagram	CD0032
Poles	04/08
Leads	6#14
Proprietary	False
Created date	01-01-0001

KVA Code	J
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 14 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3634M
Mounting Arrangement	F1
Number of Poles	4 8
Overall Length	15.00 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm 850 rpm
Speed Code	2S-1W-VT
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M1008T								
SPEC.	36B01W605								
HP	5/1.3								
VOLTS	230								
AMP	13.2/5								
RPM	1725/850								
FRAME	184T		HZ	60		PH	3		
SER.F.	1.15	CODE	J	DES	B	CLASS	F		
NEMA-NOM-EFF		PF							
RATING	40C AMB-CONT								
CC									
DE	6206		ODE	6205					
ENCL	OPEN	SN							

Accessories

Part number	Description	Multiplier
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 10804

Typical performance - not guaranteed values

Winding: 36WGW605-R001			Type: 3634M		Enclosure: OPEN	
Nameplate Data			230 V, 60 Hz: High Speed Connection			
Rated Output (HP)		5/1.3	Full Load Torque		15.3 LB-FT	
Volts		230	Start Configuration		direct on line	
Full Load Amps		13.2/5	Breakdown Torque		50 LB-FT	
R.P.M.		1725/850	Pull-up Torque		31 LB-FT	
Hz	60 Phase	3	Locked-rotor Torque		34 LB-FT	
NEMA Design Code		B KVA Code	Starting Current		96 A	
Service Factor (S.F.)		1	No-load Current		6.3 A	
NEMA Nom. Eff.		0 Power Factor	Line-line Res. @ 25°C		0.988 Ω	
Rating - Duty		40C AMB-CONT	Temp. Rise @ Rated Load		67°C	

Load Characteristics 230 V, 60 Hz, 5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	46	68	79	85	89	90
Efficiency	72.2	80.9	83	82.9	81.7	79.8
Speed	1780	1762	1743	1720	1698	1670
Line amperes	7	8.6	10.7	13.2	16.2	19.5


ABB Motors and Mechanical Inc.

WINDING # 36WGW605

Typical performance - not guaranteed values.

5 HP 3 PH 60 HZ 1720 RPM 230 V 3634M

TORQUES (LB-FT): PO=50 PU=31 LR=34 LRA=96

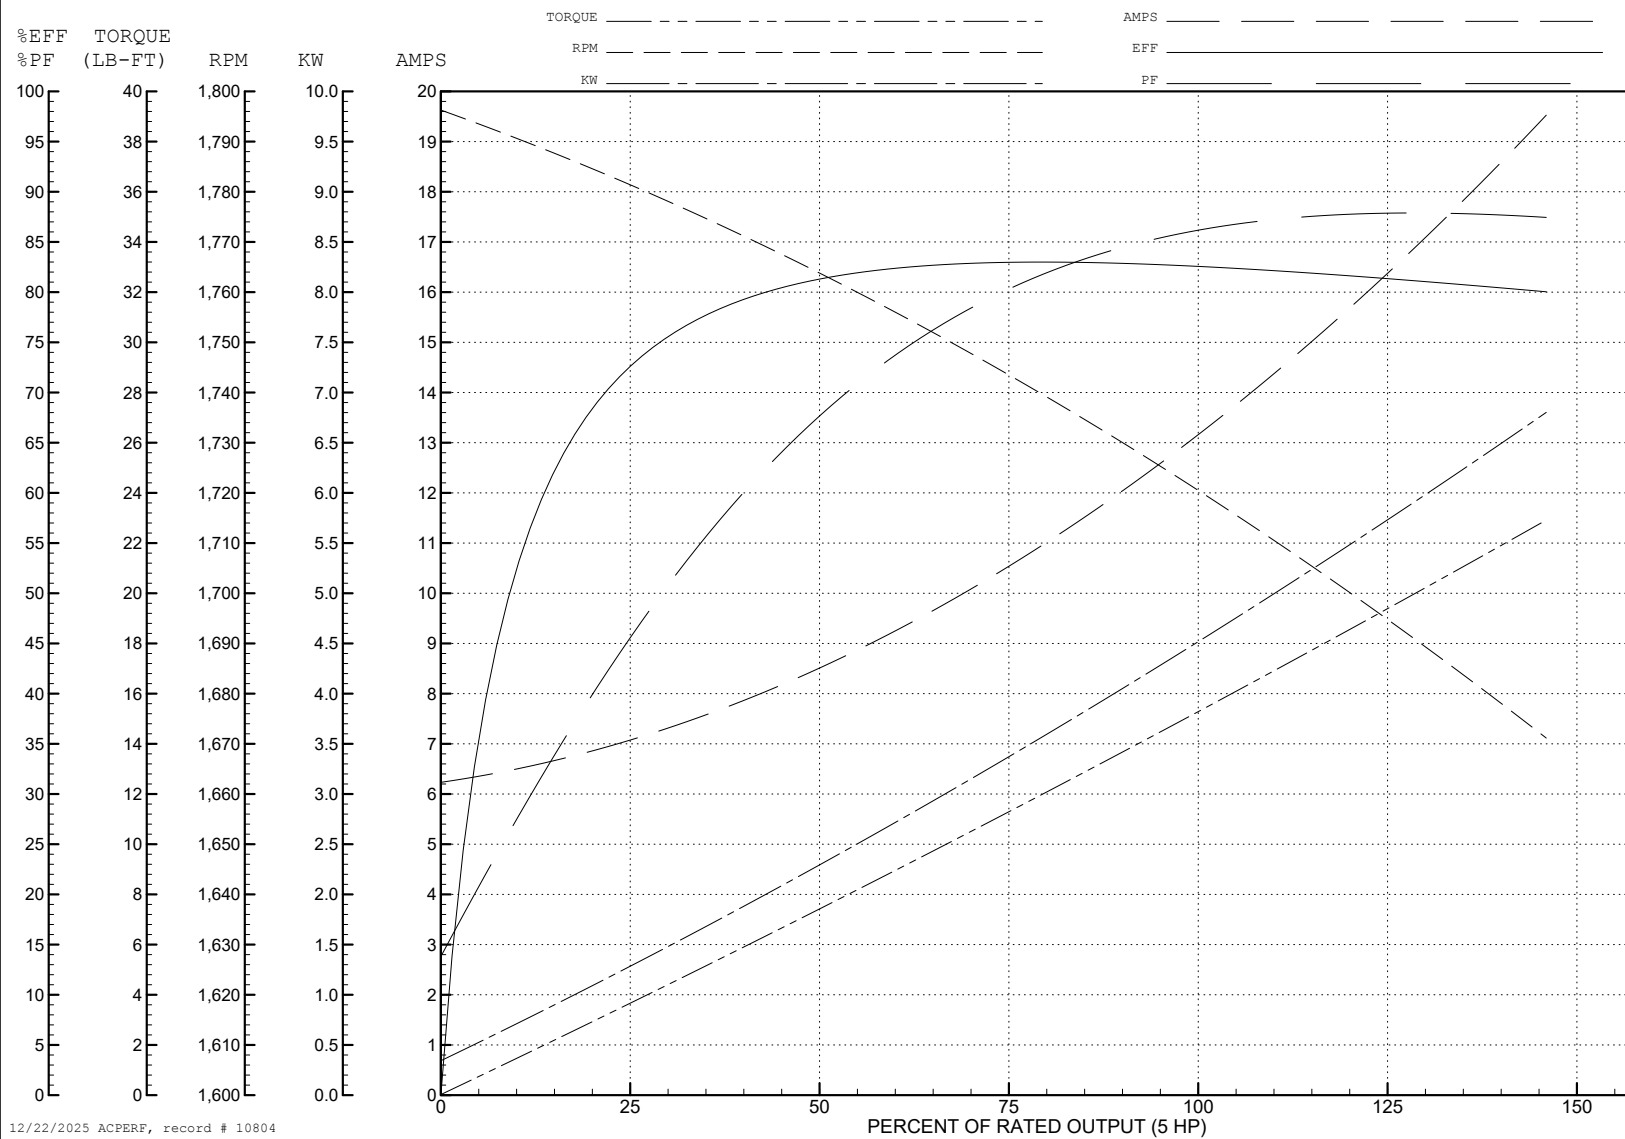

AC Induction Motor Performance Data

Record # 10805

Typical performance - not guaranteed values

Winding: 36WGW605-R001			Type: 3634M		Enclosure: OPEN			
Nameplate Data			230 V, 60 Hz: Low Speed Connection					
Rated Output (HP)		5/1.3	Full Load Torque		8 LB-FT			
Volts		230	Start Configuration		direct on line			
Full Load Amps		13.2/5	Breakdown Torque		19 LB-FT			
R.P.M.		1725/850	Pull-up Torque		10 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		11.5 LB-FT		
NEMA Design Code		B	KVA Code	J	Starting Current		19.2 A	
Service Factor (S.F.)		1		No-load Current		3.6 A		
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C		4.05 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		54°C		

Load Characteristics 230 V, 60 Hz, 1.3 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	32	47	59	67	73	77
Efficiency	51.8	65.8	71	72.6	72.2	70.3
Speed	886	875	863	849	833	812
Line amperes	3.7	4	4.4	5	5.7	6.7


ABB Motors and Mechanical Inc.


WINDING # 36WGW605

Typical performance - not guaranteed values.


1.3 HP 3 PH 60 HZ 849 RPM 230 V 3634M

TORQUES (LB-FT): PO=19 PU=10 LR=11.5 LRA=19.2

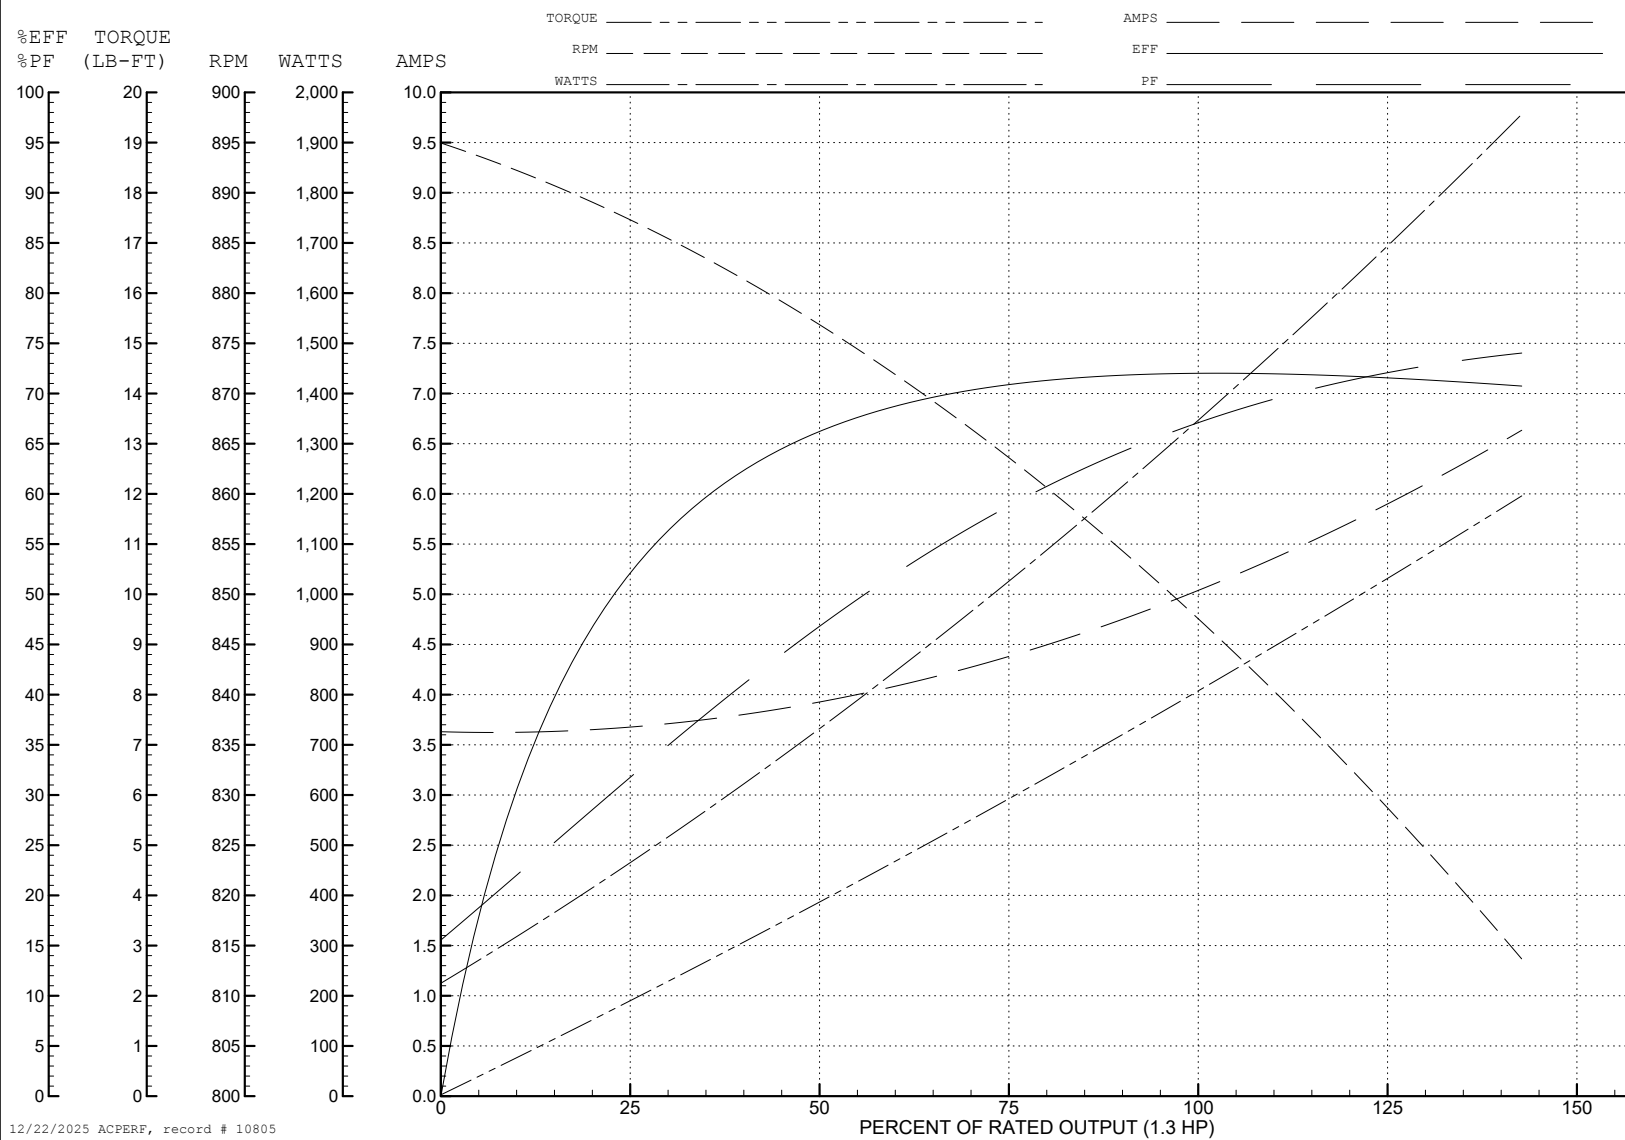

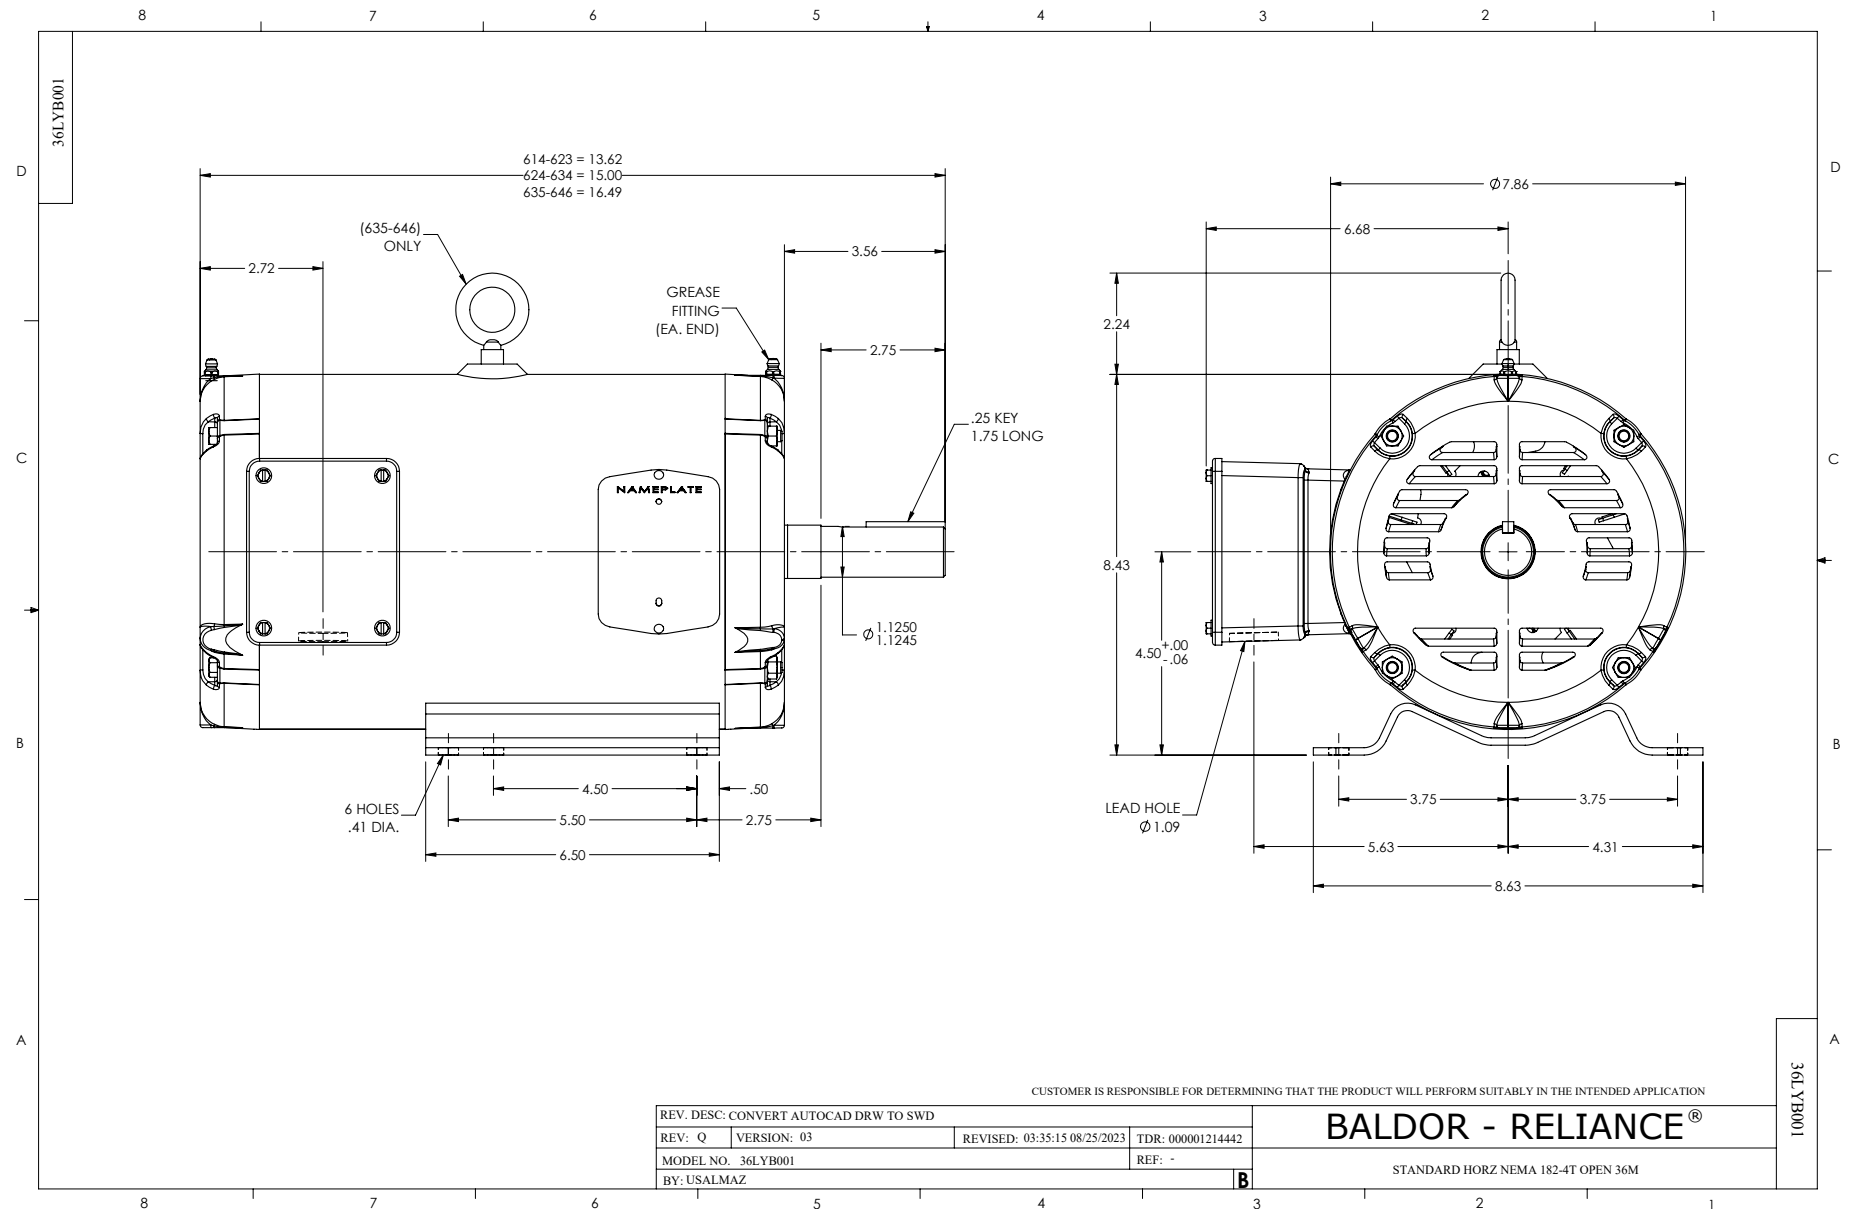

CD0032

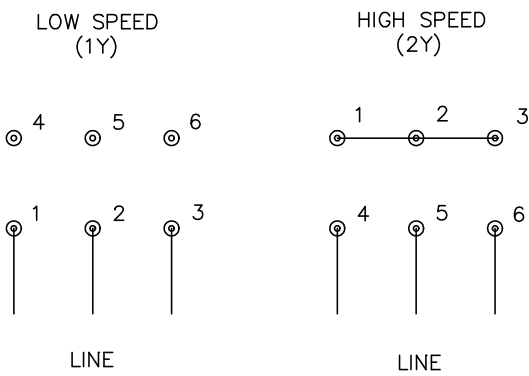

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/22/99 8:27	TDR: 0171435
CD0032		FILE: AAA00005145	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, SV, 6 LEADS, 2-SPEED 1-WINDING VARIABLE TORQUE

CD0032