



Customer information packet

M1506T

2/1HP, 1725/850RPM, 3PH, 60HZ, 184T, 3628M

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	184T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	2.000 HP @ 60 HZ 1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	900 RPM @ 60 HZ
Voltage @ Frequency	208.0 V @ 60 HZ 230.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.200 A @ 230.0 V 5.500 A @ 208.0 V
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	5.2 a
Insulation Class	F

Part detail

Revision	AC
Type	AC
Mech. spec.	36A001
Base	
Status	PRD/A
Elec. spec.	36WG0629
Layout	36LYA001
Eff. date	05-20-2025
CD Diagram	CD0011
Poles	04/08
Leads	6#16
Proprietary	False
Created date	01-01-0001

Inverter Code	Not Inverter
KVA Code	D
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Exit	Ko Box
Motor Lead Quantity/Wire Size	6 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3628M
Mounting Arrangement	F1
Number of Poles	4 8
Overall Length	16.54 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1725 rpm 850 rpm
Speed Code	2S-1W-CT
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L									
CAT.NO.	M1506T								
SPEC.	36A01-629								
HP	2/1								
VOLTS	208-230								
AMP	5.5/5.2								
RPM	1725/850								
FRAME	184T		HZ	60		PH	3		
SER.F.	1.15	CODE	D	DES	-	CLASS	F		
NEMA-NOM-EFF		PF							
RATING	40C AMB-CONT								
CC									
DE	6206		ODE	6205					
ENCL	TEFC	SN							

Accessories

Part number	Description	Multiplier
36-3301	C FACE KIT	A8
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8

AC Induction Motor Performance Data

Record # 50538

Typical performance - not guaranteed values

Winding: 36WG0629-R002			Type: 3628M		Enclosure: TEFC			
Nameplate Data			230 V, 60 Hz: High Speed Connection					
Rated Output (HP)		2/1	Full Load Torque		6.2 LB-FT			
Volts		208-230	Start Configuration		direct on line			
Full Load Amps		5.5/5.2	Breakdown Torque		18 LB-FT			
R.P.M.		1725/850	Pull-up Torque		14 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		14 LB-FT		
NEMA Design Code		-	KVA Code	D	Starting Current		25 A	
Service Factor (S.F.)		1.15		No-load Current		1.7 A		
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C		3.19 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		60°C		
S.F. Amps				Temp. Rise @ S.F. Load		77°C		
				Locked-rotor Power Factor		67.1		
				Rotor inertia		0.263 LB-FT2		

Load Characteristics 230 V, 60 Hz, 2 HP

% of Rated Load	25	50	75	100	125	S.F.
Power Factor	54	73	82	85	87	86
Efficiency	78	81	79	76	71	73
Speed	1760	1722	1680	1628	1571	1594
Line amperes	2.3	3.2	4.3	5.6	7	6.44


ABB Motors and Mechanical Inc.

WINDING # 36WG0629

Typical performance - not guaranteed values.

2 HP 3 PH 60 HZ 1628 RPM 230 V 3628M

TORQUES (LB-FT): PO=18 PU=14 LR=14 LRA=25

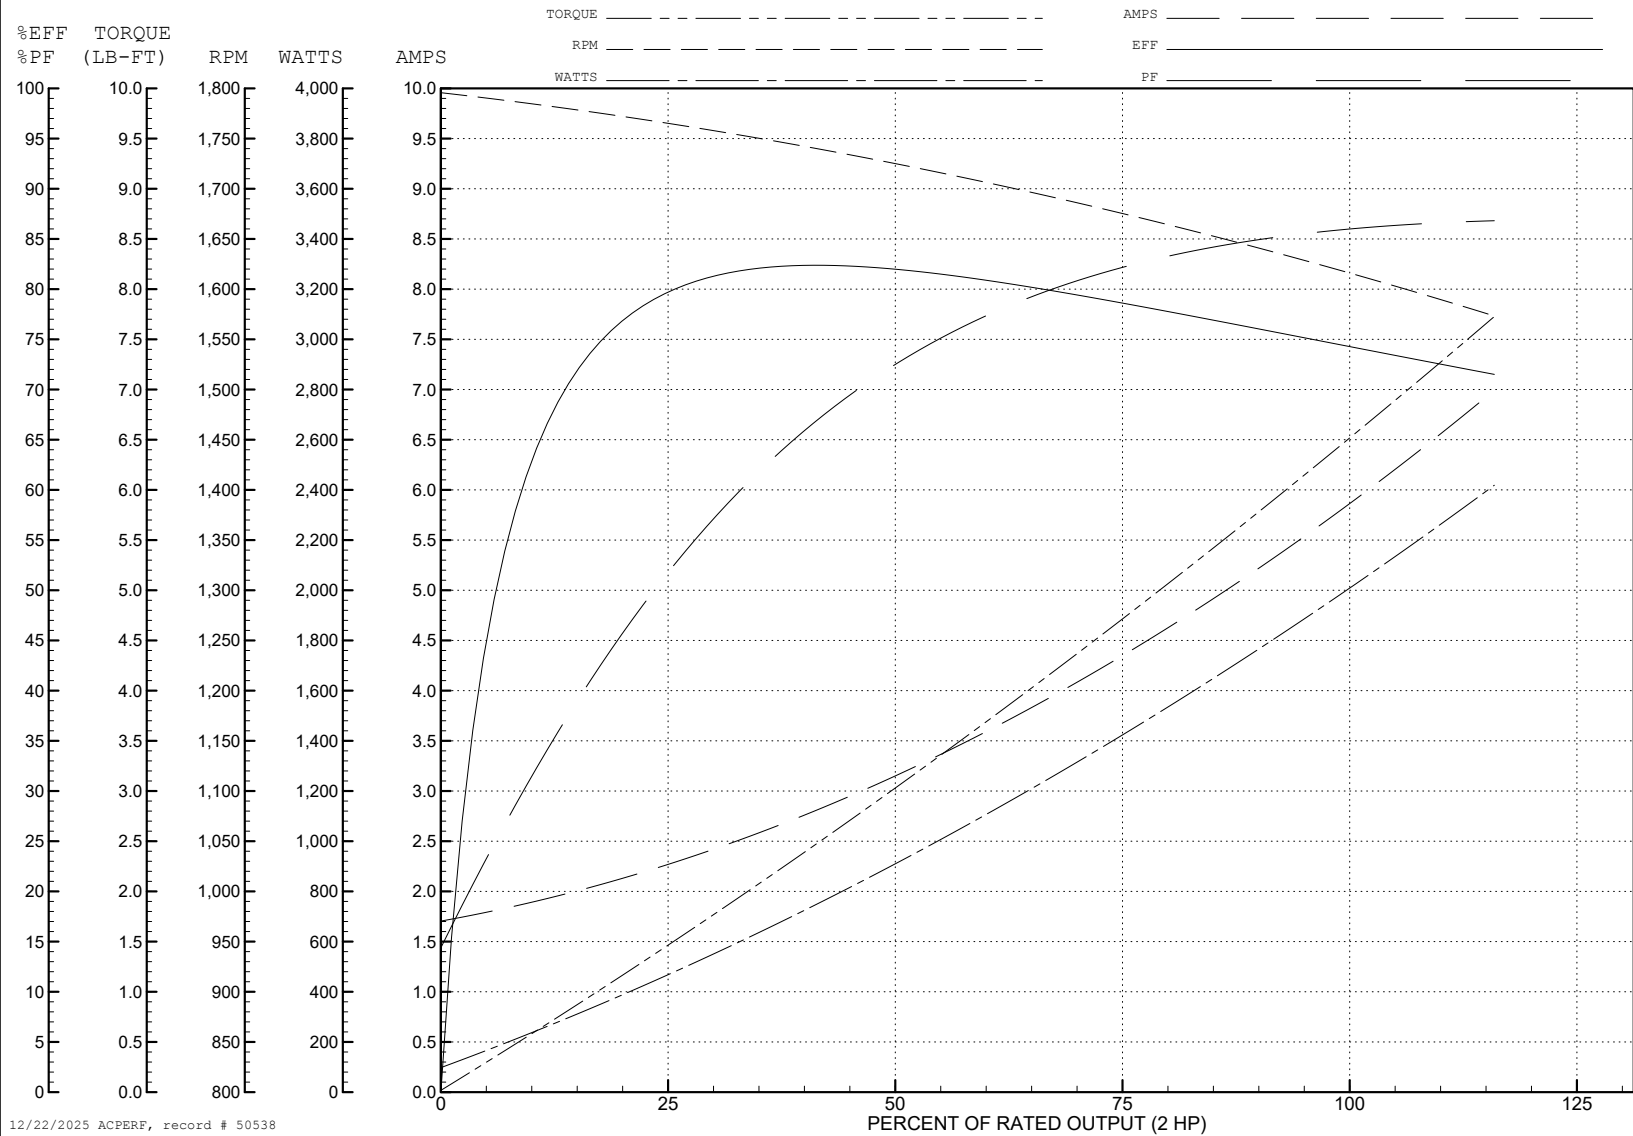

AC Induction Motor Performance Data

Record # 50539

Typical performance - not guaranteed values

Winding: 36WG0629-R002			Type: 3628M		Enclosure: TEFC			
Nameplate Data			230 V, 60 Hz: Low Speed Connection					
Rated Output (HP)		2/1	Full Load Torque		6.1 LB-FT			
Volts		208-230	Start Configuration		direct on line			
Full Load Amps		5.5/5.2	Breakdown Torque		21 LB-FT			
R.P.M.		1725/850	Pull-up Torque		17 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		18 LB-FT		
NEMA Design Code		-	KVA Code	D	Starting Current		21 A	
Service Factor (S.F.)		1.15		No-load Current		4.7 A		
NEMA Nom. Eff.		0	Power Factor		0	Line-line Res. @ 25°C		4.37 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load		77°C		
S.F. Amps				Temp. Rise @ S.F. Load		85°C		
				Locked-rotor Power Factor		60.9		
				Rotor inertia		0.263 LB-FT2		

Load Characteristics 230 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	23	33	42	51	56	62	54
Efficiency	44.2	59	65.1	67	68.1	67	67.7
Speed	886	874	860	845	830	814	836
Line amperes	4.8	4.9	5.1	5.4	5.9	6.4	5.7

ABB Motors and Mechanical Inc.

WINDING # 36WG0629

Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 845 RPM 230 V 3628M

TORQUES (LB-FT): PO=21 PU=17 LR=18 LRA=21

