



Customer information packet

M1520T

1/.44HP, 1740/1170RPM, 3PH, 60HZ, 145T, 3528M

Class - None

Division - Not Applicable

Specifications

Enclosure	TEFC
Frame	145T
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	.440 HP @ 60 HZ 1.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	CSA UR
Ambient Temperature	60 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	3.300 A @ 208.0 V 3.200 A @ 230.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	2.2 a
Insulation Class	F

Part detail

Revision	D
Type	AC
Mech. spec.	35AA001
Base	
Status	PRD/A
Elec. spec.	35WGG360
Layout	35LYAA001
Eff. date	10-28-2025
CD Diagram	CD0013
Poles	04/06
Leads	6#18 Y
Proprietary	False
Created date	02-23-2023

Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	6 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3528M
Mounting Arrangement	F1
Number of Poles	4 6
Overall Length	13.31 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Standard
Rodent Screen	None
Service Factor	1.15
Shaft Diameter	0.875 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1170 rpm 1740 rpm
Speed Code	2S-2W-VT
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	None
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1256L											
CAT.NO.	M1520T										
SPEC.	35AA001G360G1										
HP	1/.44										
VOLTS	208-230										
AMP	3.3-3.2/2.2-2.3										
RPM	1740/1170										
FRAME	145T		HZ	60			PH	3			
SER.F.	1.15	CODE	K	DES	B		CLASS	F			
NEMA-NOM-EFF		PF									
RATING	60C AMB-CONT										
CC											
DE	6205		ODE	6203							
ENCL	TEFC	SN									
	SFA 3.62-3.41										

Accessories

Part number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

AC Induction Motor Performance Data

Record # 87847

Preliminary Data Sheet

Winding: 35WGG360-R001			Type: 3528M		Enclosure: TEFC		
Nameplate Data				230 V, 60 Hz: High Speed Connection			
Rated Output (HP)		1/.44		Full Load Torque		3.08 LB-FT	
Volts		208-230		Start Configuration		direct on line	
Full Load Amps		3.3-3.2/2.2-2.3		Breakdown Torque		9.55 LB-FT	
R.P.M.		1740/1170		Pull-up Torque		5.68 LB-FT	
Hz	60	Phase	3	Locked-rotor Torque		9.18 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		20 A
Service Factor (S.F.)		1.15		No-load Current		2 A	
NEMA Nom. Eff.		0	Power Factor	0	Line-line Res. @ 25°C		7.79 Ω
Rating - Duty		60C AMB-CONT		Temp. Rise @ Rated Load		57°C	
S.F. Amps				Temp. Rise @ S.F. Load		68°C	
				Locked-rotor Power Factor		86.3	
				Rotor inertia		0.202 lb-ft²	

Load Characteristics 230 V, 60 Hz, 1 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	39	44	72	80	85	89	83
Efficiency	61.5	73.6	76.9	77.5	76.3	74	76.8
Speed	1783	1769	1752	1733	1711	1686	1720
Line amperes	2.07	1.28	2.6	3.07	3.63	4.19	3.41


ABB Motors and Mechanical Inc.

WINDING # 35WGG360

Typical performance - not guaranteed values.

1 HP 3 PH 60 HZ 1733 RPM 230 V 3528M

TORQUES (LB-FT): PO=9.55 PU=5.68 LR=9.18 LRA=20

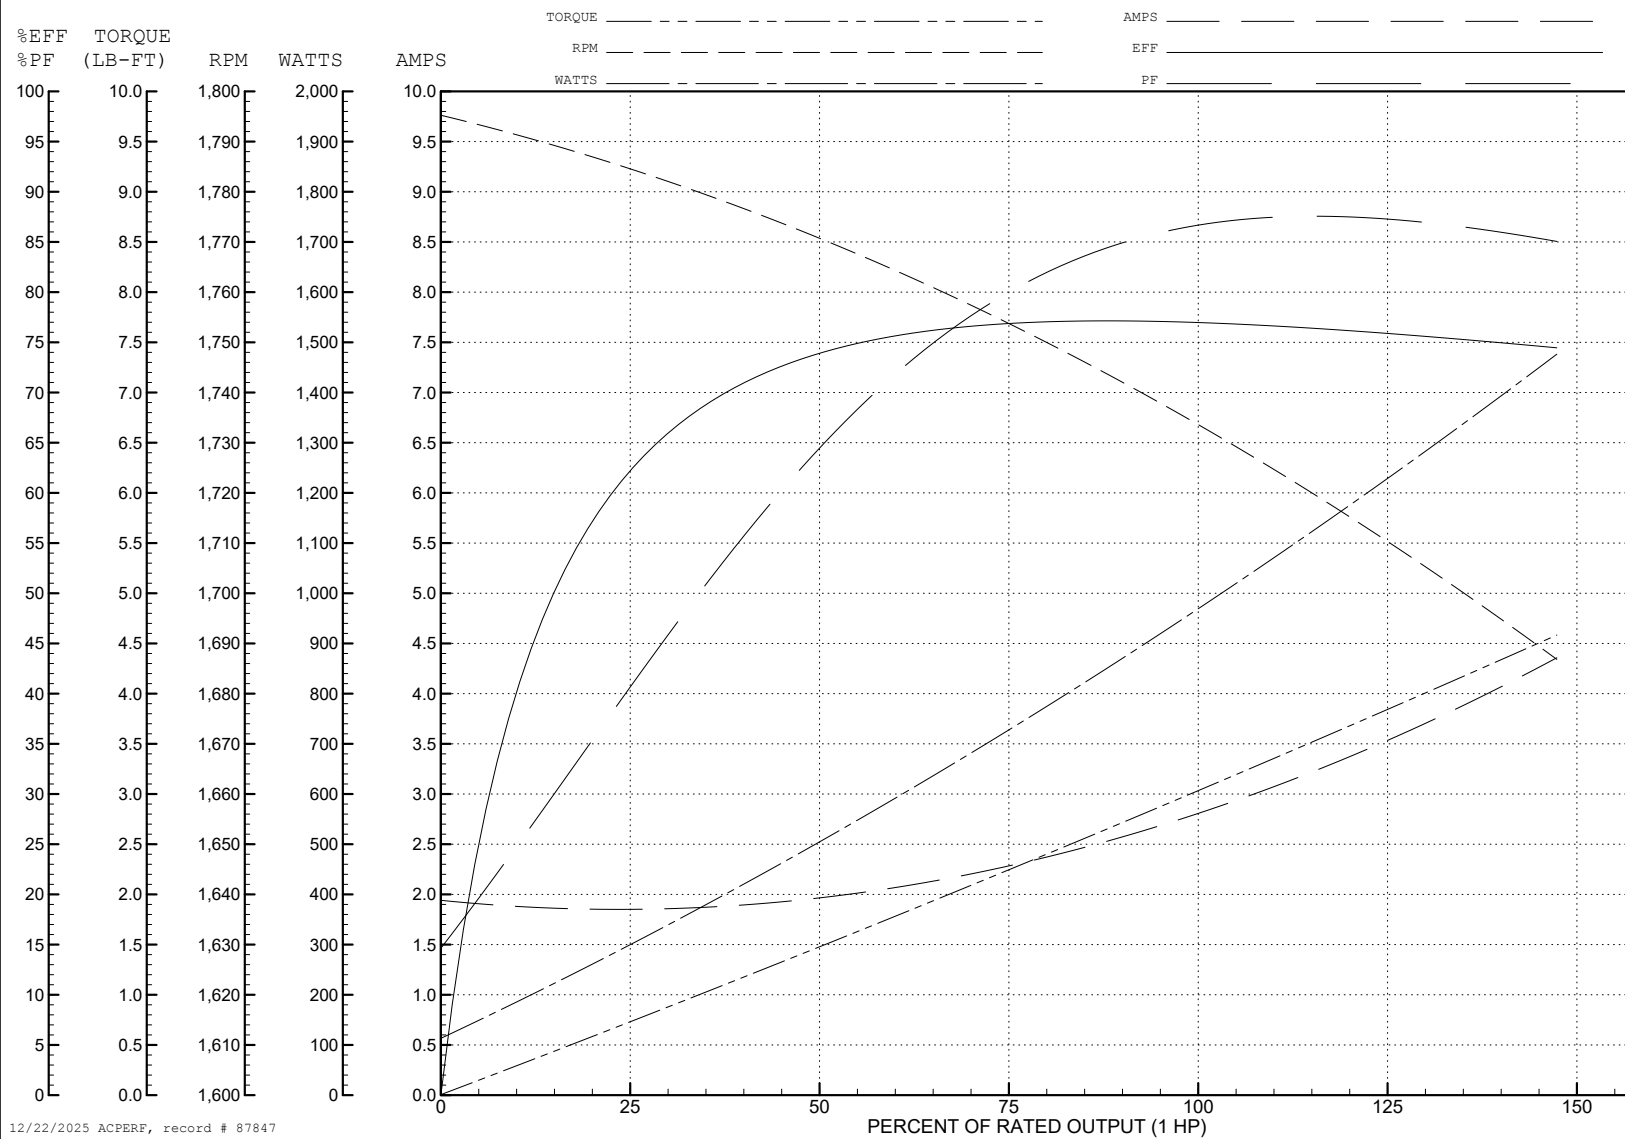

AC Induction Motor Performance Data

Record # 87848

Preliminary Data Sheet

Winding: 35WGG360-R001			Type: 3528M		Enclosure: TEFC		
Nameplate Data			230 V, 60 Hz: Low Speed Connection				
Rated Output (HP)		1/.44	Full Load Torque		1.97 LB-FT		
Volts		208-230	Start Configuration		direct on line		
Full Load Amps		3.3-3.2/2.2-2.3	Breakdown Torque		8.6 LB-FT		
R.P.M.		1740/1170	Pull-up Torque		4.59 LB-FT		
Hz	60	Phase	3	Locked-rotor Torque		5.78 LB-FT	
NEMA Design Code		B	KVA Code	K	Starting Current		11.8 A
Service Factor (S.F.)		1.15		No-load Current		2.19 A	
NEMA Nom. Eff.		0	Power Factor	0	Line-line Res. @ 25°C		13.8 Ω
Rating - Duty		60C AMB-CONT		Temp. Rise @ Rated Load			
				Locked-rotor Power Factor		86.3	
				Rotor inertia		0.202 lb-ft²	

Load Characteristics 230 V, 60 Hz, 0.44 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	25	35	44	52	60	67	57
Efficiency	37.4	53.6	62.2	66.9	69.6	70.9	68.5
Speed	1193	1188	1182	1175	1168	1161	1171
Line amperes	2.19	2.21	2.27	2.35	2.46	2.61	2.42

ABB Motors and Mechanical Inc.

WINDING # 35WGG360

Typical performance - not guaranteed values.

0.44 HP 3 PH 60 HZ 1175 RPM 230 V 3528M

TORQUES (LB-FT): PO=8.6 PU=4.59 LR=5.78 LRA=11.8

