



Customer information packet

RM3154A

1.5HP, 1720RPM, 3PH, 60HZ, 56H, 3518M, OPSB, F1

Class - None

Division - Not Applicable

Specifications

Enclosure	OPSB
Frame	56H
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	1.500 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	1800 RPM @ 60 HZ
Voltage @ Frequency	460.0 V @ 60 HZ 230.0 V @ 60 HZ 208.0 V @ 60 HZ
Agency Approvals	C UR US
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Resilient
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	5.000 A @ 230.0 V 4.800 A @ 208.0 V 3.200 A @ 208.0 V 2.500 A @ 460.0 V
Design Code	B
Drip Cover	No Drip Cover
Duty Rating	CONT
Efficiency @ 100% Load	80.0 %
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Shaft Indicator	None
Heater Indicator	No Heater

Part detail

Revision	C
Type	AC
Mech. spec.	35N501
Base	
Status	PRD/A
Elec. spec.	35WGG311
Layout	35LYN501
Eff. date	11-12-2024
CD Diagram	CD0007
Poles	04
Leads	12#18
Proprietary	False
Created date	12-19-2022

High Voltage Full Load Amps	2.5 a
Insulation Class	F
Inverter Code	Inverter Ready
IP Rating	NONE
KVA Code	N
Lifting Lugs	No Lifting Lugs
Locked Bearing Indicator	No Locked Bearing
Motor Lead Quantity/Wire Size	12 @ 18 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3518M
Mounting Arrangement	F1
Number of Poles	4
Overall Length	12.42 IN
Power Factor	69
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Resilient Mount
Pulley Shaft Indicator	Standard
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.15
Shaft Diameter	0.625 IN
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	No Slinger
Speed	1720 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Do Not Use Eve-Not Valid
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	Automatic Thermal Overload
Winding Thermal 1 Location	ES

Winding Thermal 2

None

Nameplate

NP1257L											
CAT.NO.	RM3154A										
SPEC.	35N501G311G1										
HP	1.5										
VOLTS	208-230/460										
AMP	4.8-5/2.5										
RPM	1720										
FRAME	56H				HZ	60			PH	3	
SER.F.	1.15		CODE	N		DES	B		CL	F	
NEMA-NOM-EFF	80		PF	69							
RATING	40C AMB-CONT										
CC											
DE	6205		ODE		6203						
ENCL	OPSB		SN								
	SFA 5.4-5.5/2.75										

AC Induction Motor Performance Data

Record # 87521

Typical performance - not guaranteed values

Winding: 35WGG311-R001			Type: 3518M		Enclosure: OPEN			
Nameplate Data			460 V, 60 Hz: High Voltage Connection					
Rated Output (HP)		1.5	Full Load Torque		4.57 LB-FT			
Volts		208-230/460	Start Configuration		direct on line			
Full Load Amps		4.8-5/2.5	Breakdown Torque		16.13 LB-FT			
R.P.M.		1720	Pull-up Torque		12.9 LB-FT			
Hz	60	Phase	3	Locked-rotor Torque		14.8 LB-FT		
NEMA Design Code		B	KVA Code	N	Starting Current		15.6 A	
Service Factor (S.F.)		1.15	No-load Current		1.76 A			
NEMA Nom. Eff.		80	Power Factor		69	Line-line Res. @ 25°C		15.6 Ω
Rating - Duty		40C	AMB-CONT		Temp. Rise @ Rated Load		51°C	
S.F. Amps		5.4-5.5/2.75	Temp. Rise @ S.F. Load		61°C			
			Locked-rotor Power Factor		73.2			
			Rotor inertia		0.13 lb-ft²			

Load Characteristics 460 V, 60 Hz, 1.5 HP

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor	28	46	59	68	75	79	72
Efficiency	69.4	79.2	81.5	81.6	80.4	78.3	80.9
Speed	1780	1763	1743	1722	1699	1673	1708
Line amperes	1.79	1.95	2.19	2.52	2.91	3.39	2.75

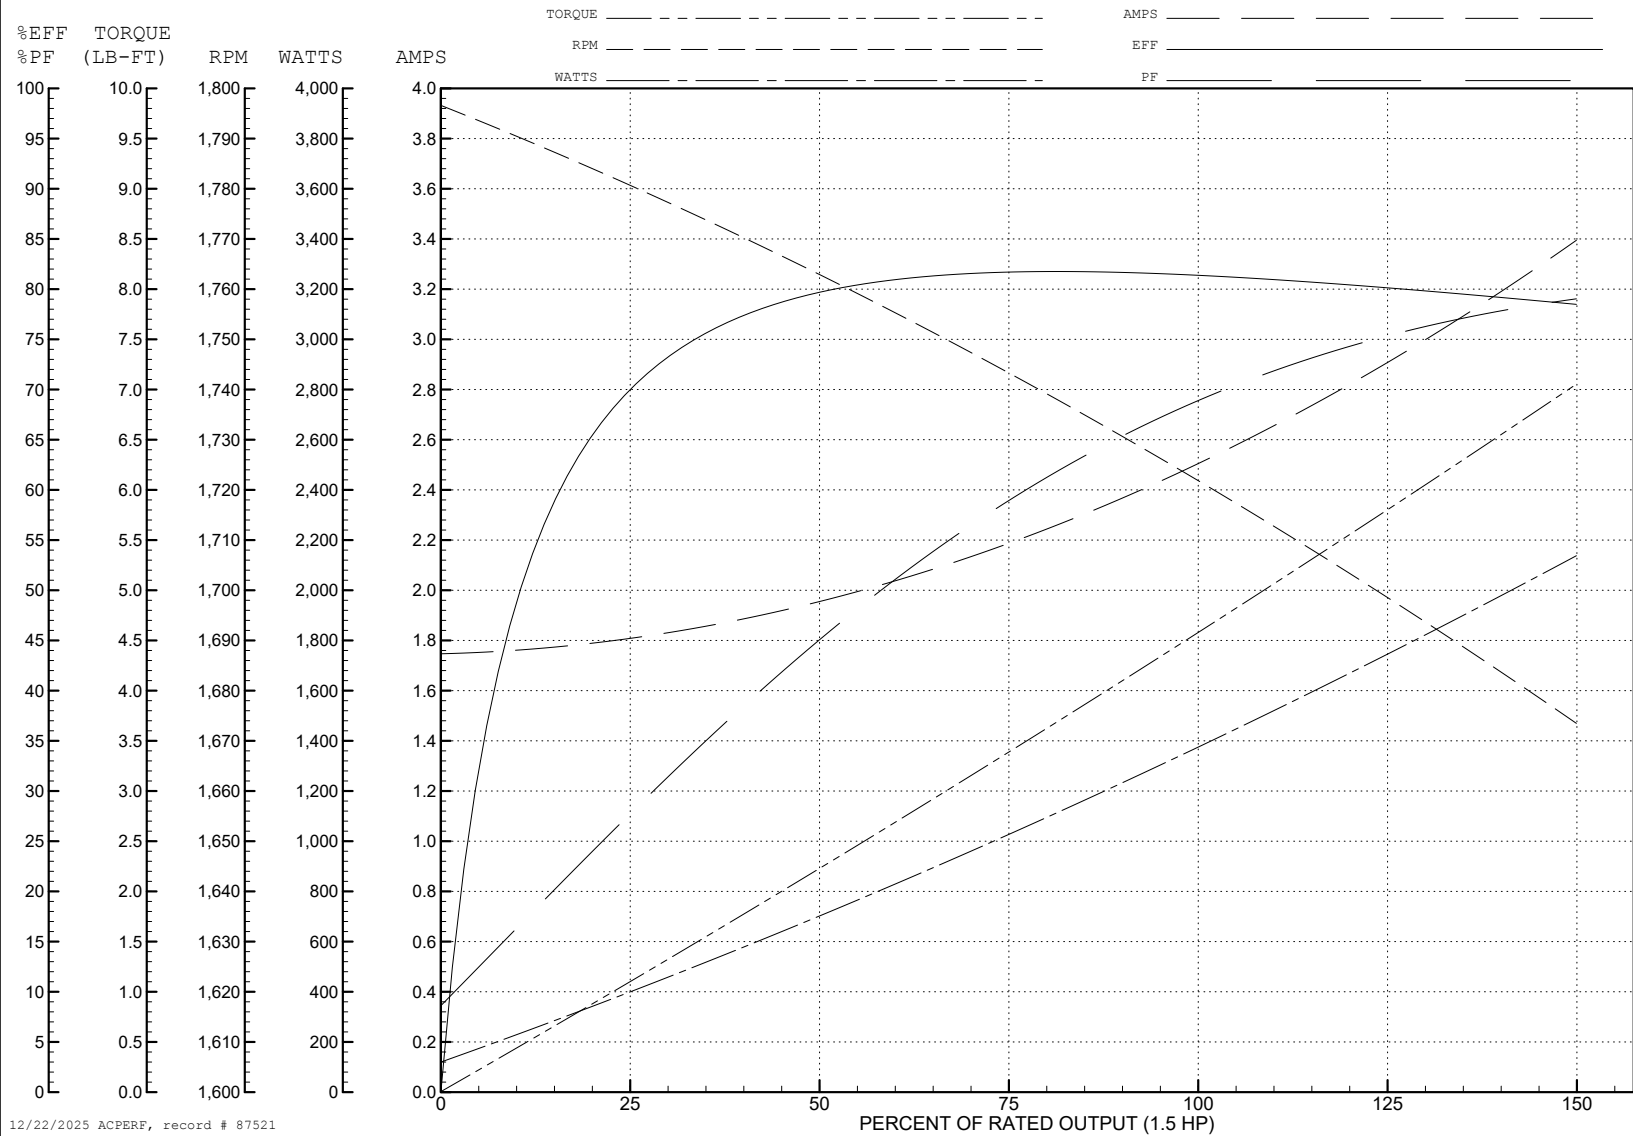
ABB Motors and Mechanical Inc.

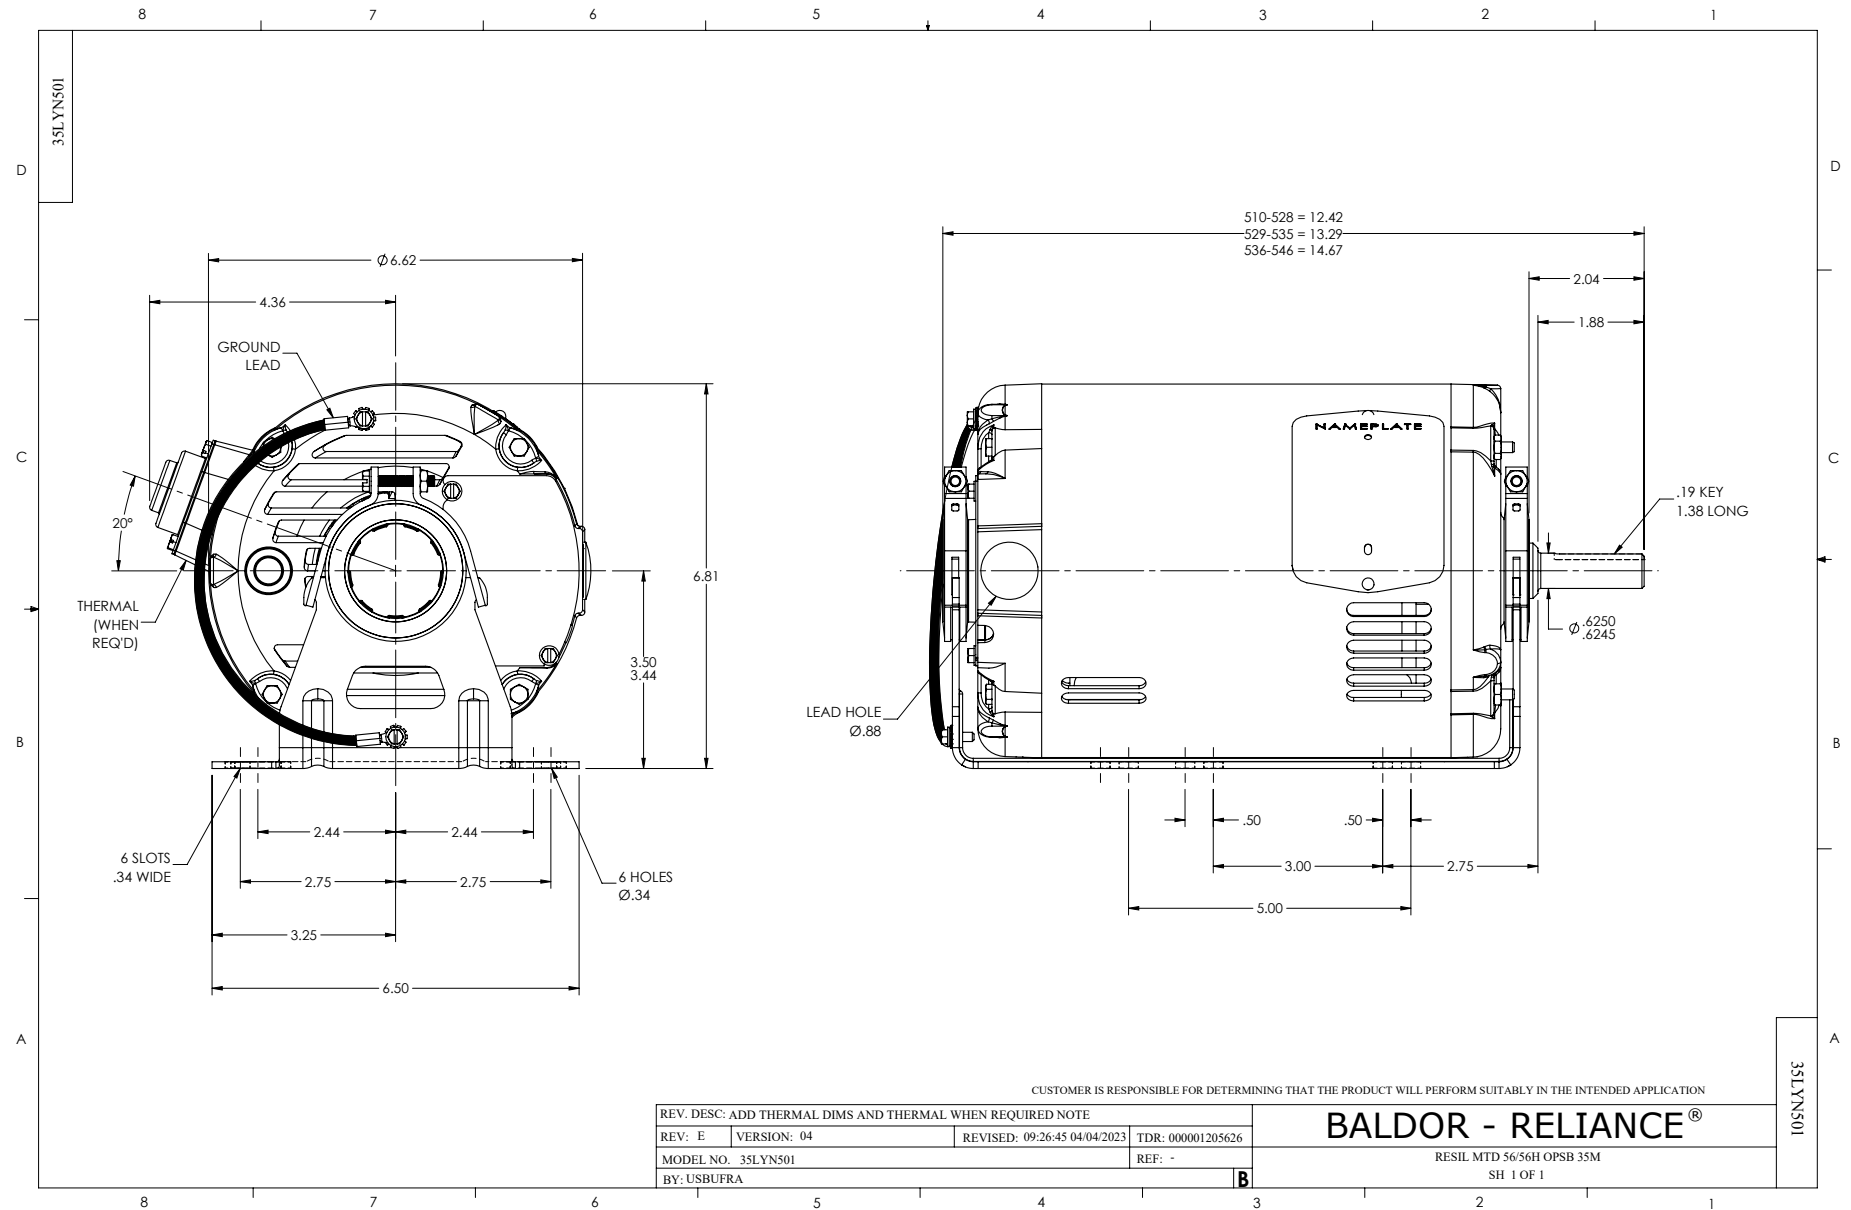
WINDING # 35WGG311

Typical performance - not guaranteed values.

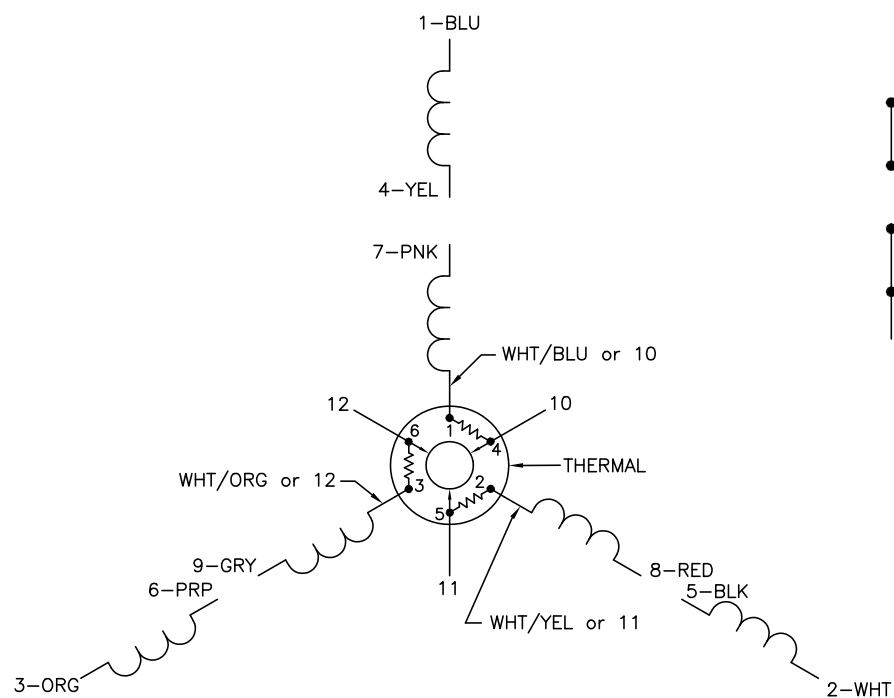

1.5 HP 3 PH 60 HZ 1720 RPM 460 V 3518M

TORQUES (LB-FT): PO=16.13 PU=12.9 LR=14.8 LRA=15.6






CD0007

LOW VOLTAGE
(2Y)

LINE

HIGH VOLTAGE
(1Y)

LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: ADDED "CK" PLANT CODE

REV. LTR: E

BY: EAH

REVISED: 05/06/99 17:1

TDR: 0181040

L00000

FILE: AAA00008370

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, DV, THERMAL, 12 LEADS

CD0007