



Customer information packet

UCME570

5-7.5 AIR OVERHP, 3450RPM, 3PH, 60HZ, 184TZ

Class - None

Division - Not Applicable

Specifications

Enclosure	TEAO
Frame	184TZ
Frame Material	Steel
Frequency	60.00 Hz
Haz Area Class and Group	None
Haz Area Division	Not Applicable
Motor Letter Type	Three Phase
Output @ Frequency	7.500 HP @ 60 HZ 5.000 HP @ 60 HZ
Phase	3
Synchronous Speed @ Frequency	3600 RPM @ 60 HZ
Voltage @ Frequency	230.0 V @ 60 HZ 460.0 V @ 60 HZ
Agency Approvals	UR CSA
Ambient Temperature	40 °C
Auxiliary Box	NO AUXILLARY BOX
Auxiliary Box Lead Termination	None
Base Indicator	Rigid
Bearing Grease Type	Polyrex EM (-20F +300F)
Blower	None
Current @ Voltage	18.000 A @ 230.0 V 19.000 A @ 208.0 V 9.000 A @ 460.0 V
Drip Cover	No Drip Cover
Duty Rating	CONT
Electrically Isolated Bearing	Not Electrically Isolated
Feedback Device	NO FEEDBACK
Front Face Code	Standard
Front Shaft Indicator	None
Heater Indicator	No Heater
High Voltage Full Load Amps	9.0 a

Part detail

Revision	P
Type	AC
Mech. spec.	36Q213
Base	
Status	PRD/A
Elec. spec.	36WGY591
Layout	36LYQ213
Eff. date	01-02-2025
CD Diagram	CD0005
Poles	02
Leads	9#16 30" long Y
Proprietary	False
Created date	03-06-2014

Insulation Class	F
Inverter Code	Not Inverter
KVA Code	K
Lifting Lugs	Standard Lifting Lugs
Locked Bearing Indicator	Locked Bearing
Motor Lead Exit	Pipe Or Pipe Adaptor
Motor Lead Quantity/Wire Size	9 @ 16 AWG
Motor Lead Termination	Flying Leads
Motor Standards	NEMA
Motor Type	3628M
Mounting Arrangement	F1
Number of Poles	2
Overall Length	15.38 IN
Product Family	General Purpose
Pulley End Bearing Type	Ball
Pulley Face Code	Standard
Pulley Shaft Indicator	Tapped & Key
Rodent Screen	None
RoHS Status	ROHS COMPLIANT
Service Factor	1.00
Shaft Diameter	1.125 IN
Shaft Extension Location	Pulley End
Shaft Ground Indicator	No Shaft Grounding
Shaft Rotation	Reversible
Shaft Slinger Indicator	Shaft Slinger
Speed	3450 rpm
Speed Code	Single Speed
Starting Method	Direct on line
Thermal Device - Bearing	None
Thermal Device - Winding	Normally Closed Thermostat
Vibration Sensor Indicator	No Vibration Sensor
Winding Thermal 1	None
Winding Thermal 2	None

Nameplate

NP1279L										
CAT.NO.	UCME570									
SPEC.	36Q213Y591G1									
HP	5-7.5 AIR OVER									
VOLTS	230/460									
AMP	18/9									
RPM	3450									
FRAME	184TZ	HZ	60	PH	3					
SER.F.	1.00	CODE	K	DES	-	CL	F			
NEMA-NOM-EFF		PF								
RATING	40C AMB-CONT									
CC										
DE	6206	ODE	6205							
ENCL	TEAO	SN								

NP3114L											
CAT.NO.	UCME570										
SPEC.	36Q213Y591G1										
HP	5-7.5 AIR OVER										
VOLTS	230/460										
AMP	18/9										
RPM	3450										
FRAME	184TZ	HZ	60	PH	3						
SER.F.	1.00	CODE	K	DES	-	CL	F				
NEMA-NOM-EFF		PF									
RATING	40C AMB-CONT										
CC		USABLE AT 208V					N/A				
DE	6206	ODE	6205								
ENCL	TEAO	SN									

Accessories

Part number	Description	Multiplier
36-3301FD	C FACE KIT FARM DUTY 182-4TC ENCL, 6206	P1
36EP1304A62SP	FLANGE MTD ENDPLATE 182-4TD -ENCL (LESS	A8

AC Induction Motor Performance Data

Record # 11424

Typical performance - not guaranteed values

Winding: 36WGY591-R001			Type: 3628M		Enclosure: TEAO		
Nameplate Data				460 V, 60 Hz: High Voltage Connection			
Rated Output (HP)		5-7.5 AIR OVER		Full Load Torque		11.3 LB-FT	
Volts		230/460		Start Configuration		direct on line	
Full Load Amps		18/9		Breakdown Torque		48 LB-FT	
R.P.M.		3450		Pull-up Torque		36 LB-FT	
Hz		60	Phase	3	Locked-rotor Torque		38 LB-FT
NEMA Design Code		- KVA Code		K	Starting Current		80 A
Service Factor (S.F.)				1	No-load Current		3.3 A
NEMA Nom. Eff.		0	Power Factor	0	Line-line Res. @ 25°C		1.79 Ω
Rating - Duty		40C AMB-CONT		Temp. Rise @ Rated Load			

Load Characteristics 460 V, 60 Hz, 7.5 HP

% of Rated Load	25	50	75	100	125	150
Power Factor	58	79	87	90	92	93
Efficiency	76.5	84.7	86.4	86.1	85.6	84.2
Speed	3566	3535	3500	3471	3432	3389
Line amperes	4.1	5.5	7.4	8.9	10.9	13.2


ABB Motors and Mechanical Inc.


WINDING # 36WGY591

Typical performance - not guaranteed values.




7.5 HP 3 PH 60 HZ 3450 RPM 460 V 3628M

TORQUES (LB-FT): PO=48 PU=36 LR=38 LRA=80

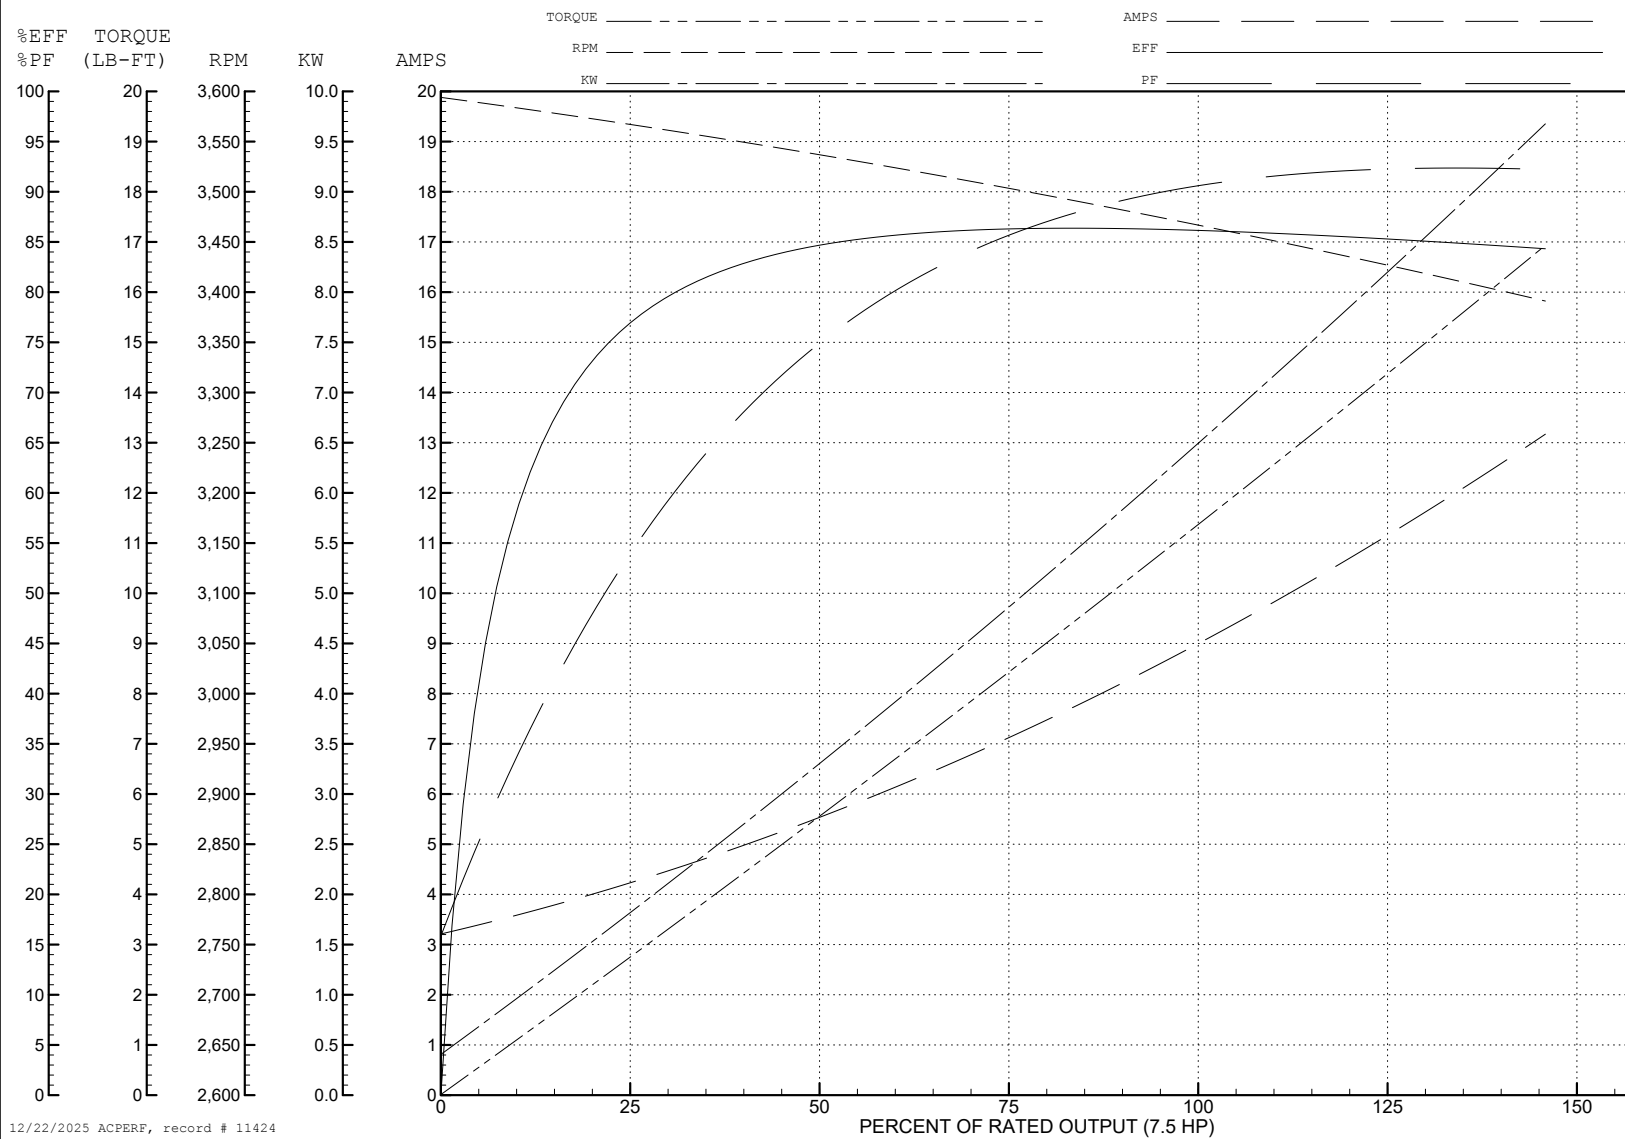

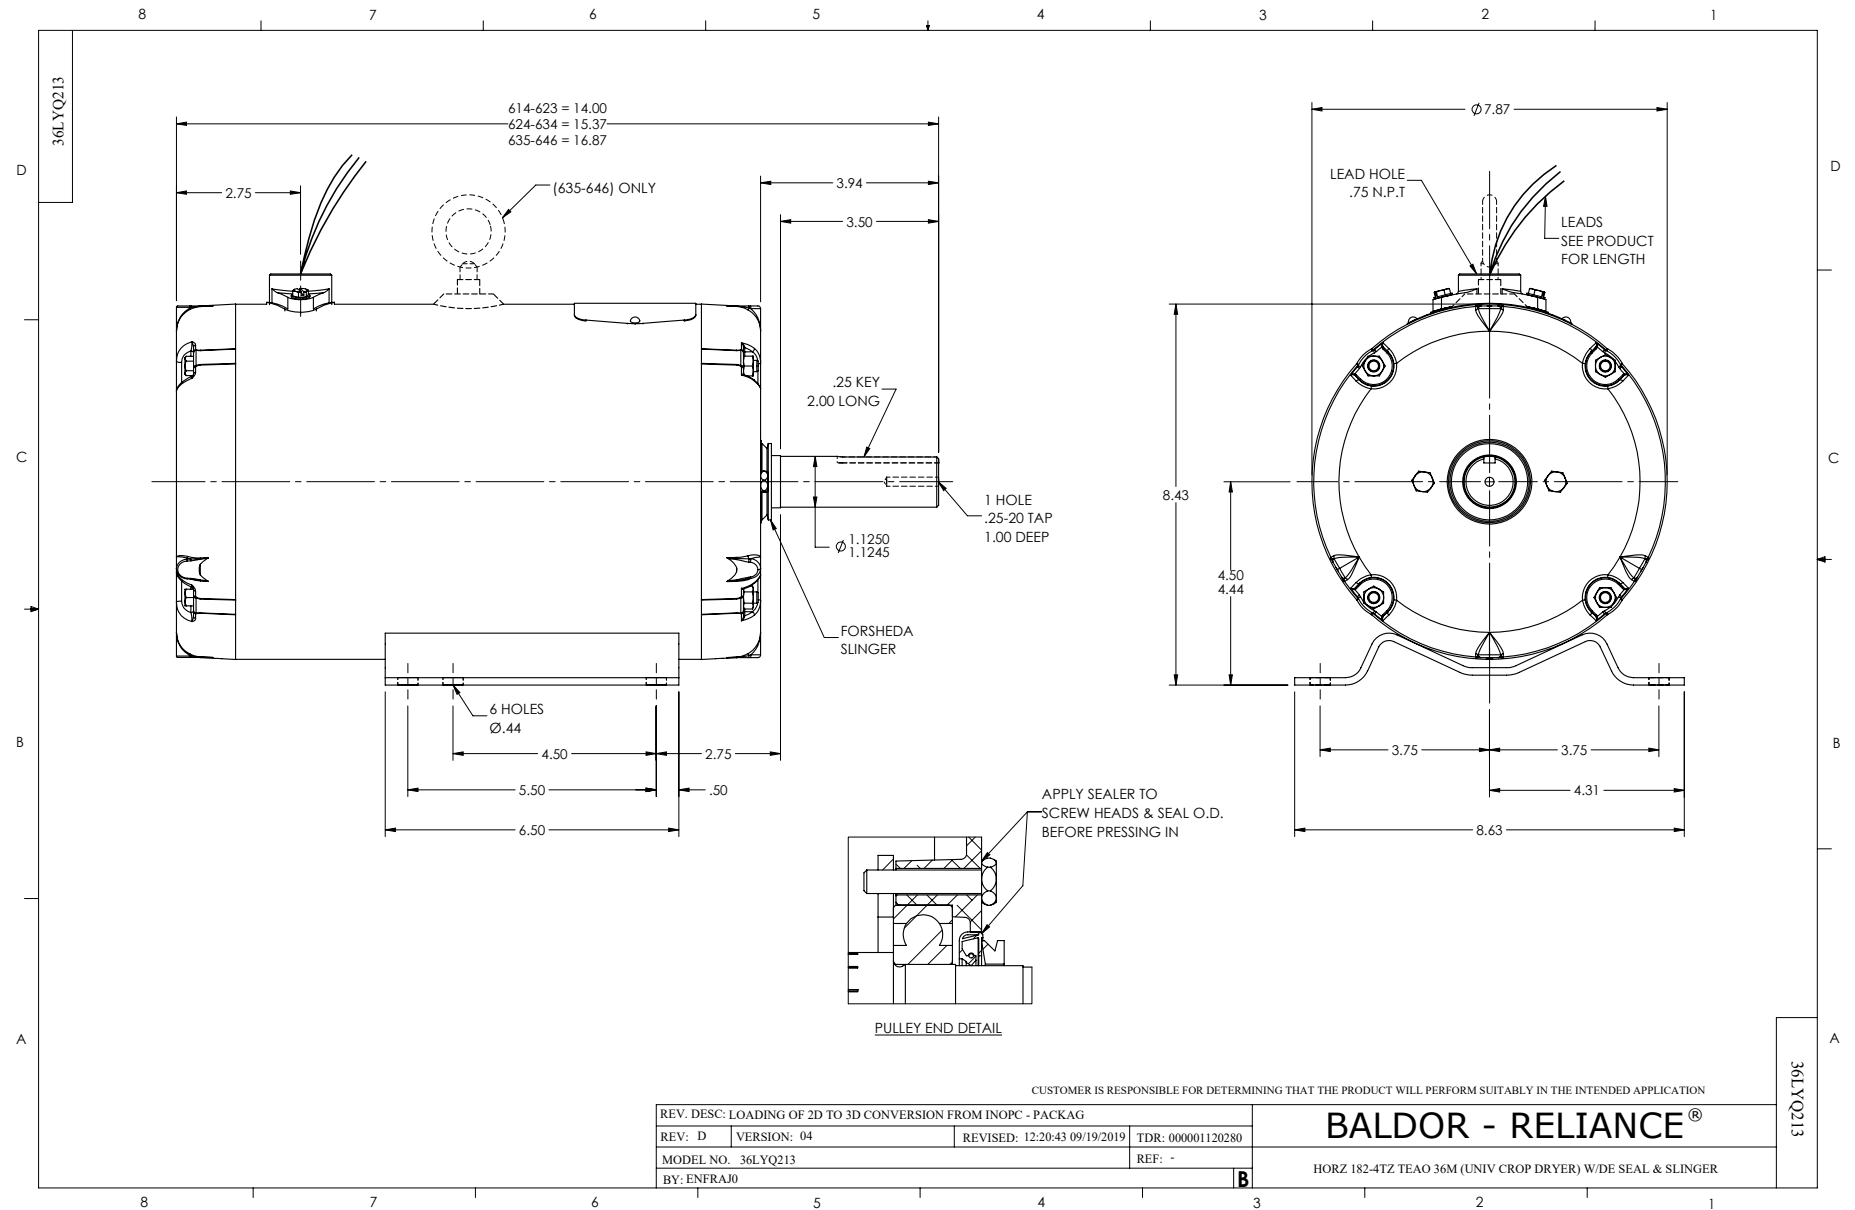

CD0005

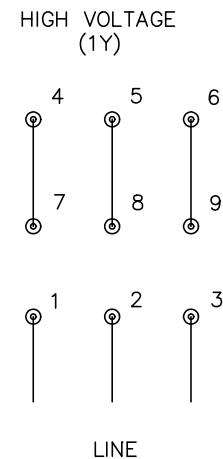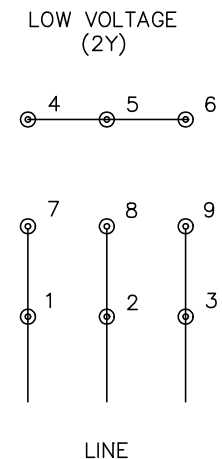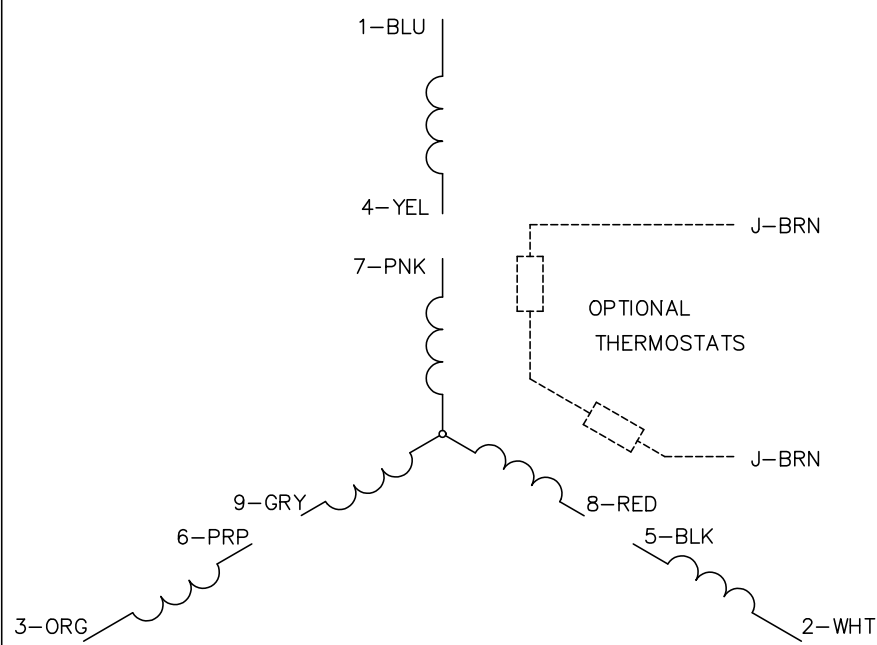

- NOTES:
- 1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
 - 2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
 - 3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
 - 4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005